

General Instructions

Please retain product label and instructions for future reference



10X6 APEX, FIXED WINDOW - 10X6 APEX, NO WINDOW

BEFORE YOU START PLEASE READ INSTRUCTIONS CAREFULLY

- Check the pack and make sure you have all the parts listed.
- When you are ready to start, make sure you have the right tools at hand (not supplied) including a Phillips screwdriver, Stanley knife, wood saw, step ladder and drill with 2mm bit.
- Ensure there is plenty of space and a clean dry area for assembly.

TIMBER

As with all natural materials, timber can be affected during various weather conditions. For the duration of heavy or extended periods of rain, swelling of the wood panels may occur. Warping of the wood may also occur during excessive dry spells due to an interior moisture loss. Unfortunately, these processes cannot be avoided but can be helped. It is suggested that the outdoor building is sprayed with water during extended periods of warm sunshine and sheltered as much as possible during rain or snow.

Our buildings are pre treated with a water based treatment^{**}; this only helps to protect the product during transit and for upto 3 months against mould. To validate your guarantee and ensure longevity of the product, it is ESSENTIAL the building is treated with a wood preserver within the first three months of assembly and thereafter in accordance with the manufactures recommendations. Care must be taken to ensure the product is placed on a suitable base.

BUILDING A BASE

When thinking about where the building and base is going to be constructed: Ensure that there will be access to all sides for maintenance work and annual treatment.


Ensure the base is level and is built on firm ground, to prevent distortion. Refer to diagrams for the base dimensions, The base should be slightly smaller than the external measurement of the building, i.e. The cladding should overlap the base, creating a run off for water. It is also recommended that the floor be at least 25mm above the surrounding ground level to avoid flooding.

TYPES OF BASE

- Concrete 75mm laid on top of 75mm hard-core.
- Slabs laid on 50mm of sharp sand.

Whilst all products manufactured are made to the highest standards of Safety and in the case of childrens products independently tested to EN71 level, we cannot accept responsibility for your safety whilst erecting or using this product.

Refer to the instructions pages for you specific product code



x2

All building's should be erected by two adults



Winter = High Moisture = Expansion
Summer = Low Moisture = Contraction



2mm Drill bit

For ease of assembly, you **MUST** pilot drill all screw holes and ensure all screw heads are countersunk.



CAUTION

Every effort has been made during the manufacturing process to eliminate the prospect of splinters on rough surfaces of the timber. You are strongly advised to wear gloves when working with or handling rough sawn timber.

****Protim Aquatan T5 (621)****

Your building has been treated with **Aquatan**.

Aquatan is a water-based concentrate which is diluted with water, the building as been treated by the correct application of Aquatan solution and then allowed to dry.

Aquatan is a decorative finish to colour the wood, which is applied industrially to timber fence panels and garden buildings.

Aquatan *undiluted* contains: boric acid, sodium hydroxide 32% solution, aqueous mixture of sodium dioctyl sulphosuccinat and alcohols: 2, 4, 6-trichlorophenol.

For assistance please contact customer care on: 01636 880514

**Mercia Garden Products Limited,
Sutton On Trent,
Newark,
Nottinghamshire,
NG23 6QN**


www.merciagardenproducts.co.uk

Overall Dimensions:

Length = 3028mm
Width = 2484mm
Height = 2121mm


Base Dimensions:

Length = 3016mm
Width = 2414mm

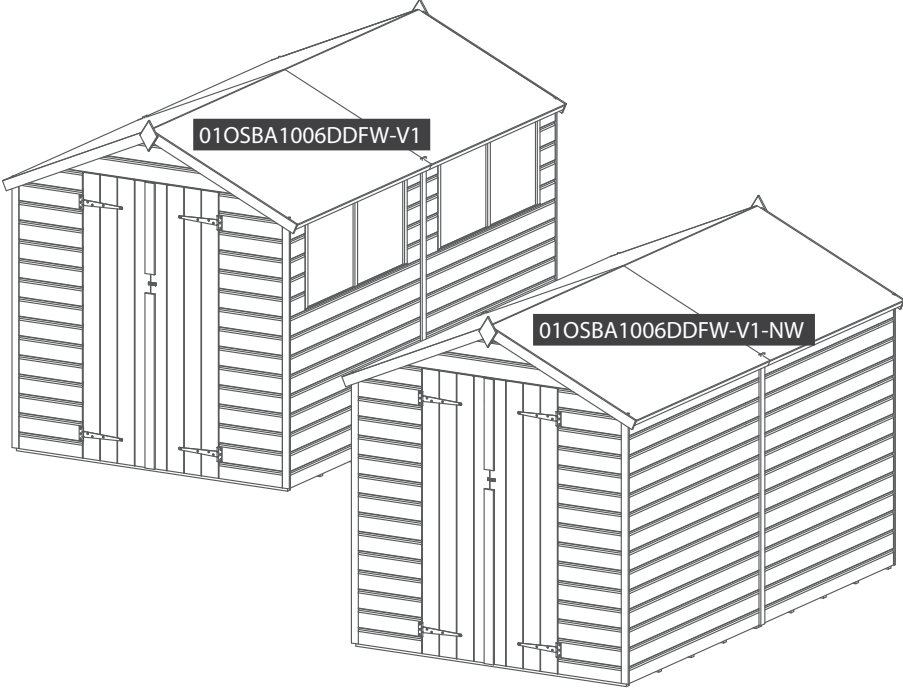


Building content


- 1




Door Gable
- 2




Back Gable
- 3




Plain Side Qty 2
Qty 4 - NW Only
- 4




Window Panel Qty 2
FW-V1 ONLY
- 5



Floor
Qty 2
- 6



Roof
Qty 4
- 7



Door
Qty 2

8



Ridge Bar - 1462mm Qty 2

9



Truss Frame - 932mm Qty 2

10



Truss Support - 450mm Qty 1

11



Truss Block - 140mm Qty 2

12



Door Block - 140mm Qty 2

13



Fascia - 1016mm Qty 4

14



Door Strip - 1016mm Qty 1

15



Door Strip - 530mm Qty 1

16



Cover Trim - 1575mm Qty 6

17



Door Beading Strip - 1590mm Qty 2

18



Eaves Frame - 1502mm Qty 4

19



Window Strip - 546mm Qty 10 - FW Only

20



Finial
Qty 2

21



Felt

22



T Hinge Qty 4

23



L-Bracket
Qty 2

24



Turn Button
Qty 3

25



Plastic Window Cill
Qty 2 - FW Only

26



U Channel

27



Styrene
Qty 4
- FW Only

Nail Bag

- 

40mm Screw x 116
- 

Felt Tacks x 120
- 

50mm Screw x 28
- 


30mm Screw x 76
- 

70mm Screw x 24
- 

30mm Black Screw x 3



Pre Assembly

Remove transportation
blocks from the bottom
of each panel before
beginning assembly. Each
Panel should have two

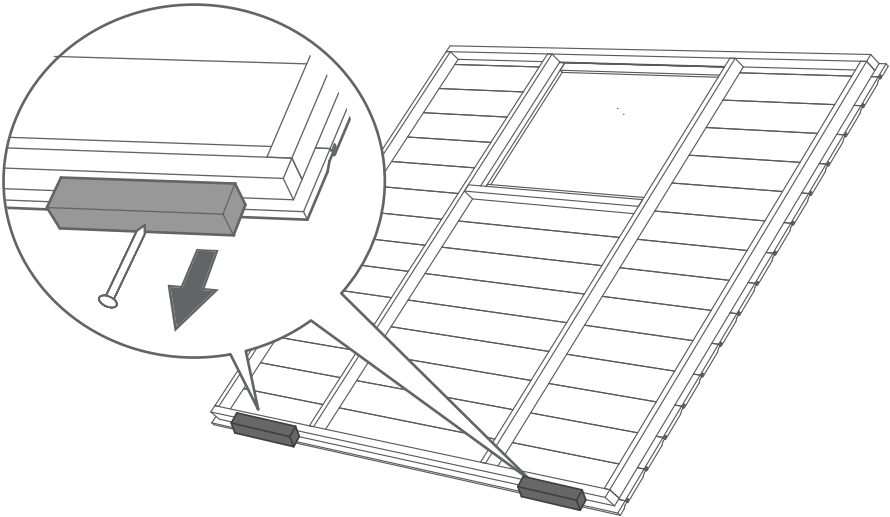

Fix the T Hinges onto the
doors and door frame as
shown. Ensure that the
screws go through the
cladding and into the
framing behind.

28x30mm screws

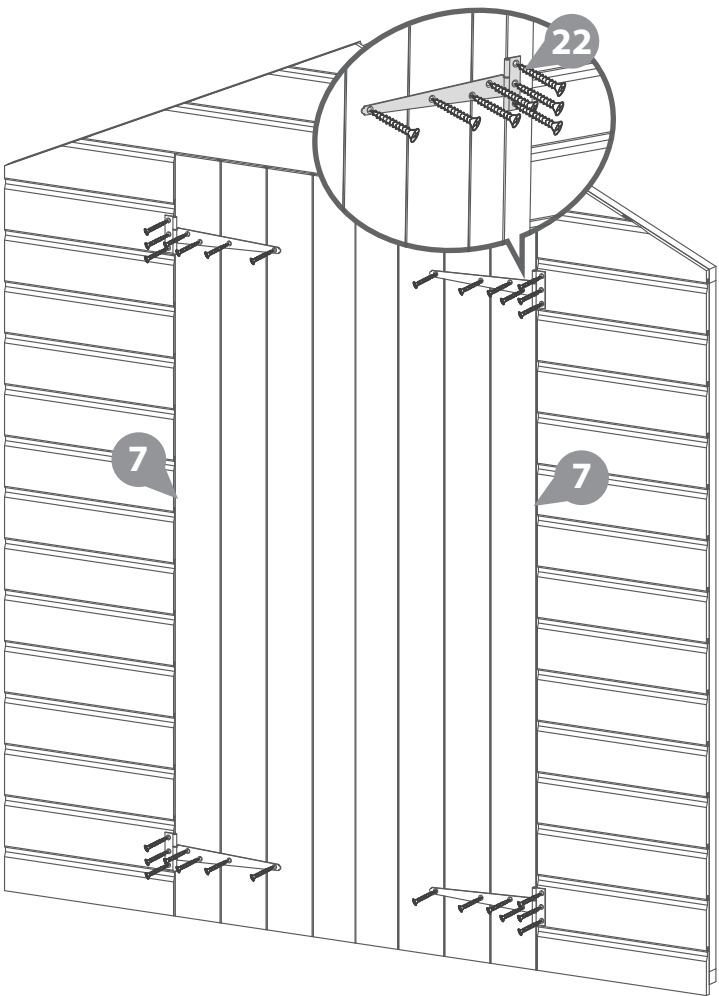


Step 1

Place floor on firm and level base, ensure base has suitable drainage free from areas where water can collect. (See front page on base requirements).

Attach the floors using 12 x 40mm screws

12x40mm screws

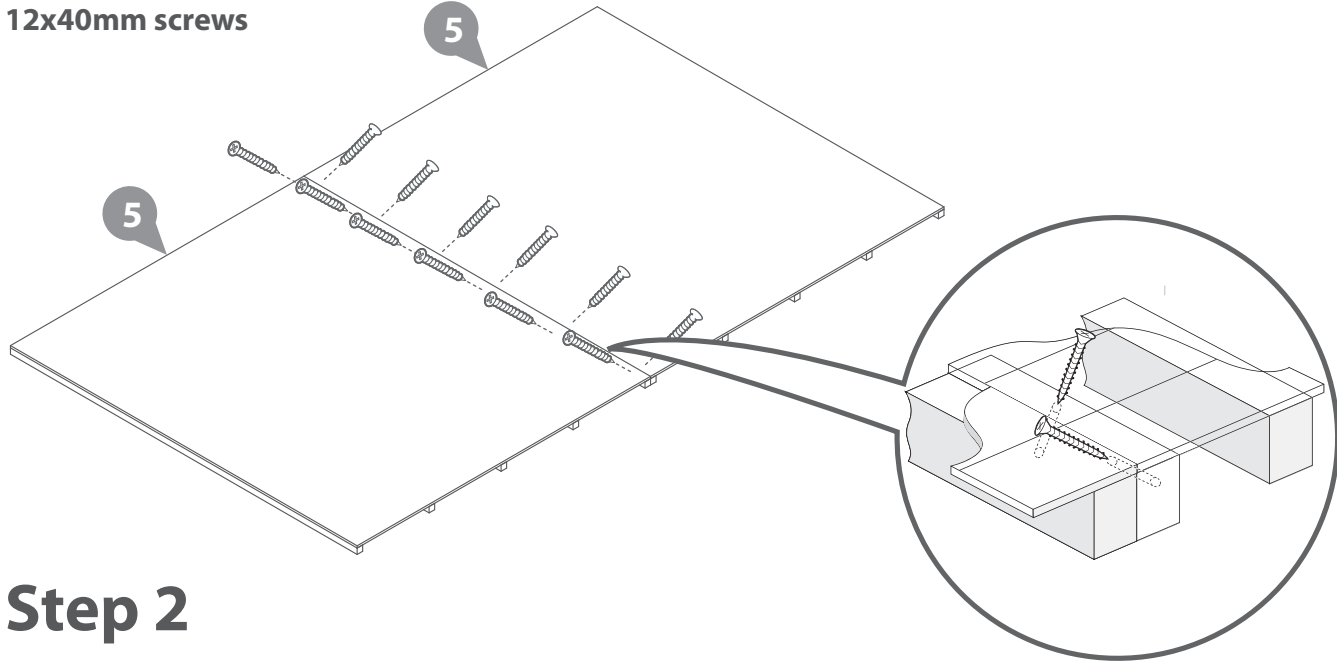



Step 2

Fix the corners with 50mm screws as shown in diagram.

Do not secure the building to the floor until the roof is fitted. Fix the panels onto the floor using 50mm screws in alignment with the floor joists

Position the panels so there is equal spacing between the floor and cladding on all 4 sides




6x50mm Screws

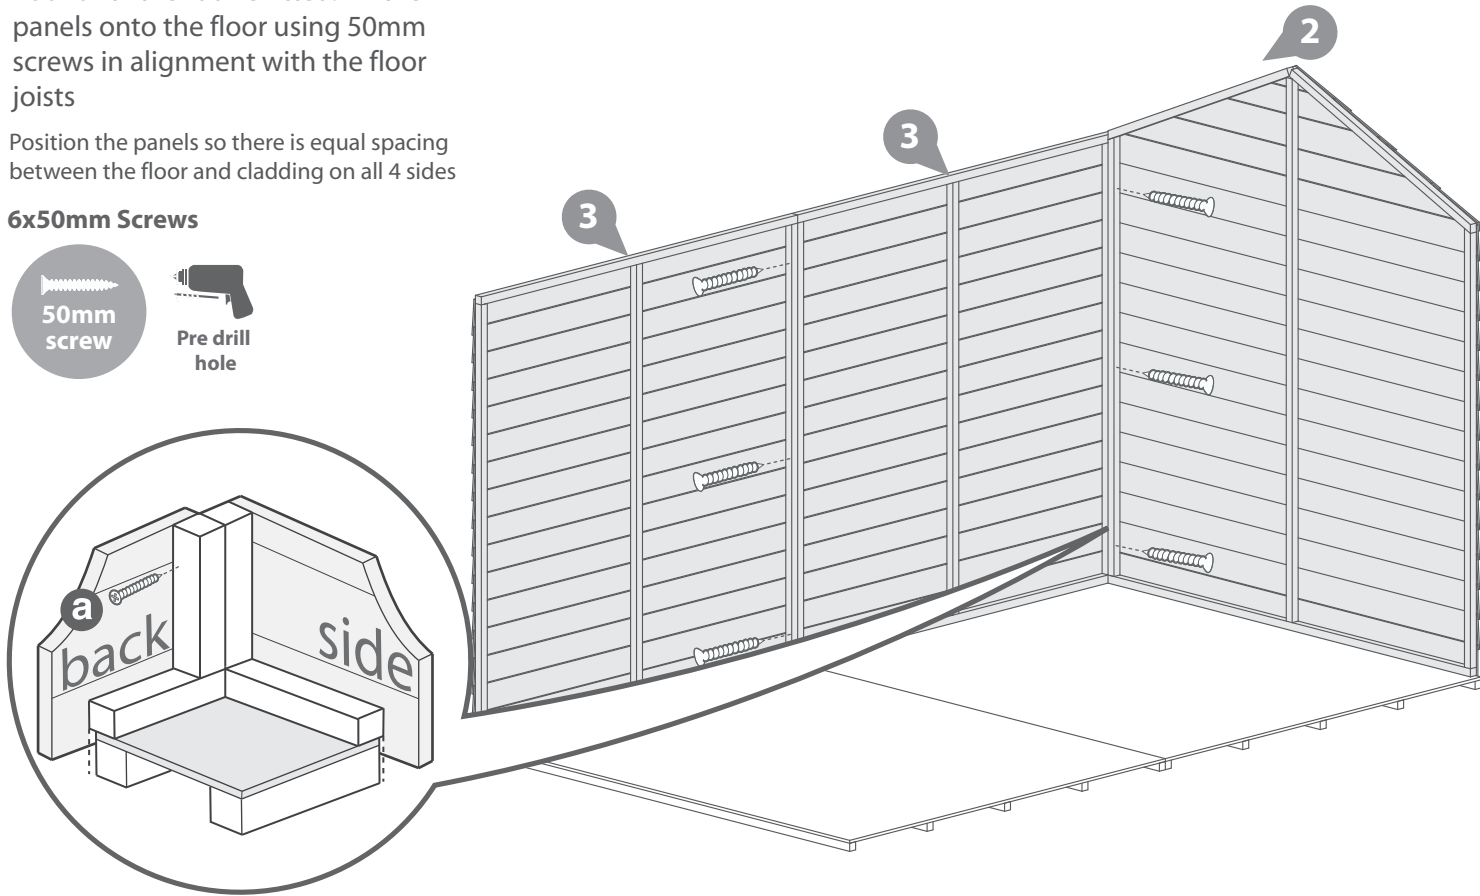

Step 3

Fix the corners with 50mm screws as shown in diagram.

12x50mm Screws

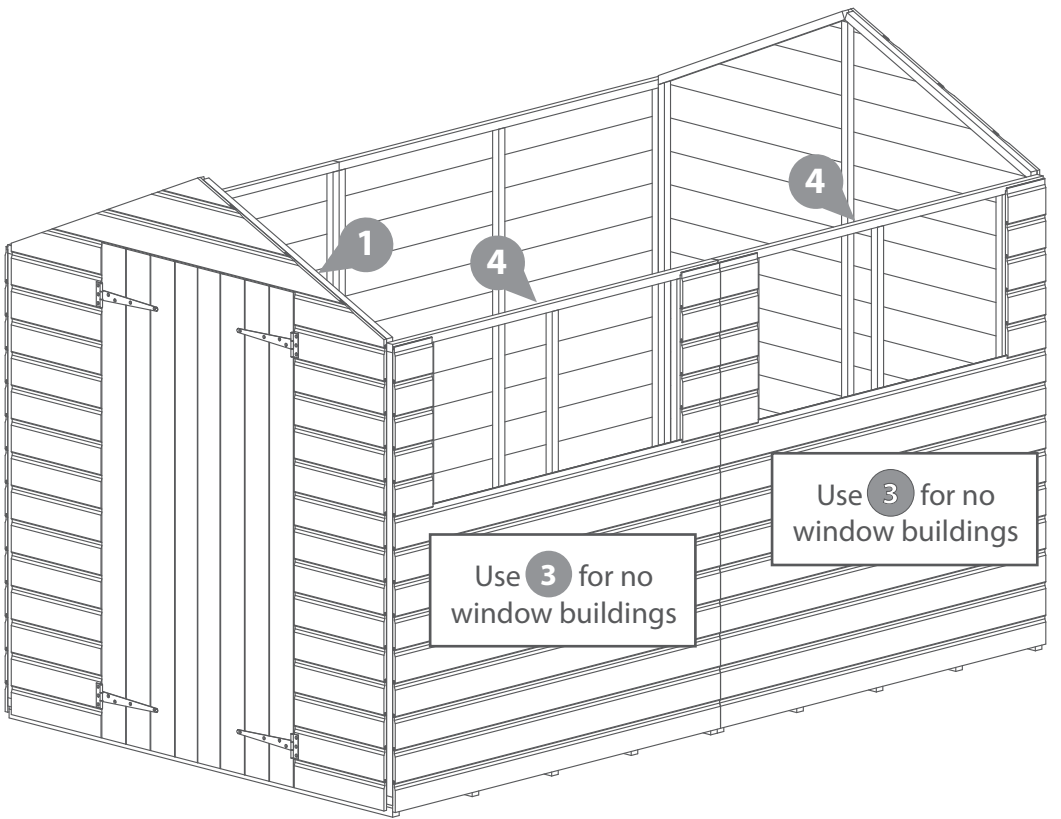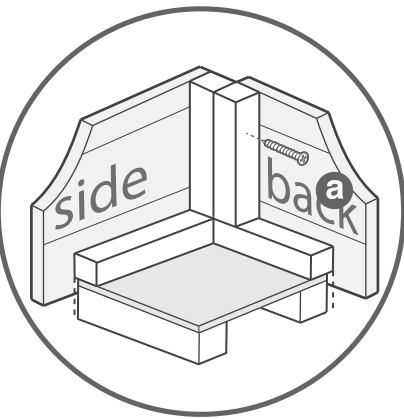



Step 4

Ridge Bar Assembly

Position the two parts of the ridge bar within the 'U' channel and secure from either side with 3 x 30mm screws and 4 x 30mm screws from underneath. Secure an 'L' bracket to either end of the ridge bar using 2 x 30mm screws per bracket.

Place the roof support bar in between the front and back panels. Ensure the top corners of the support bar are flush with each top point. Secure in place using the L Bracket on each end with 4x30mm screws.

18x30mm Screws

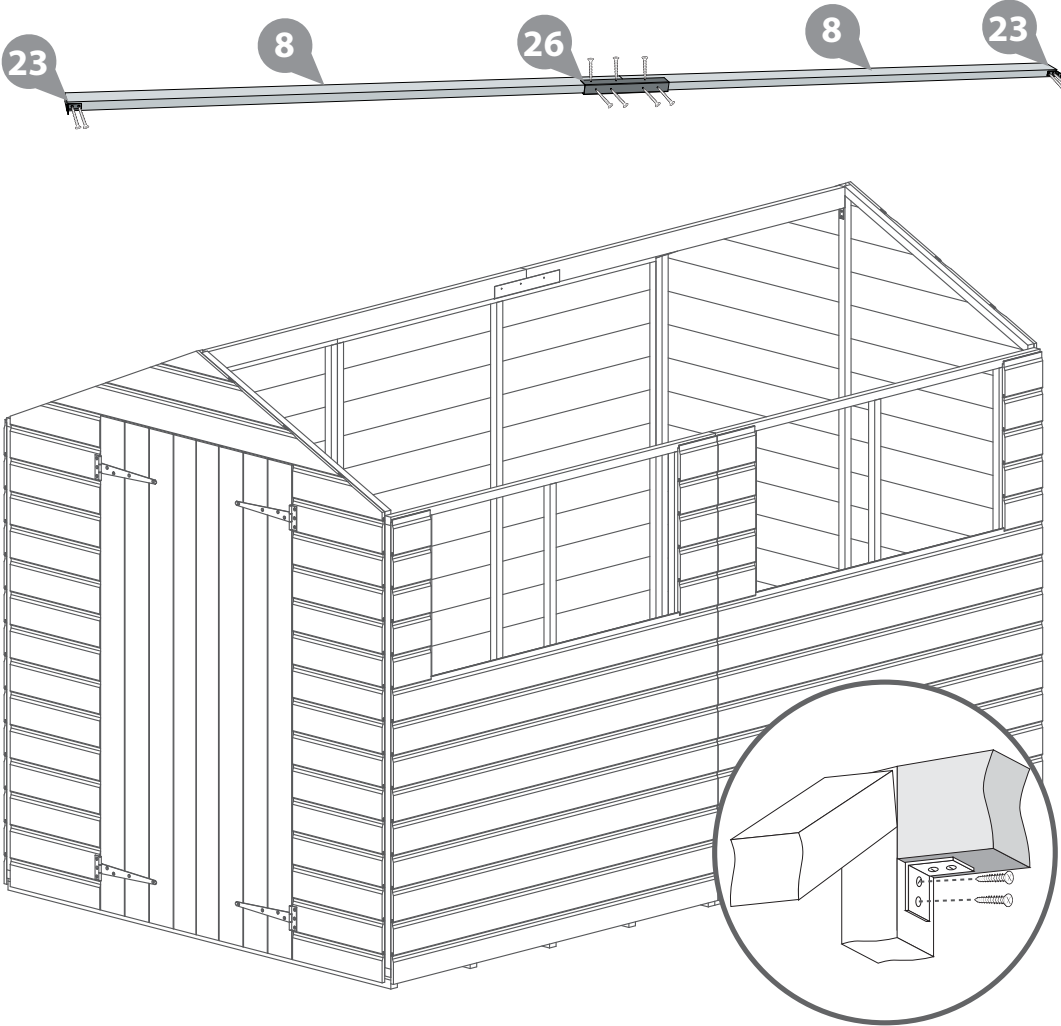


Step 5

i) Position a truss frame to the ridge bar sloping down towards the building side, ensure it is central to the middle upright of the panel. Fix with a 50mm screw through the ridge bar into the truss frame.

ii) Align the second truss frame with the first on the opposite side of the ridge bar and fix with a 50mm screw at an angle as illustrated.

4x50mm Screws

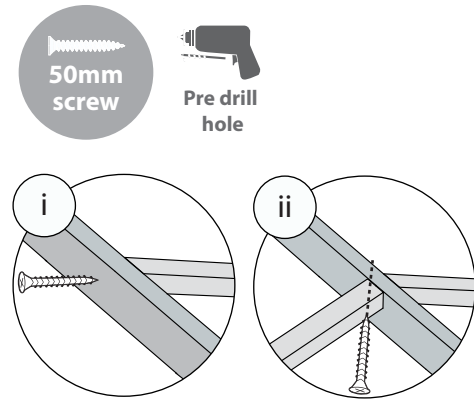


Step 6



i) Fix the truss block to the side panel framing with 2 x 50mm screws. Position the block at the top of the framing with the angle pointing upwards into the building, aligning the block centrally along the join between the side panels with one screw in each panel.

ii) Fix the support bar to the block using 1 x 50mm screw.

6x50mm Screws

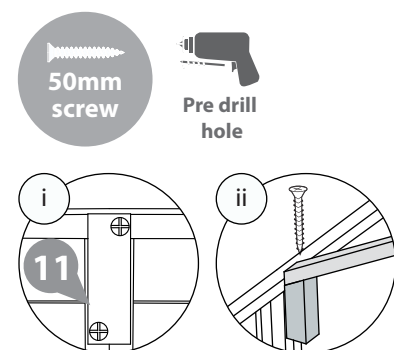


ENSURE SUPPORT BARS
ARE MANUALLY SUP-
PORTED UNTIL FIXED AT
BOTH ENDS

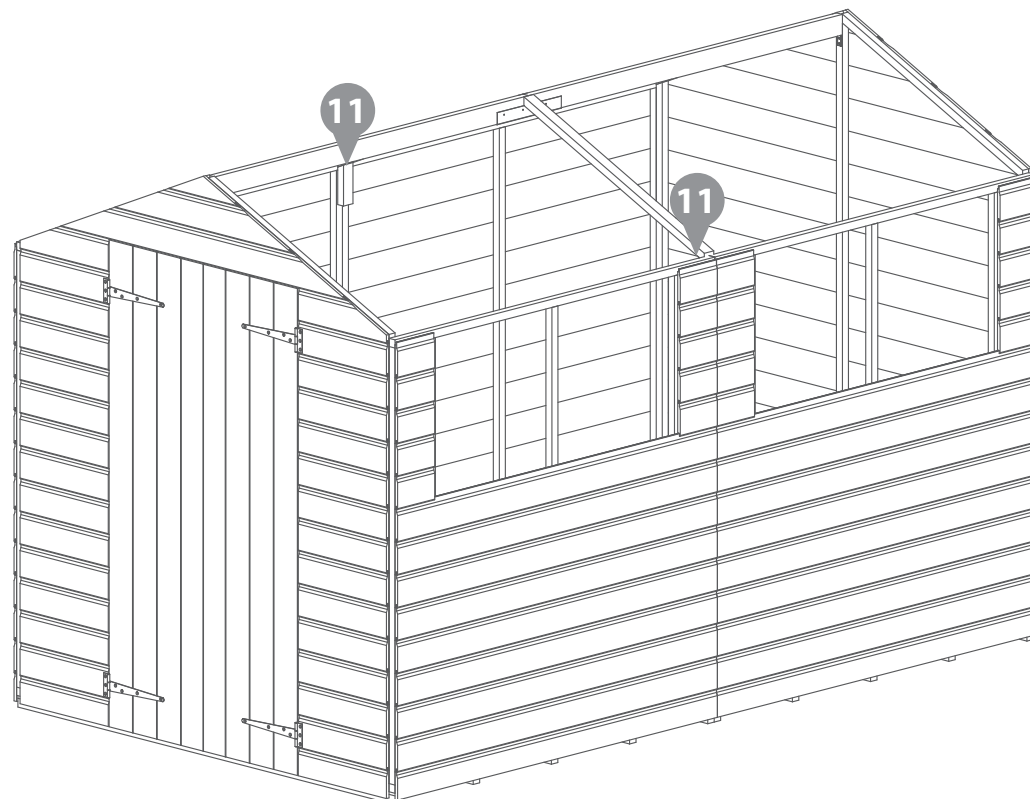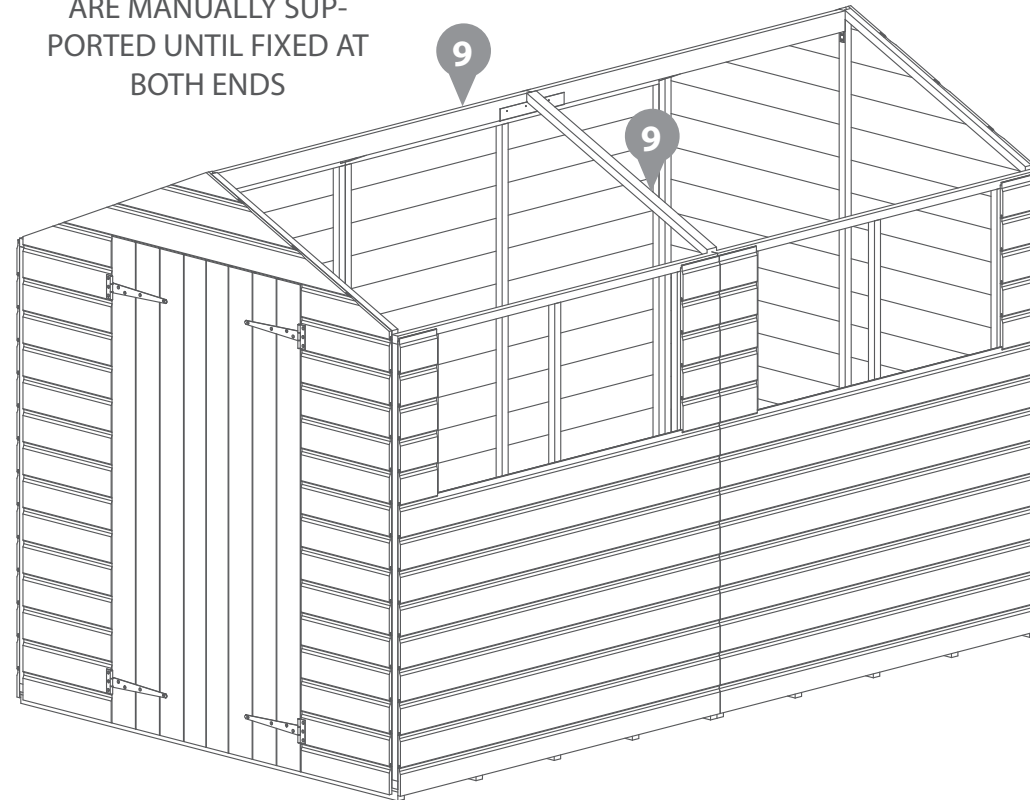

Step 7

Fix a Truss support between the two truss frames and fix in place using 40mm screws, ensure you pre-drill holes before fixing together.

4x40mm Screws

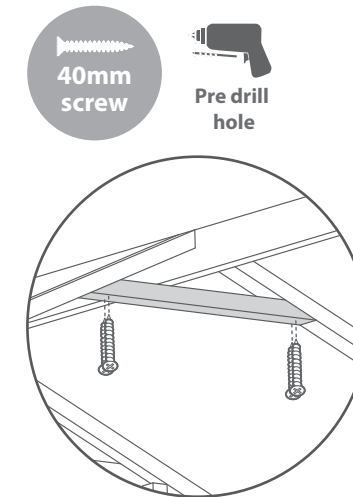


Step 8

a Fix the eaves frame to the roof sheet using 3x30mm screws for each sheet.

8x30mm Screws

b Place two roof sheets on top of the plain gable and truss. Before fixing the roof sheet to the truss frame make sure the edge of the roof sheet sits in the middle of the truss frame then fix using 40mm screws.



32x40mm Screws

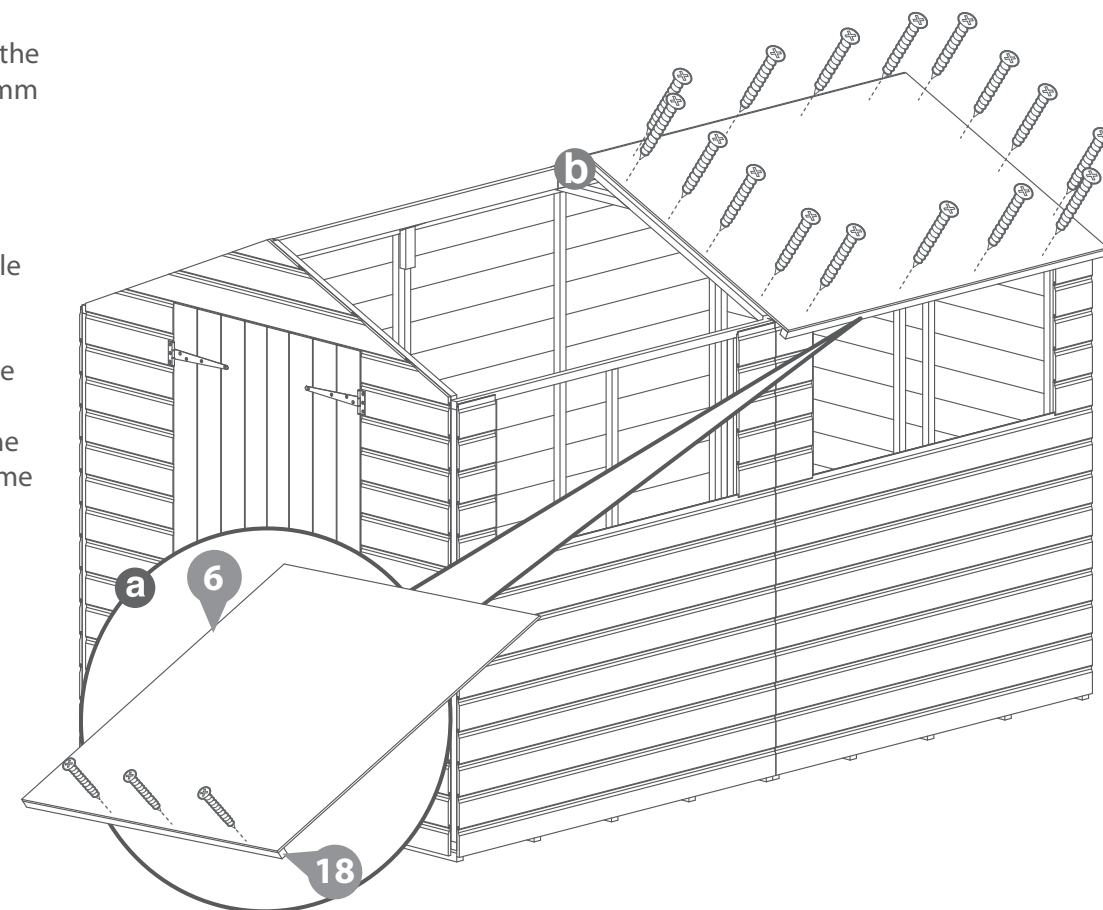

Step 9

- a** Fix the eaves frame to the roof sheet using 3x30mm screws for each sheet.
- b** Place two roof sheets ontop of the plain gable and truss. Before fixing the roof sheet to the truss frame make sure the edge of the roof sheet sits in the middle of the truss frame then fix using 40mm screws.




8x30mm Screws

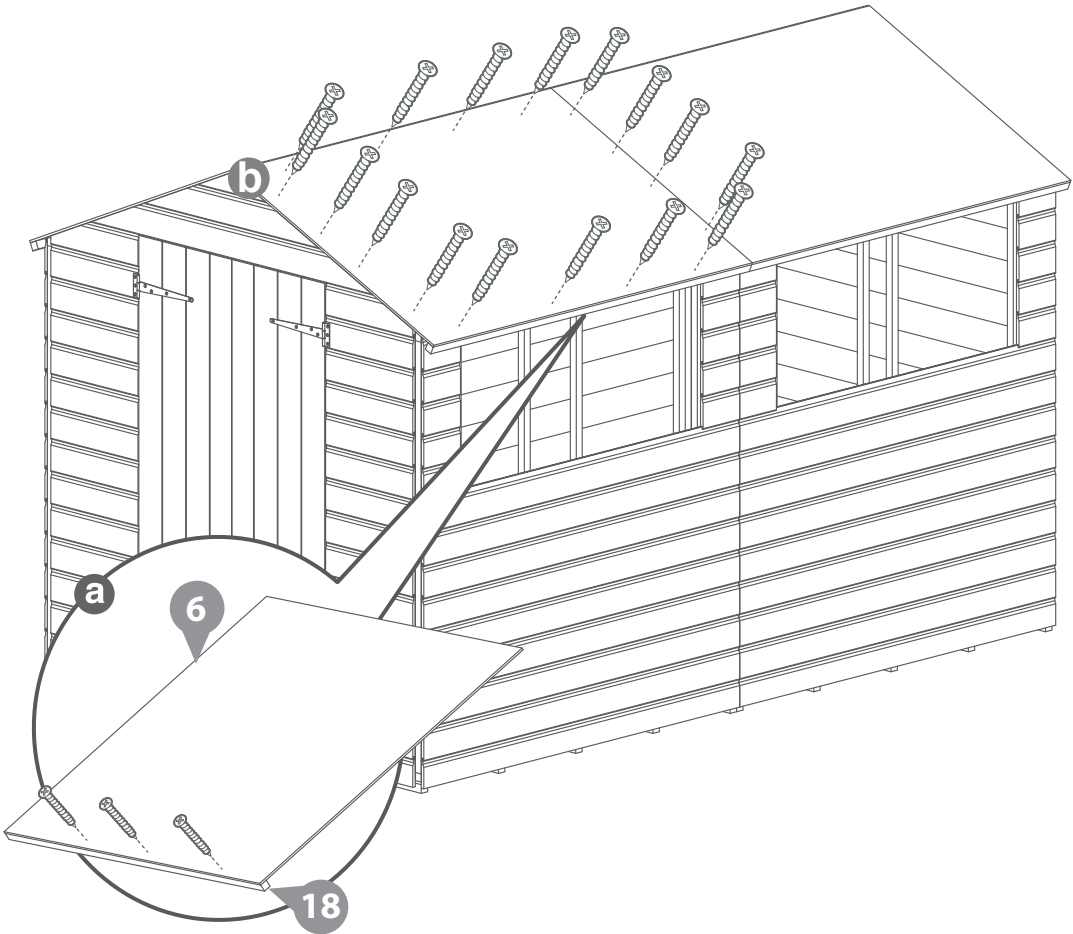

Step 10

Once the roof is fixed attatch the building to the floor with 70 mm screws.

24 x 70mm Screws

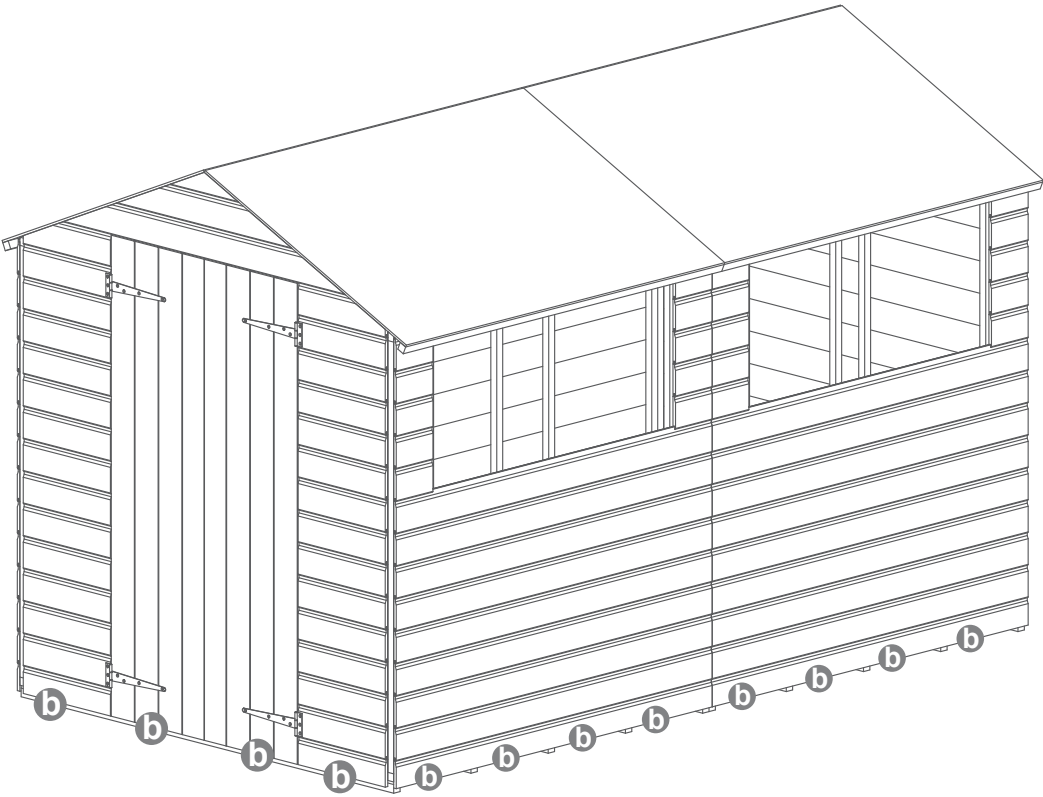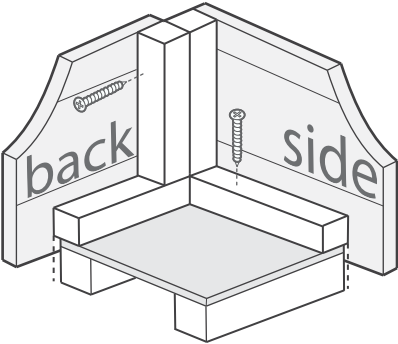





Step 11

Cut out three strips of 3104mm felt and place onto the roof.


Place the felt flat onto the roof in the order that is stated on the diagram below.

Once the sheets are laid out fix them onto the roof with tacks 100mm apart.

120 x Tacks

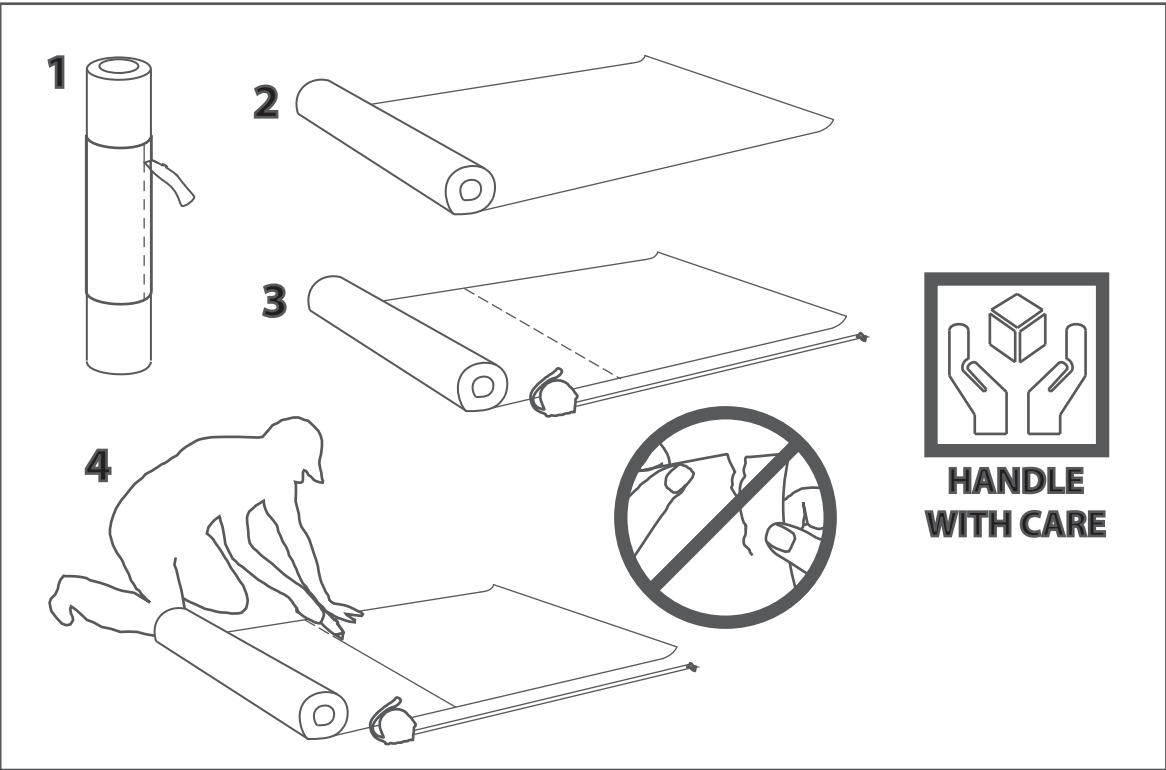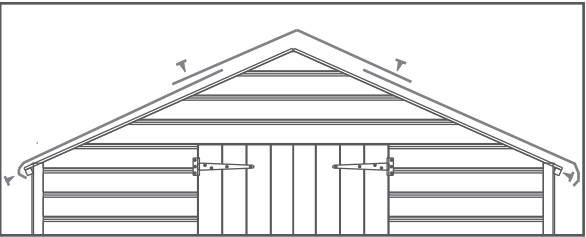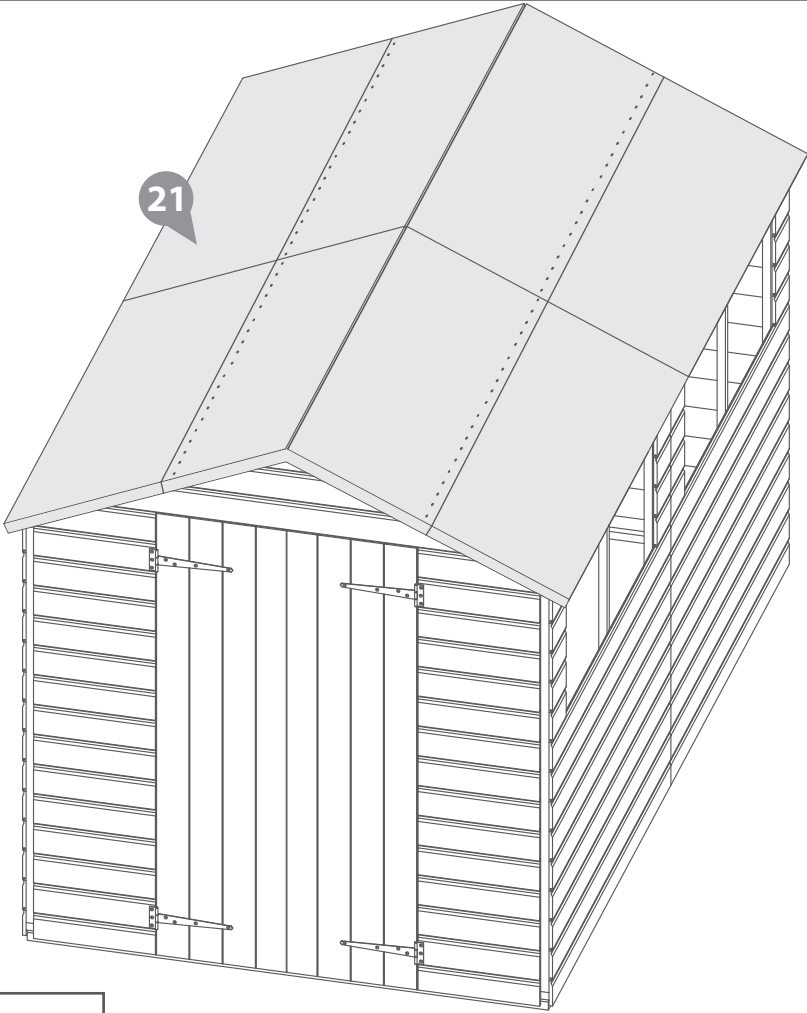


Step 12

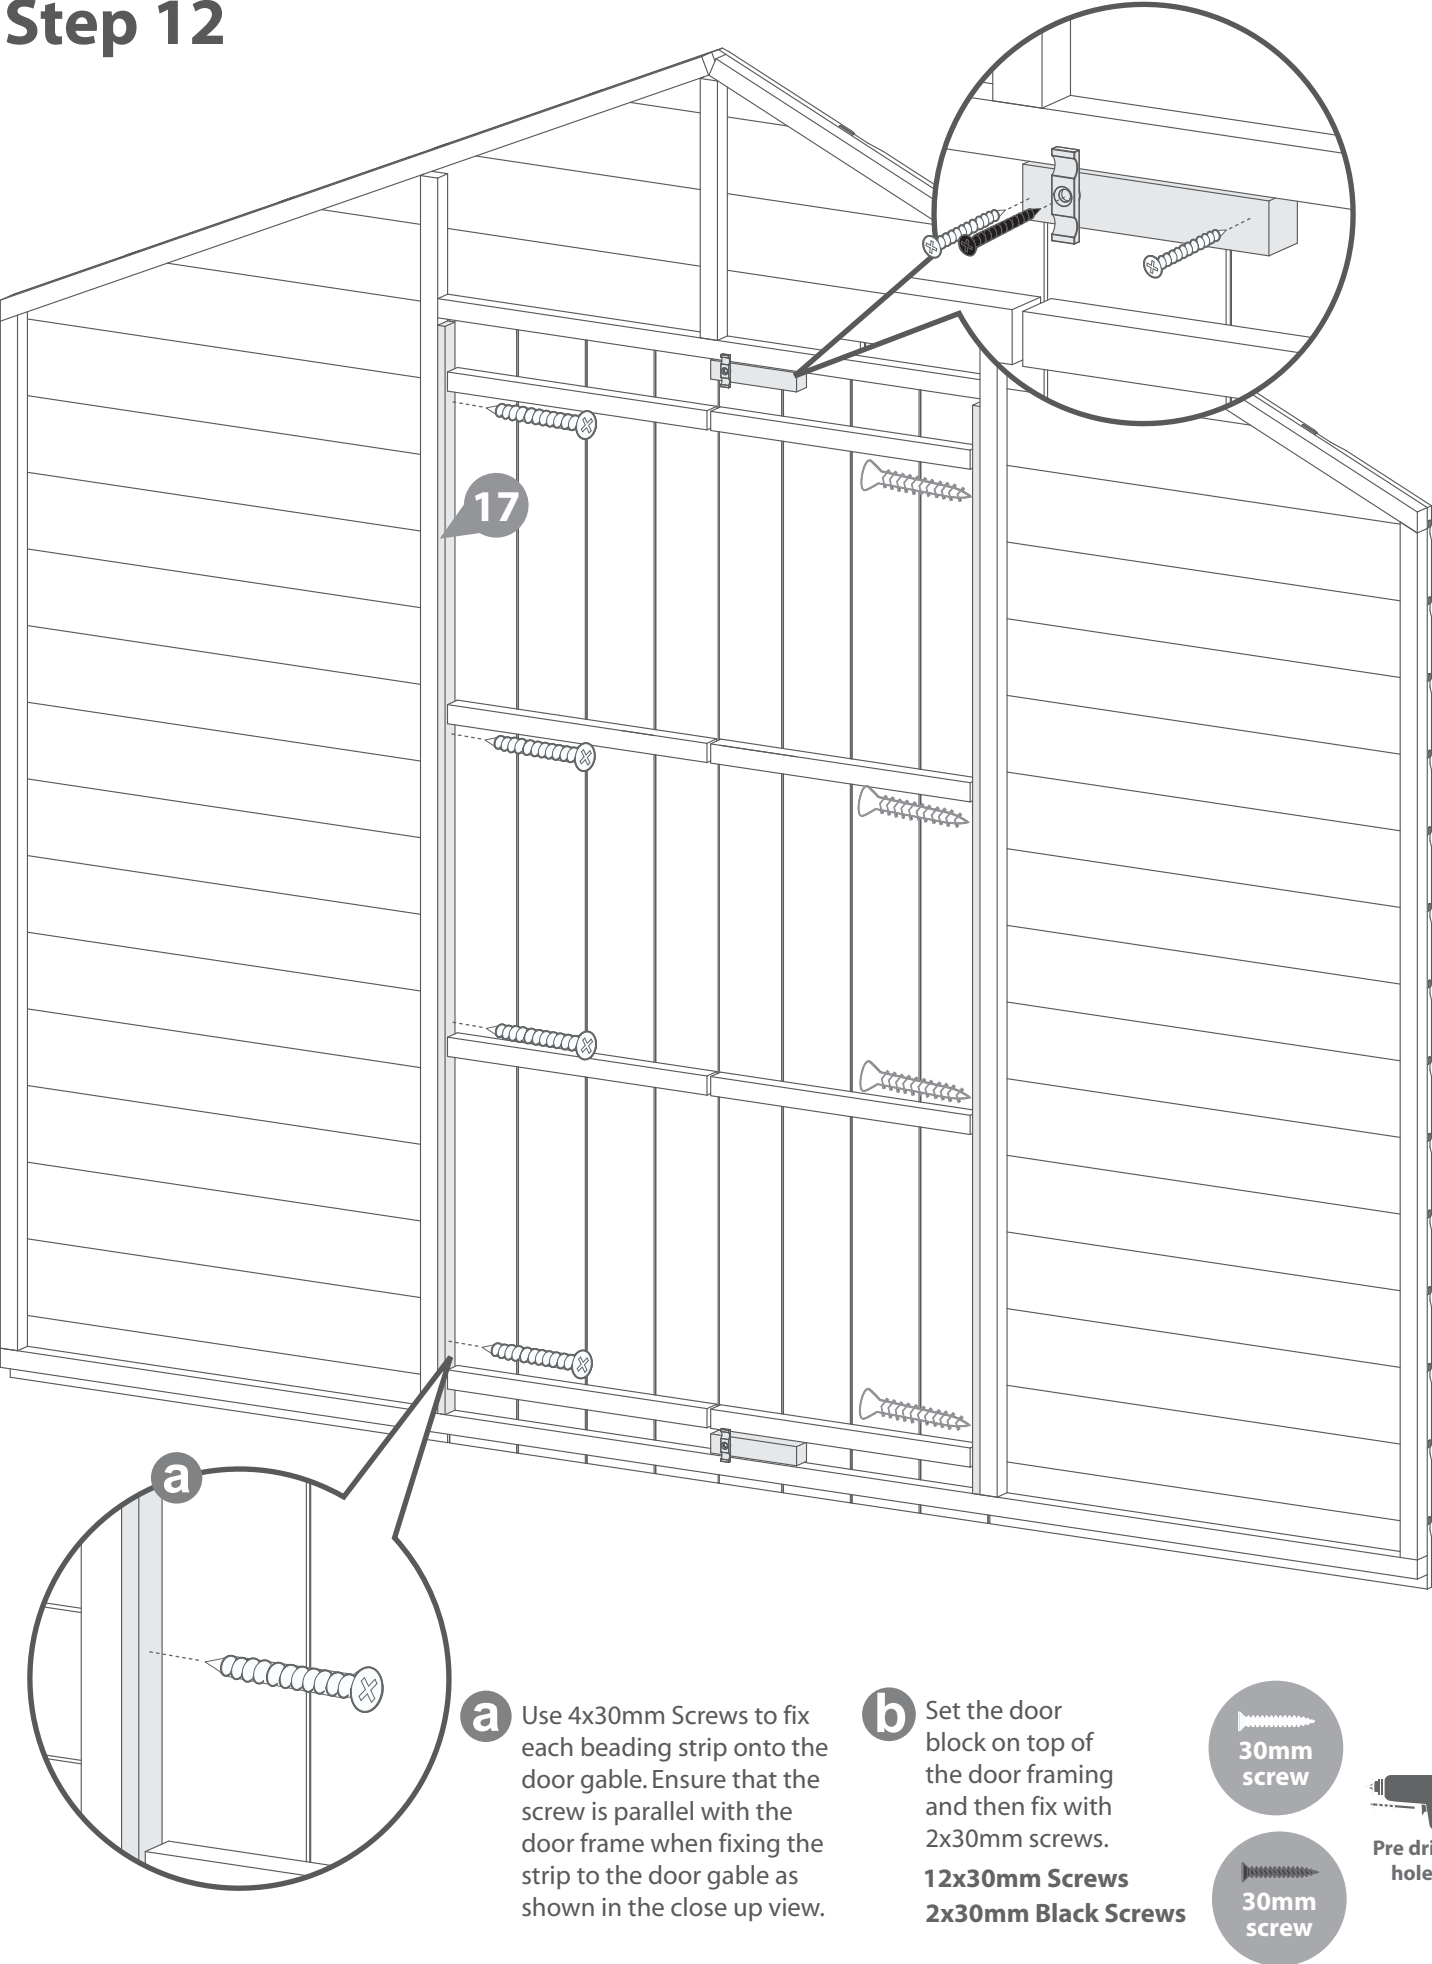

Step 13

Fit the cover trims to the building and secure in place with 40mm screws as shown. Pre drill to avoid splitting.

18x40mm Screws

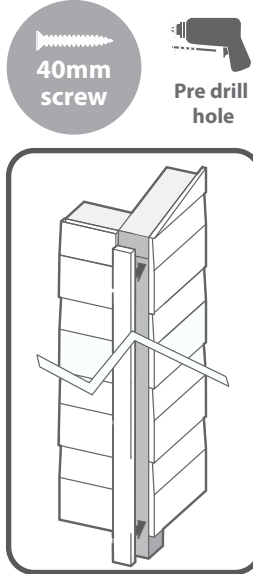



Step 14

Attatch faisca's to the roof leaving a slight overhang at the top.

Fit the fascias to the roof over the felt and secure in place with 40mm screws as shown.

Pre drill to avoid splitting.

16x40mm Screws

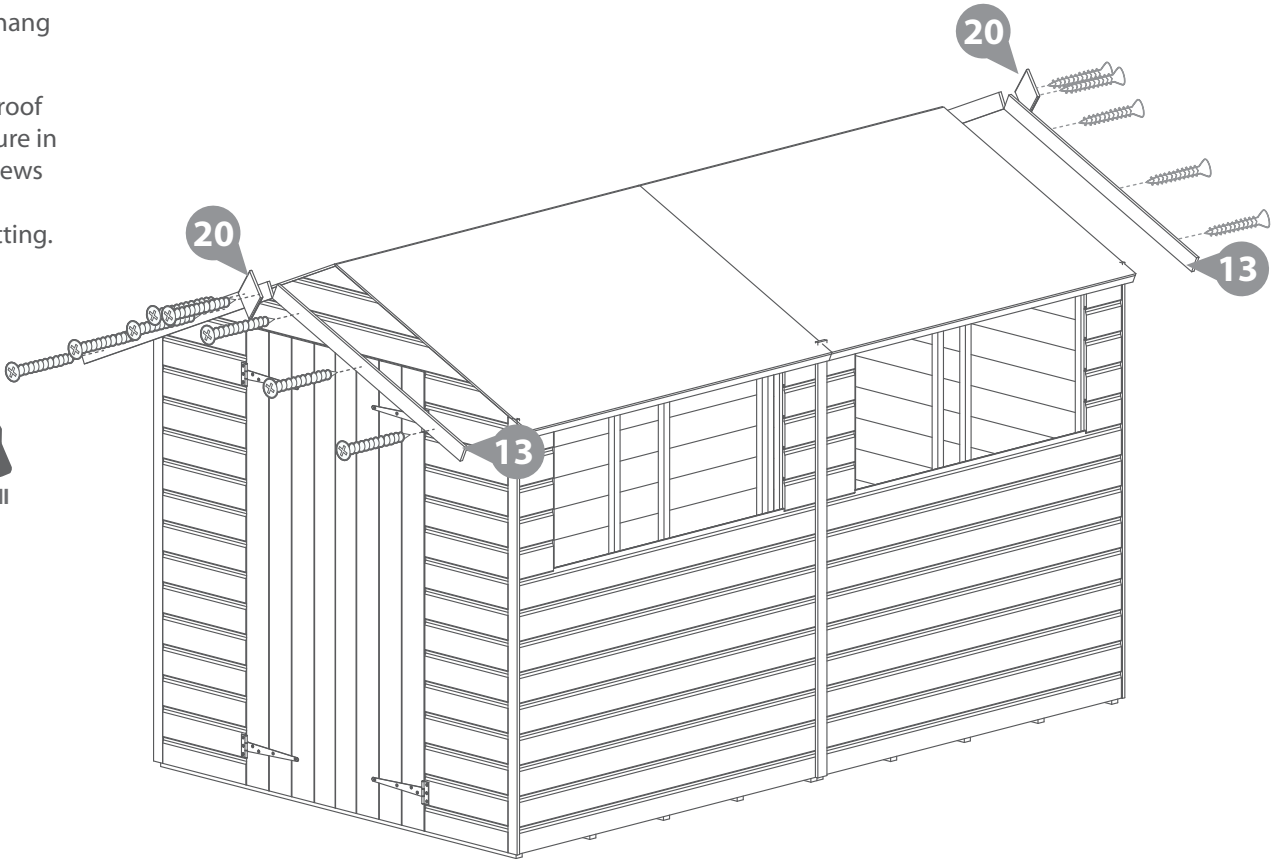



Step 15

- a** Fix the door strips to the master door using 5x30mm screws.
If the strips are attached to the slave door the doors will not open properly.
- b** Use 1x30mm screw to secure the turn button to the master door.





5x30mm Screws

1x30mm Black Screws

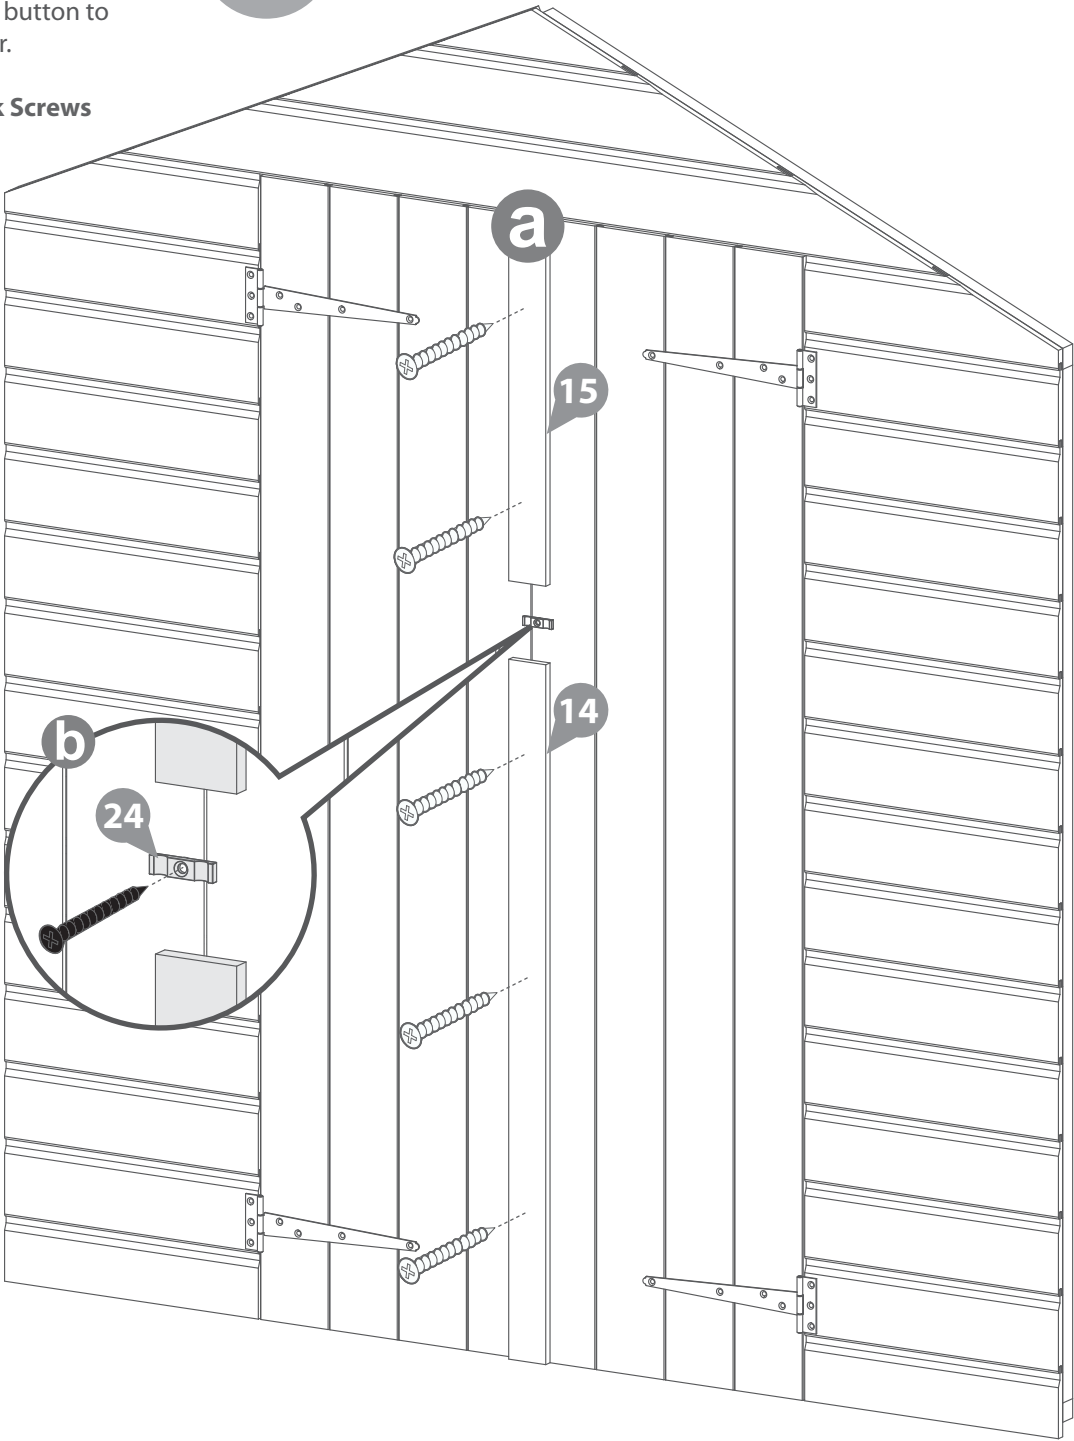

Step 16

For the no window version go to step 11

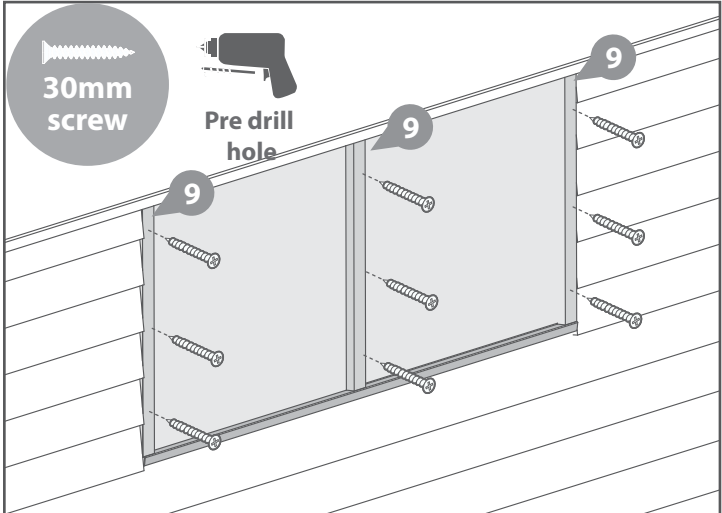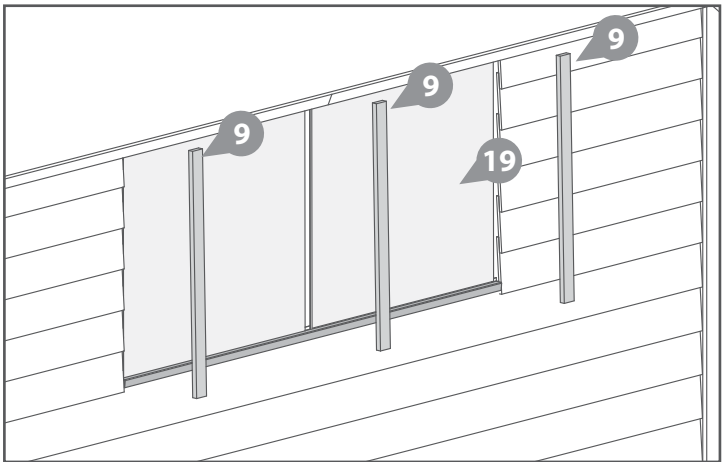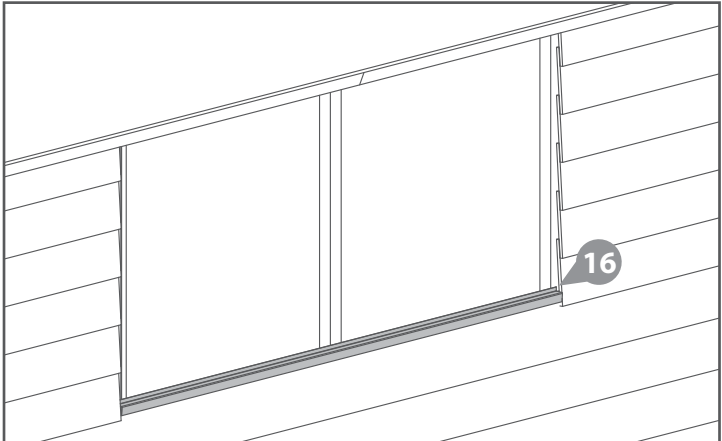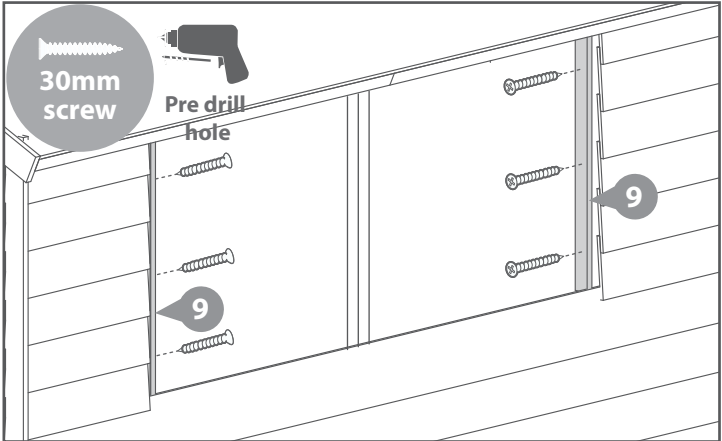

Fix the window strips to the two pieces of framing that sit alongside the outside edges of the window with 3x30mm screws for each strip.

6x30mm Screws

Side View

Place the plastic window cill onto the Window Panel in the same way as shown on both diagrams to the left.

Fit the styrene sheets on top of the window cill.

When positioning the styrene sheets ensure there is an equal distance between them and at either side of the windows.

Attach the three window strips at either side of the windows using 3x30mm screws each. Make sure the screws enter the framing in the window panel and not the styrene.

9x30mm Screws

