

New Hallingford -3 Door Sliding Robe

Assembly Instructions Please keep for future reference


2687249

2274463

2572048

2285665

2666387

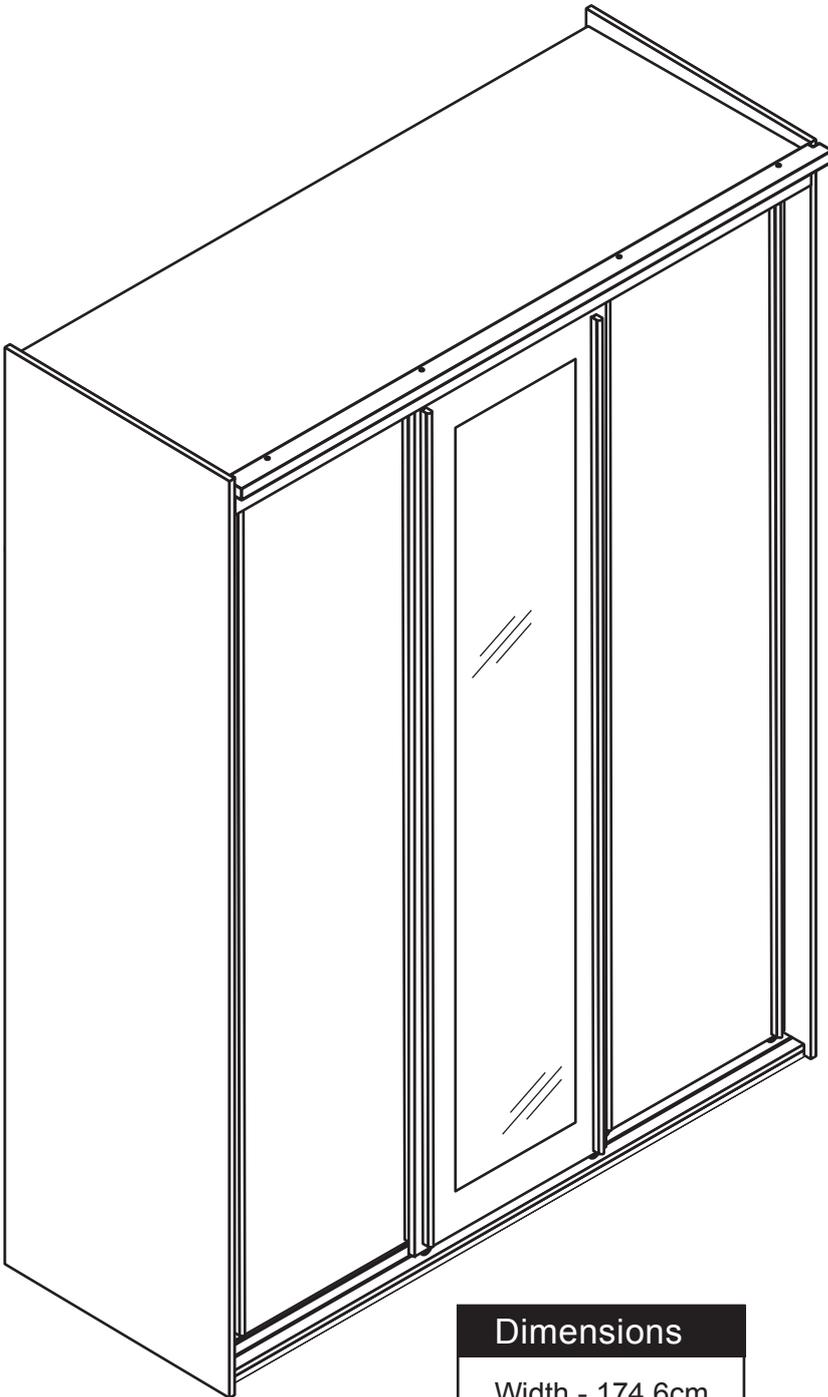

Dimensions

Width - 174,6cm

Depth - 60,3cm

Height -205,7cm

Tip : To prevent damage, we recommend that you build your unit on the carton(s) it was packed in.

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit: www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: **0370 112 1928**

For any other queries please contact the Customer Helpline on: **0345 640 2020**



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



• To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Instruction video



• This manual is provided with an additional instruction video. If the icon on the right is displayed at a particular step in the manual, Follow the link: <http://nlink.nu/homeretail1>
Or scan the QR code on the left with your phone.




See page 2 for link to instruction video!

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

For damaged or missing parts, please visit:
www.argos-support.co.uk or email: Help@ClickSpares.co.uk

Please check you have all the panels listed below

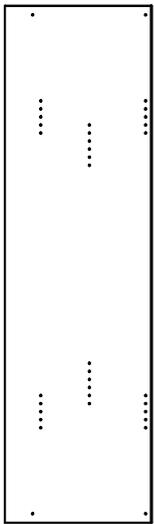


1 Left side
 (205.6 x 58cm)
P2350




2 Right side
 (205.6 x 58cm)
P2350




3 Upright
 (196.9 x 46.9cm)
P2351

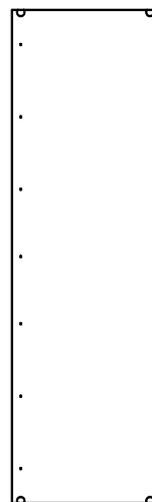


4 Slide door x2
 (196.3 x 58cm)
P3721




5 Shelf
 (56 x 46.7cm)
P1347

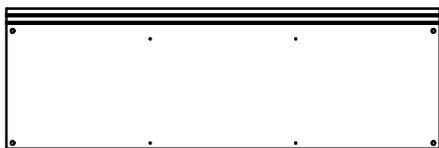


6 Top
 (171 x 55.7cm)
P1344

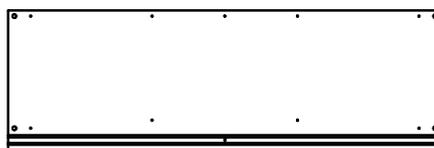


7 Bottom
 (171 x 55.7cm)
P1345

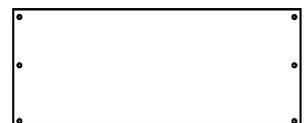


8 Large horizontal
 (113.4 x 46.7cm)
P1485

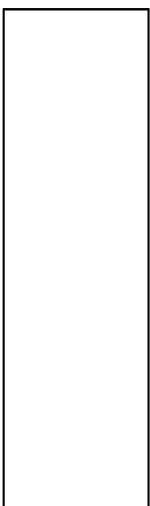


9 Back
 (199.3 x 57.4cm)
BO33924

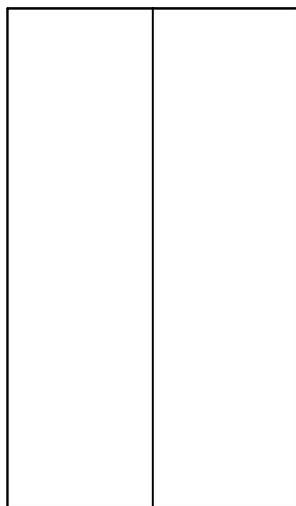

10 Foldy back
 (199.3 x 114.7cm)
BO33923

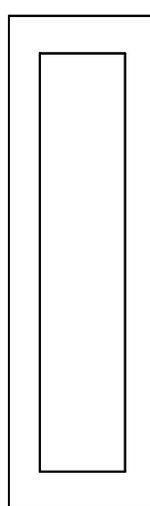

11 Mirror slide door
 (196.3 x 58cm)
PS3720



12 Plinth front
 (170.9 x 14cm)
P7340C



13 Plinth back
 (170.9 x 5.4cm)
P7341C



14 Plinth top
 (171 x 7cm)
P7294



15 Pelmet
 (174.8 x 6.5cm)
FA246
















Components - Fittings

For damaged or missing parts, please visit:
www.argos-support.co.uk or email: Help@ClickSpares.co.uk







Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


Door-fittings

D  <small>FK1400</small> Backpanelscrew x 19 (4x15mm)	E  <small>FK1318</small> Screw x 28 (3.9x32mm)	J  <small>FK1274</small> Sliding door roller adjustable x 2
K  <small>FK1273</small> Sliding door guide x 6	L  <small>FK1272</small> Sliding door roller x 4	Q  <small>FK1416</small> Felt x 6
Fittings Carcase		
A  <small>FK1324</small> Chipboardscrew x 10 (4x40mm)	B  <small>FK1051</small> Expando housing x 3 (20x12mm)	C  <small>FK1056</small> Expanding dowel x 3 (5x8.5mm)
G  <small>FK1235</small> L-Bracket x 1	H  <small>FK1011</small> Twister leg x 18 (5x24mm)	I  <small>FK1012</small> Twister cam x 18 (15x12mm)
F  <small>FK1309</small> Pozi screw x 4 (4x12.5mm)	M  <small>FK1217</small> Hanger rail support x 4	
N  <small>FK1207</small> Shelf support x 4	O  <small>FK1311</small> Chipboardscrew x 4 (3x15mm)	P  <small>FA1515</small> Nail x 60
R  <small>FK1417</small> Doorstop x 5	S  <small>FK1234</small> Peg x 4	T  <small>PR1964</small> Handle moulding x 4 (1904mm)
V  <small>PM1882</small> Hanger rail x 1 (1126mm)	U  <small>PM1883</small> Hanger rail x 1 (552mm)	W  <small>PK1653</small> Sliding rail x 4 (1708mm)
		X  <small>ZF99936</small> Wall plug and parkerscrew x 1

Tools required

	Phillips screwdriver (medium & large)		Drill		Stairs		Small hammer
	Flatblade screwdriver (medium)						Ruler/tape measure
	Piercer (small)				spirit level		Scissors
	5mm Suitable drill bit						
	2.5mm Suitable drill bit		Setsquare				Eye protection (when using a hammer or drill)

Ruler- Use this ruler to help correctly identify the screws

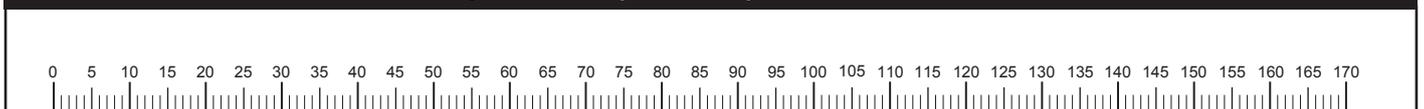

Assembly Instructions

Step 1

Insert fittings

a: Attach hanger rail support **M** using 12.5mm screw **F** onto upright **3**.




Put shelf supports **N** into upright **3** where shown.

Flip panel

b: Attach hanger rail support **M** using 12.5mm screw **F** onto upright **3**.

Screw locking screw **H** into upright **3**.

Note: locking screw **H** as far as shown.
Do not over tighten.

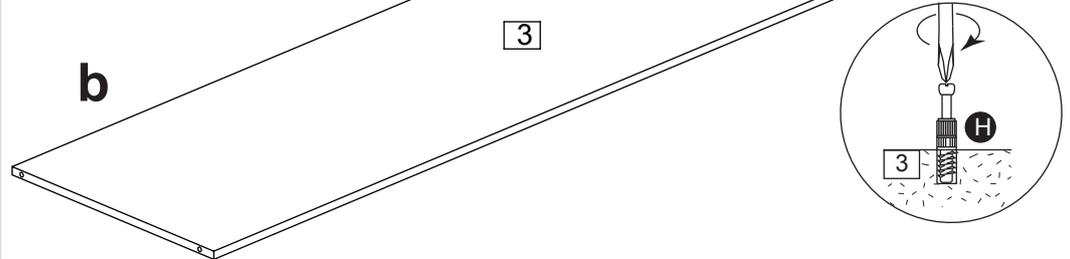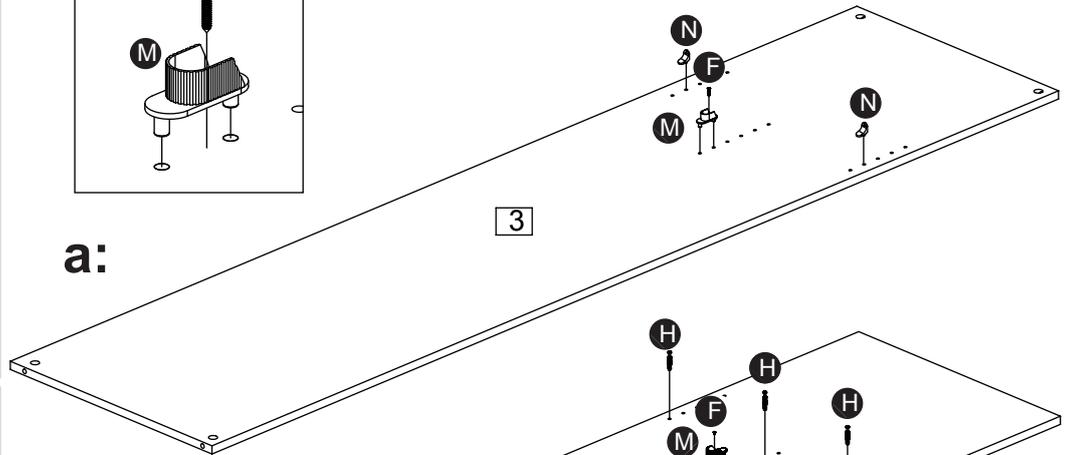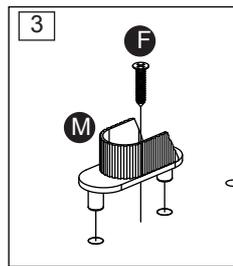




Step 2

Attaching panel


Position large horizontal onto upright **3**.

Insert twister cams **1** into large horizontal **8** where shown.


Use a screwdriver to turn twister cams **1** clockwise to lock.

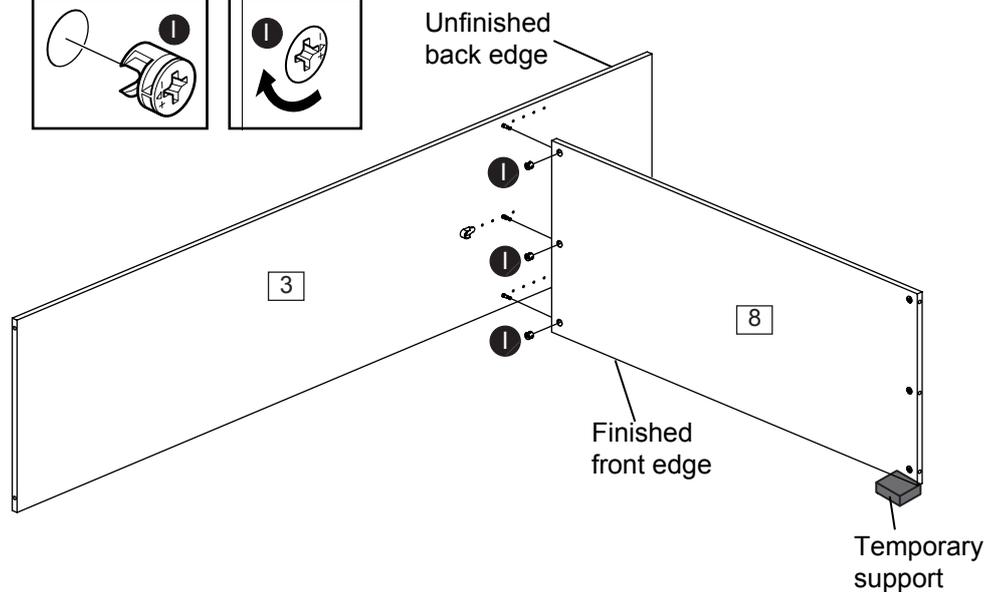


Locate the 'mating' panel over the Cam Leg.




Insert the Cam so the longer 'slot' is pointing towards the Cam Leg.



Use a Flat Bladed Screwdriver to turn Cam clockwise as far as it will go



The final 'locked' position will be more than half a turn.



Assembly Instructions

Step 3

Insert fittings




a: Insert expando housings **B** into top **6** .

Flip panel

b: Carefully knock sliding rail **W** into top **6** by using a hammer.

c: Insert locking screw **H** into top **6** .

*Repeat b and c for bottom **7** .*

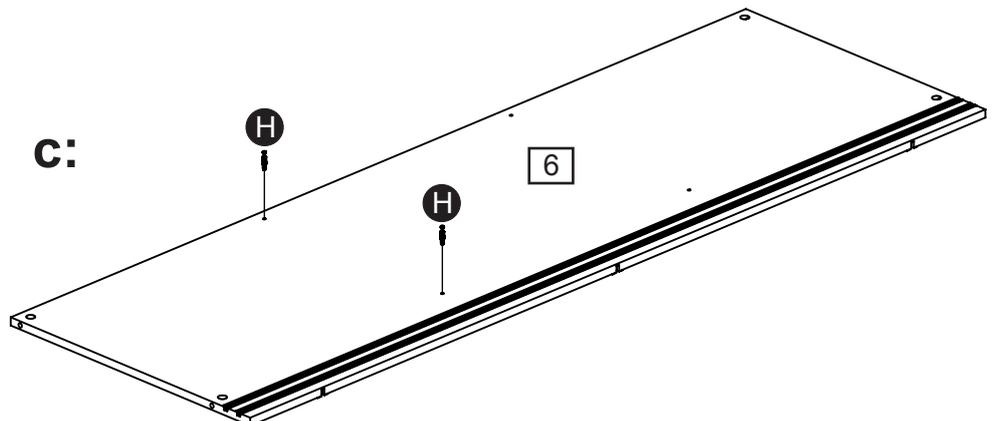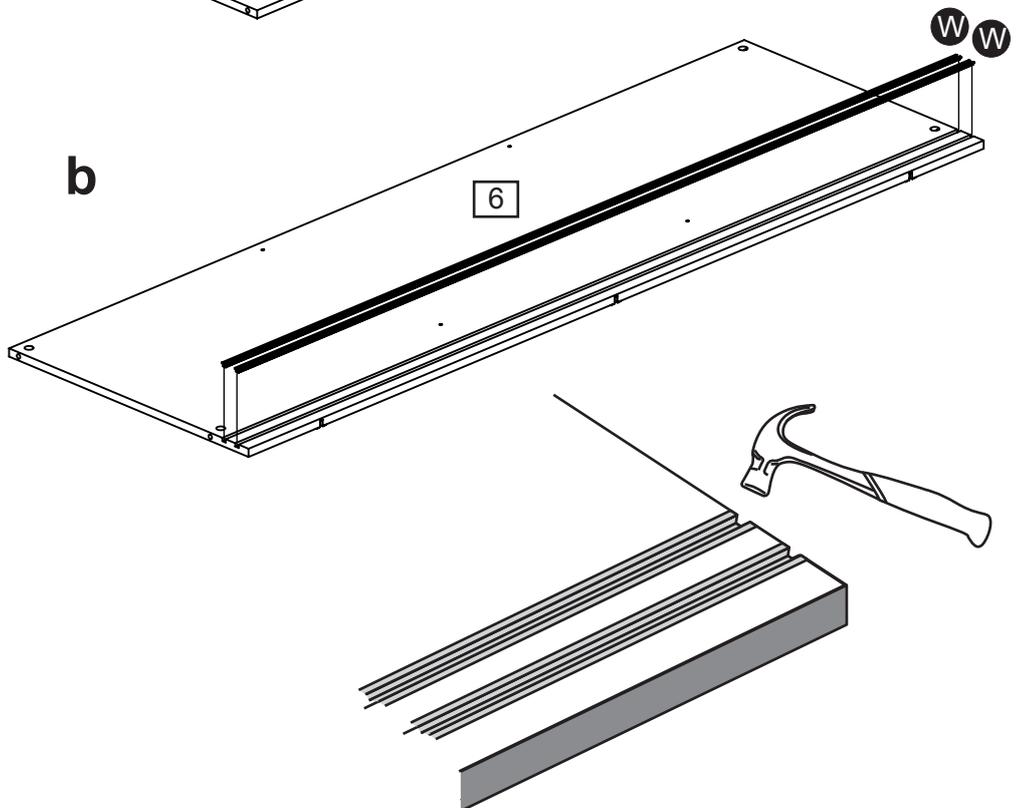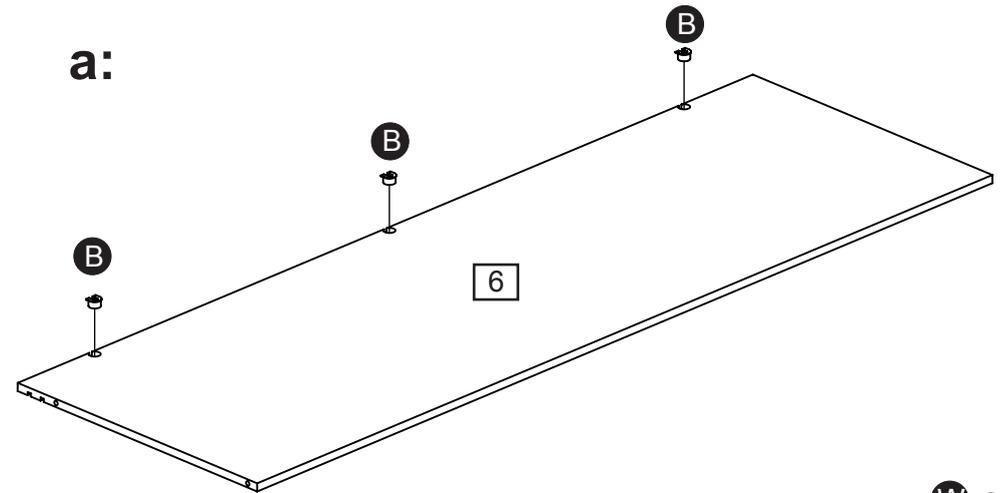

Assembly Instructions


Step 4

Attaching panel

Position top **6** onto upright **3**.

Insert twister cam **1** into upright **3** where shown.

Use a screwdriver to turn twister cam **1** clockwise to lock.

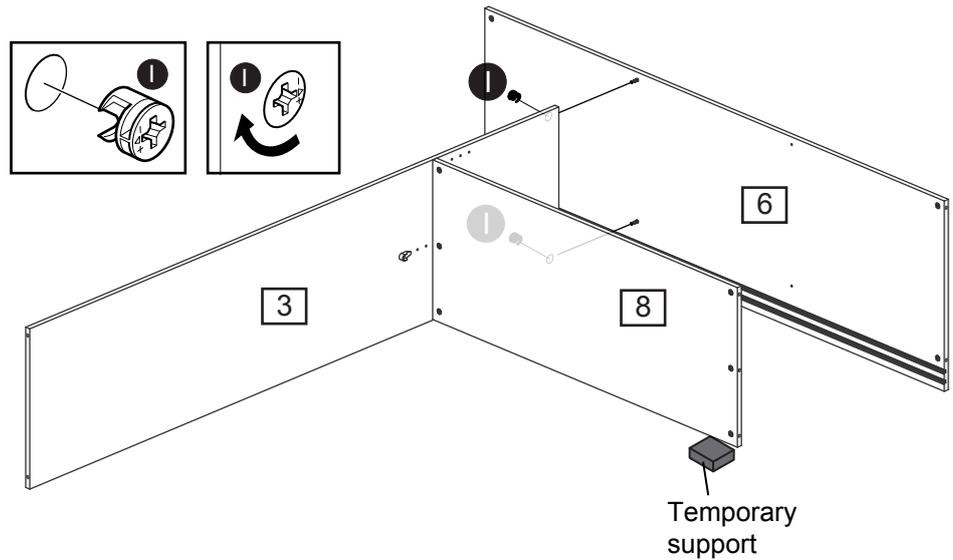


Step 5

Attaching plinths

Align the sides of plinth front **12** with bottom **7** as shown and attach using chipboardscrew **A**.

Note: there are no predrilled holes for 40mm screws **A**.

Repeat with plinth back **13**.

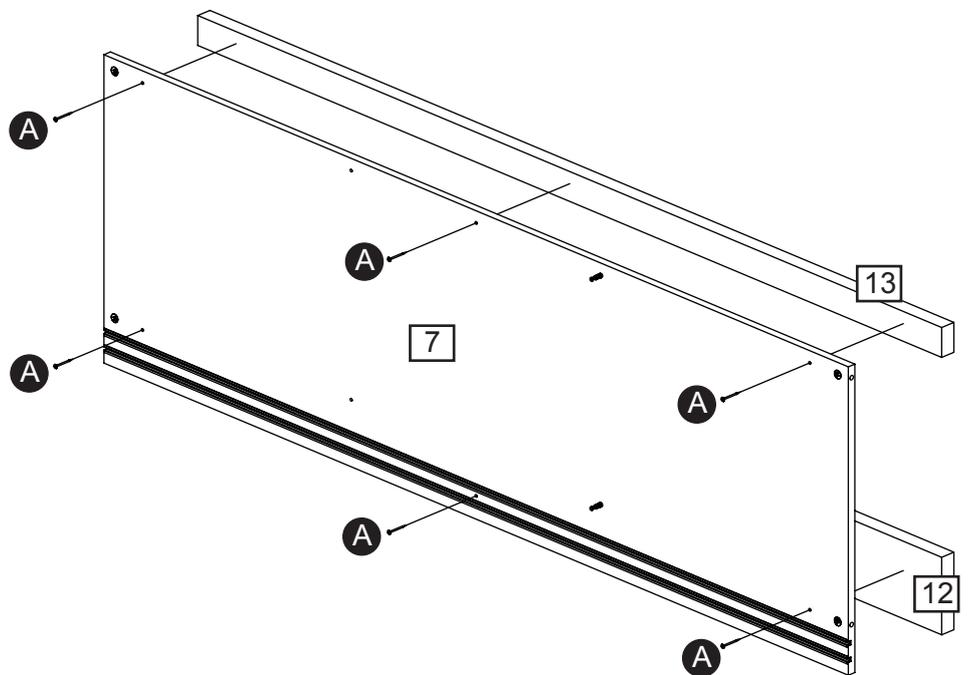


Step 6

Attaching panel

Position bottom **7** onto upright **3**.

Insert twister cam **1** into upright **3** where shown.

Use a screwdriver to turn twister cam **1** clockwise to lock.

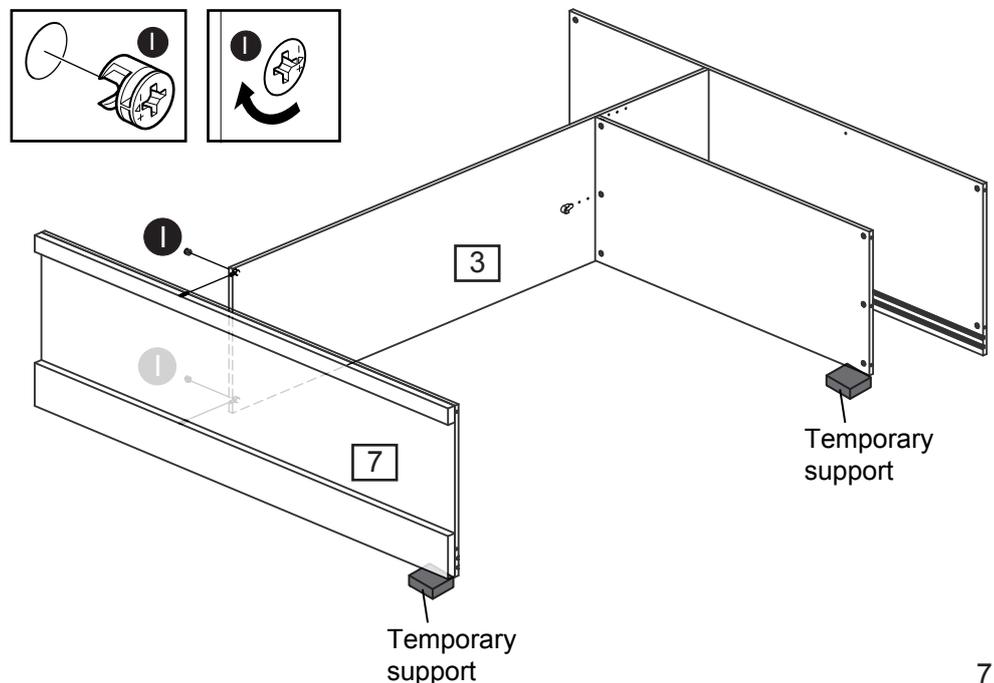

Assembly Instructions

Step 7


Insert fittings

Screw locking screw **H** into right side **2** where shown.

Note: Insert locking screw **H** as far as shown. **Do not overtighten.**

Attach hanger rail support **M** using pozi screw **F** onto right side.

Insert shelf supports **N** where shown.

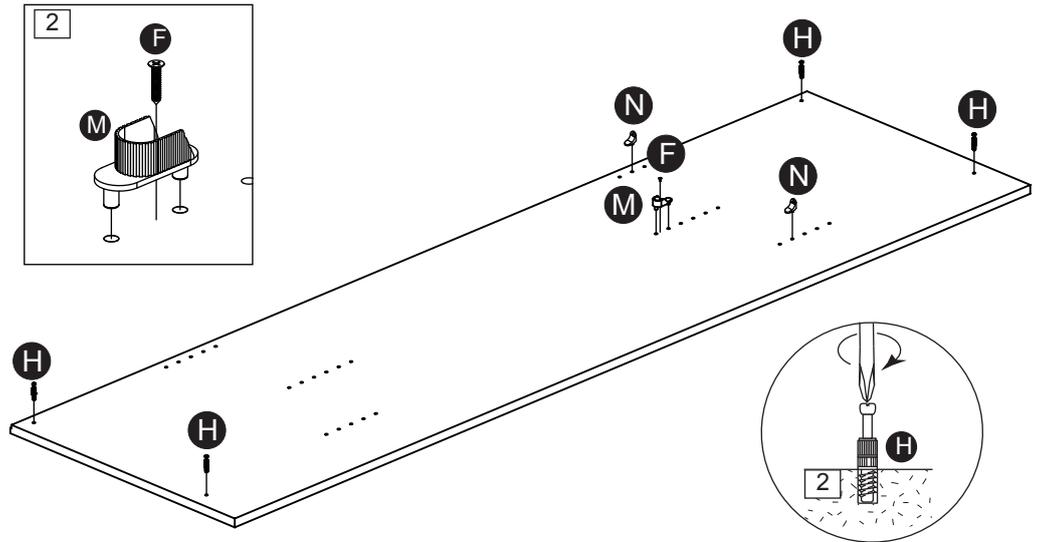


Step 8

Attaching panel

Position right side **2** onto top **6** and bottom **7**

Insert twister cam **1** into top **6** and bottom **7** where shown.

Use a screwdriver to turn locking nuts **1** clockwise to lock.

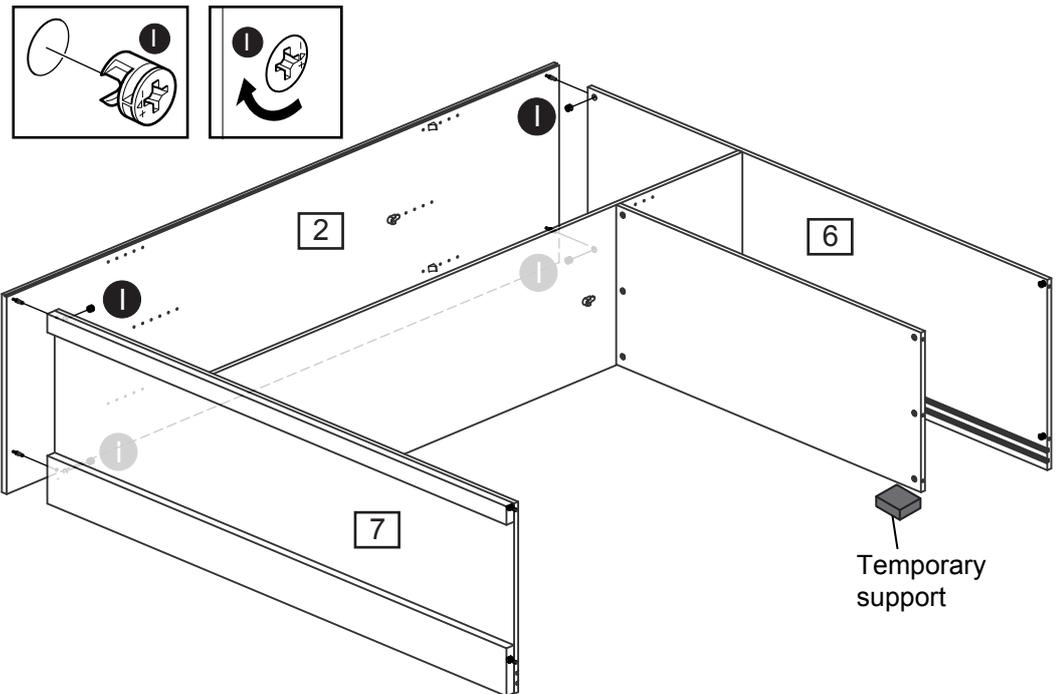


Step 9

Insert fittings

Screw locking screw **H** into left side **1** where shown.

Note: Insert locking screw **H** as far as shown. **Do not overtighten.**

Attach hanger rail support **M** using pozi screw **F** onto right side.

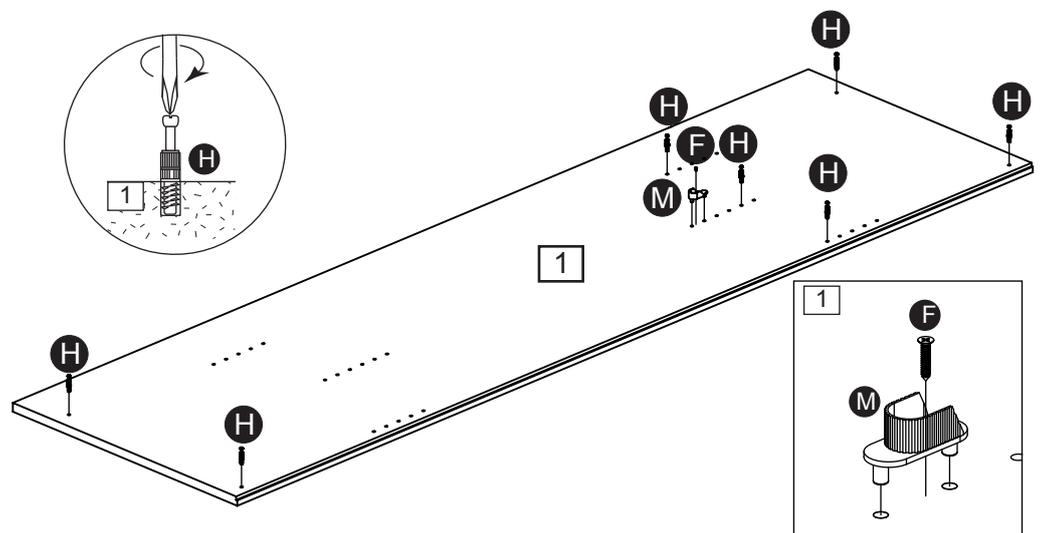



Assembly Instructions

Step 10

Attaching panel

Position left side **1** onto top **6**, large horizontal **8** and bottom **7**. Insert twister cam **1** into top **6**, large horizontal **8** and bottom **7** where shown

Use a screwdriver to turn locking nuts **1** clockwise to lock.

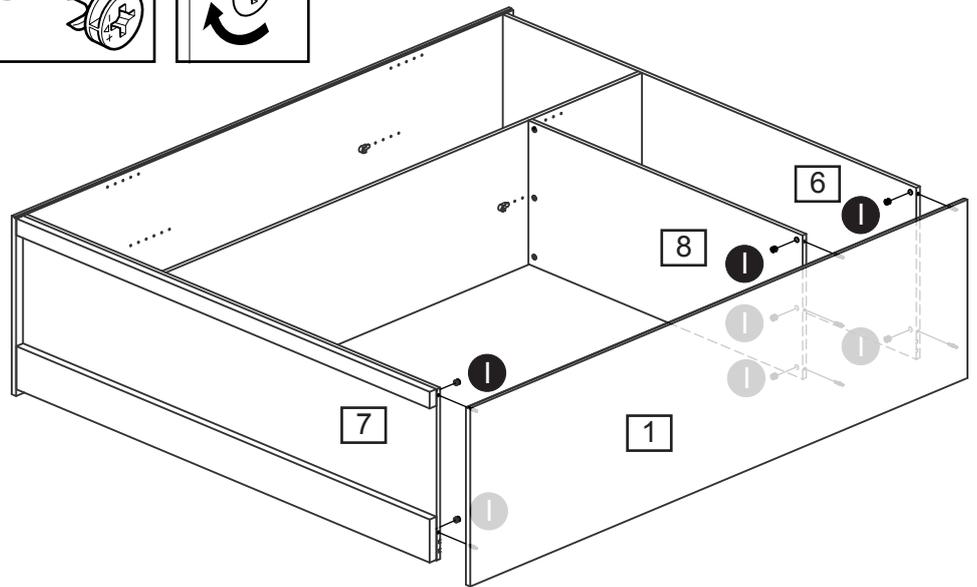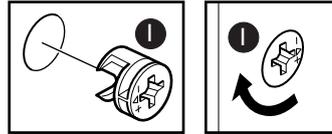

Step 11


Fitting back panels







Important! Cabinet MUST be 'square' before back is attached.

Attach back **9** and foldy back **10** to back of wardrobe with the coloured surface facing the inside of the unit using nails **P** and backpanel-screws **D**

Nails **P** should be spaced about 150mm apart.

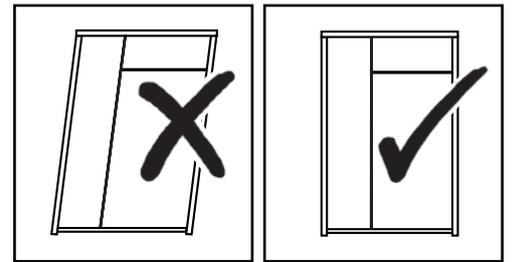

See page 2 for link to instruction video!

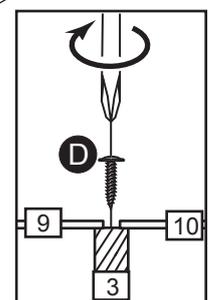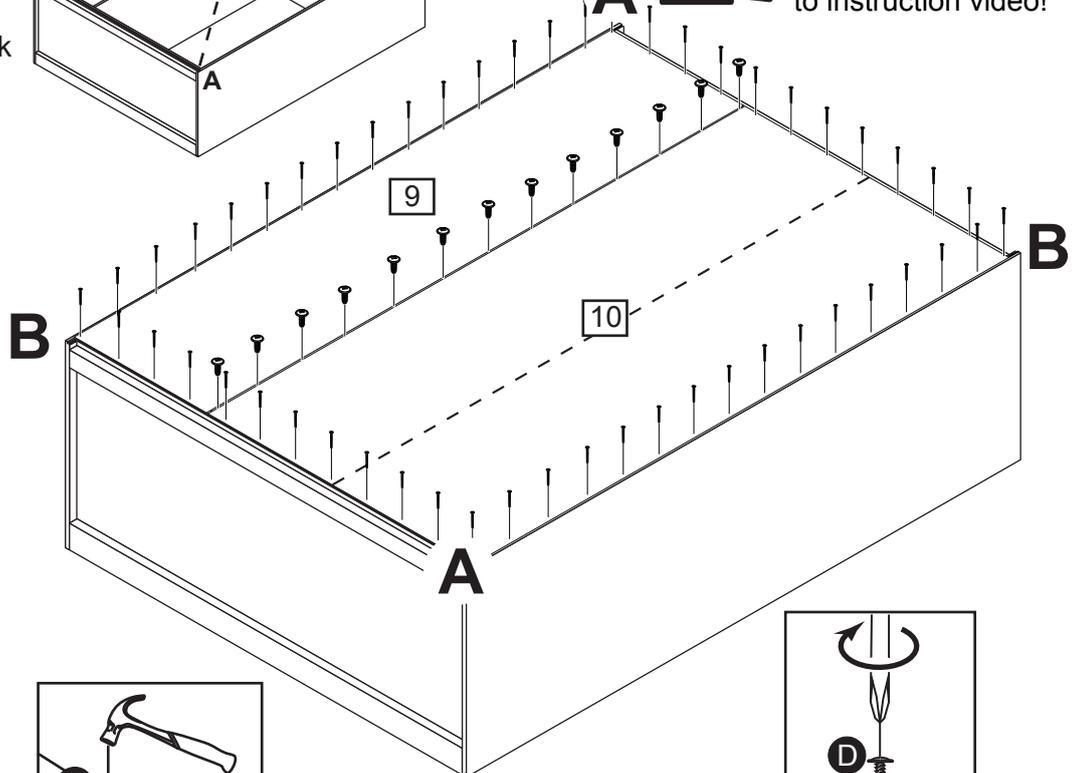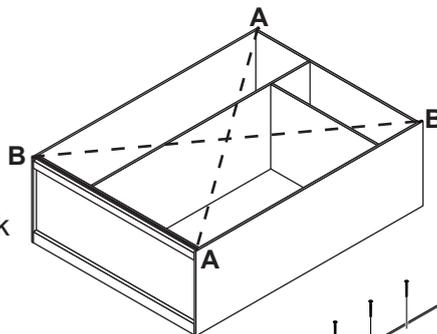


Assembly Instructions

Step 12


Align the unit

Stand up the unit

Use a spirit level to check if the base of this unit is level front-to-back¹, side-to-side² and top-to-bottom³ in the three positions shown.

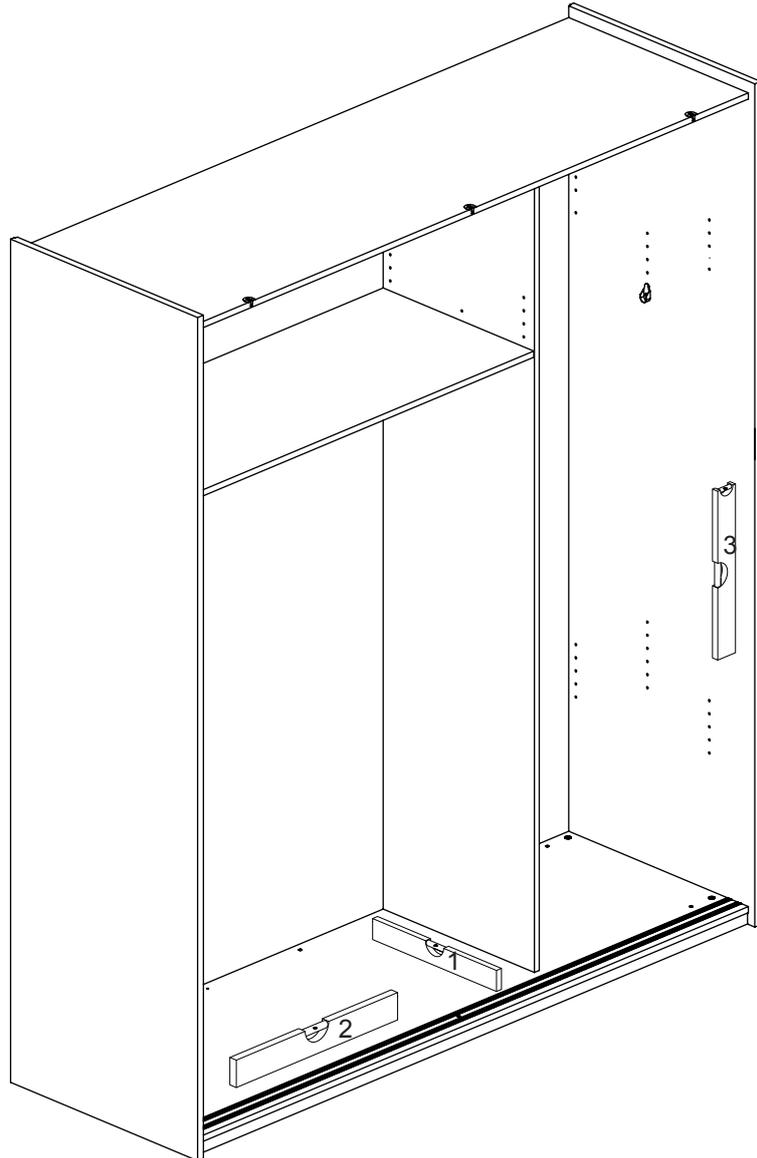

Use pegs **S** to level your unit in all three direction shown. Knock peg **S** in, as far as you require, under the ends of the unit and then snap off peg flush with the panel.

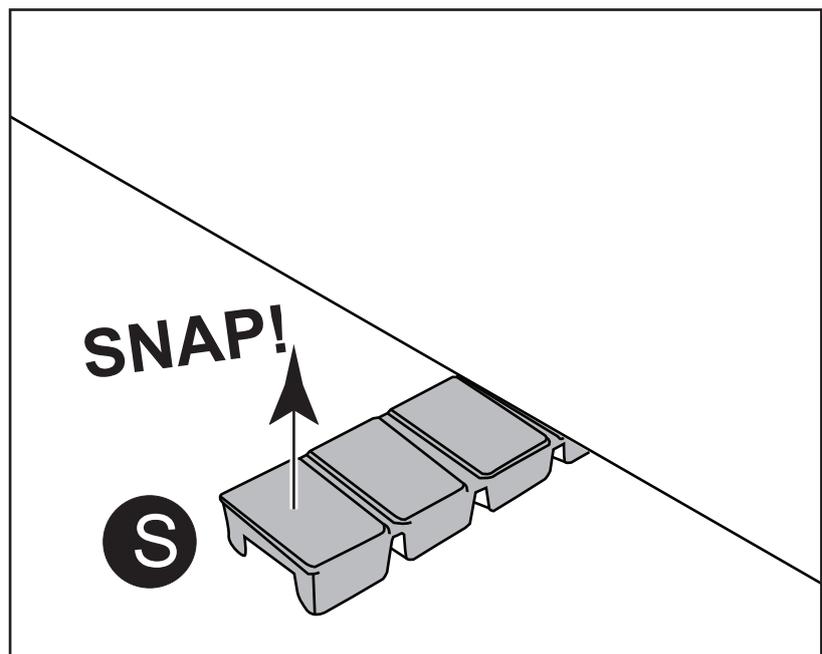


Assembly Instructions

Step 13

Insert shelf


Position shelf **5** onto shelf supports **N** and fix by screwing four chipsboard-screws **O** through shelf supports **N** into shelf **5**.

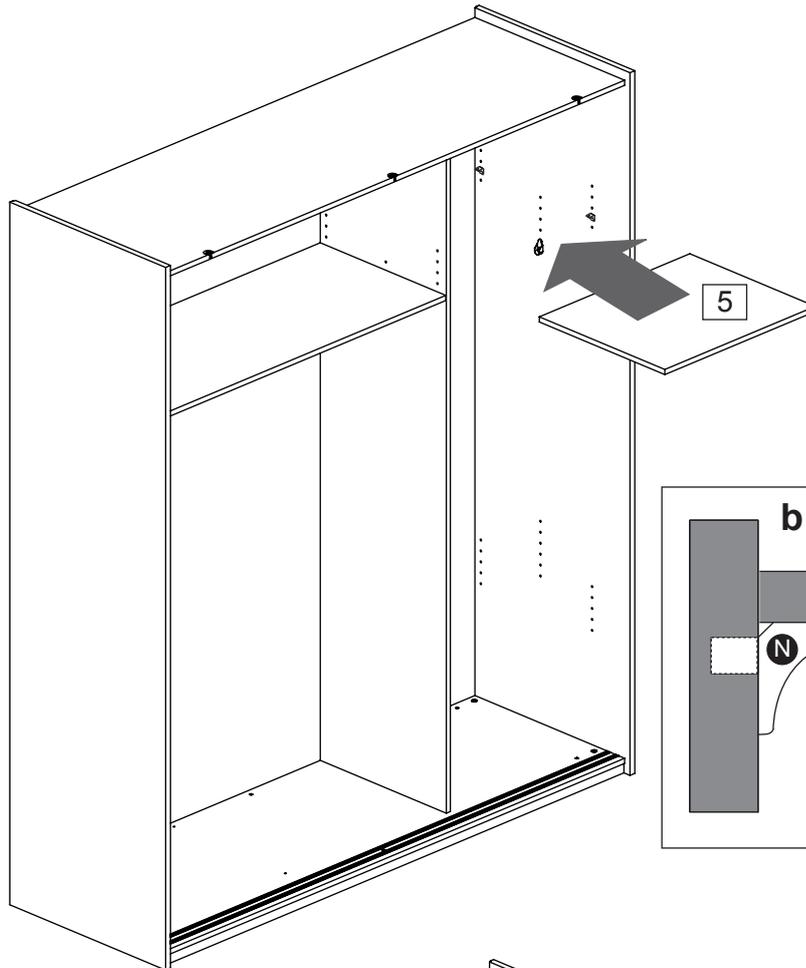

Step 14

Inserting hanger rails

Place hanger rails **U** and **V** onto hanger rail supports **M**.

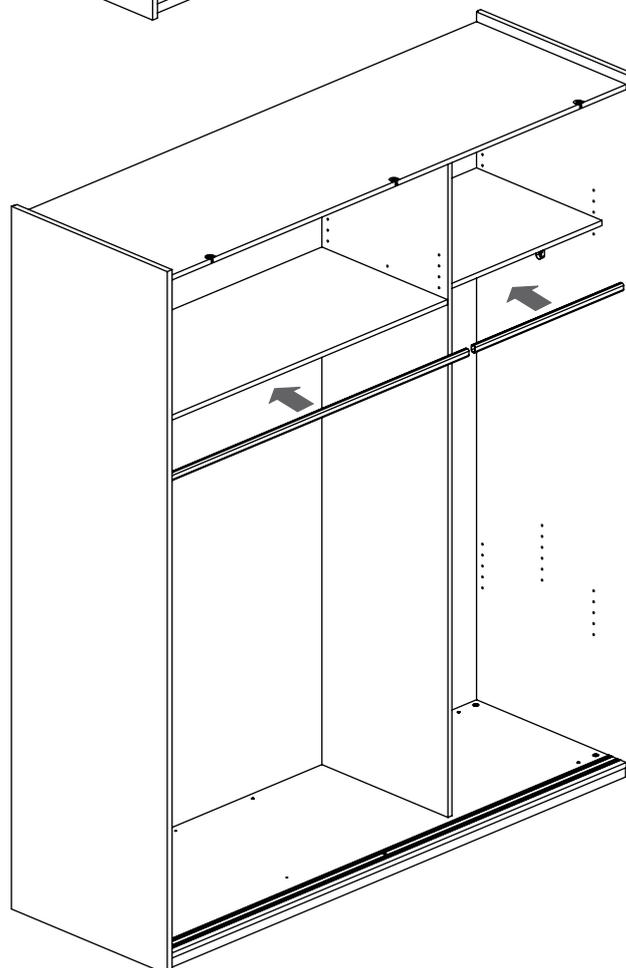

Assembly Instructions GLASS handle with care


Step 15

Insert fittings

Stick felts **Q** onto mirror slide door **11** where shown.

Insert Slidingdoor rollers **L** in mirror slide door **11** on the side which is flush with the handle mouldings **T**.

Insert slidingdoor guides **K** on the other end of the mirror slide door **11**.

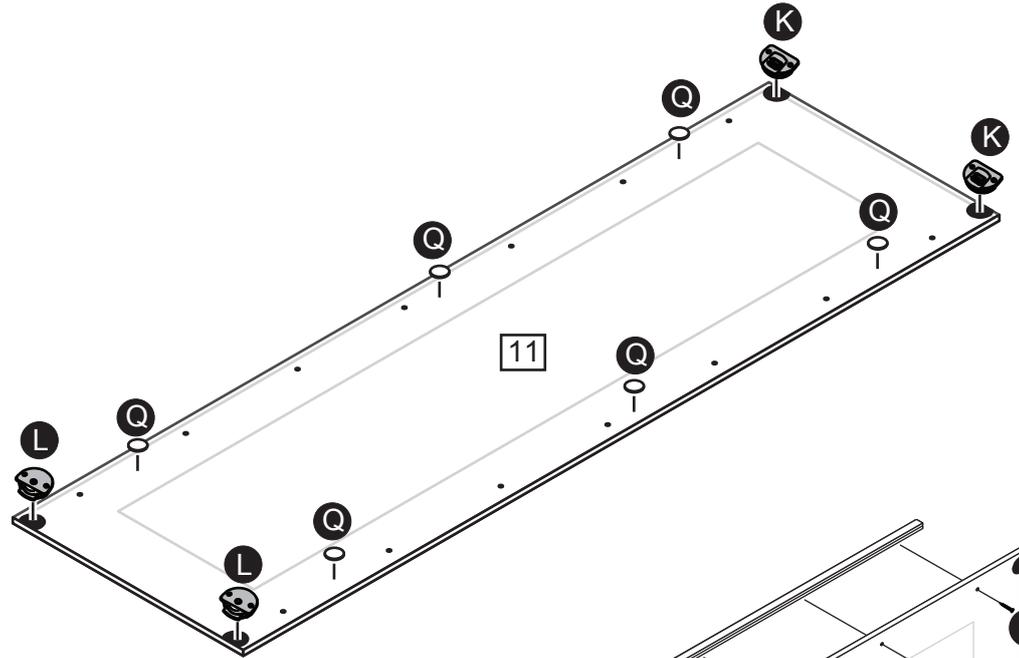


Step 16

Fitting handle to door

Hold handle mouldings **T** up against front of mirror slide door **11**, make sure the ends are flush with one end of the mirror slide door **11**.

Screw screws **E** into the 'V' groove of the handle moulding **T**.

Tip: start with the endscrews, then the centre screw and finally the other screws.

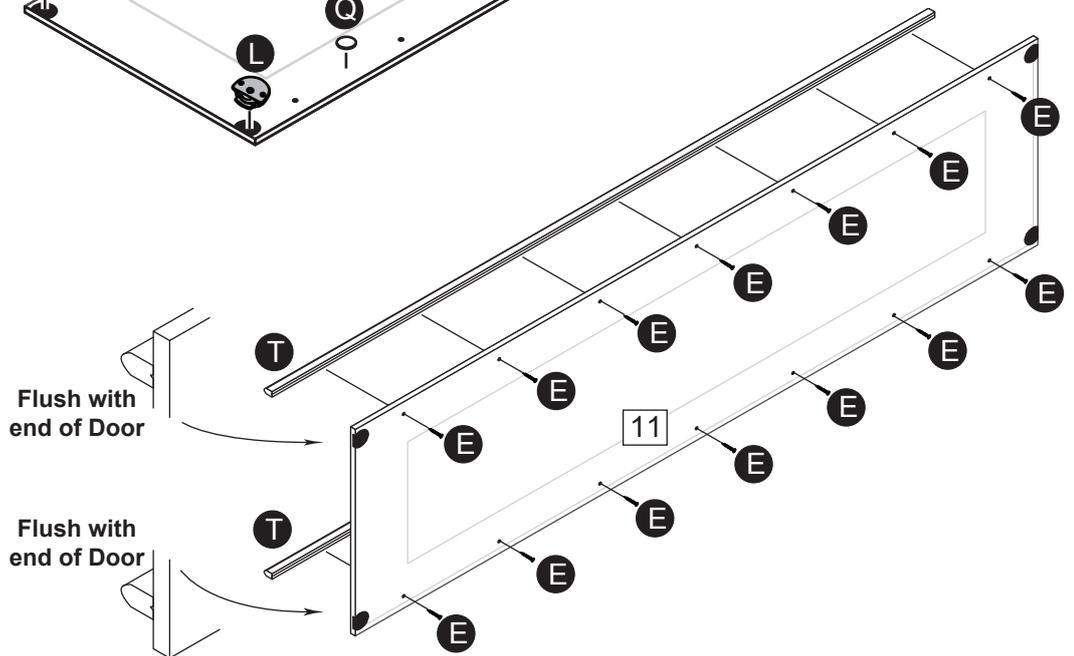

Step 17


Fitting handle to door

Hold handle mouldings **T** up against front of slide door **4**, make sure the ends are flush with one end of the slide door **4**.

Screw screws **E** into the 'V' groove of the handle moulding **T**.

Tip: start with the endscrews, then the centre screw and finally the other screws.

 See page 2 for link to instruction video!

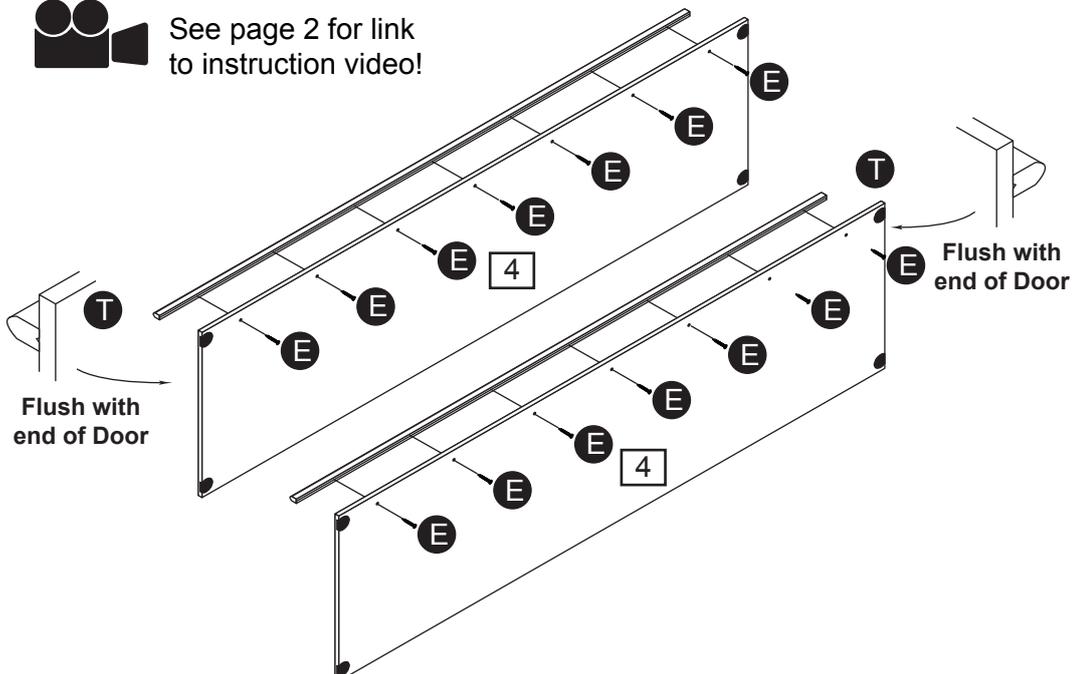

Assembly Instructions

Step 18

Insert fittings


Insert Sliding door rollers **L** in slide doors **4** on the side of the handle mouldings **T** on the end which is flush with the handle mouldings **T**.

Insert sliding door roller adjustables **J** in slide door **4** on the other side, fix them with backpanel screws **D**.

Insert sliding door guides **K** on the other end of the slide door **4**.



See page 2 for link to instruction video!

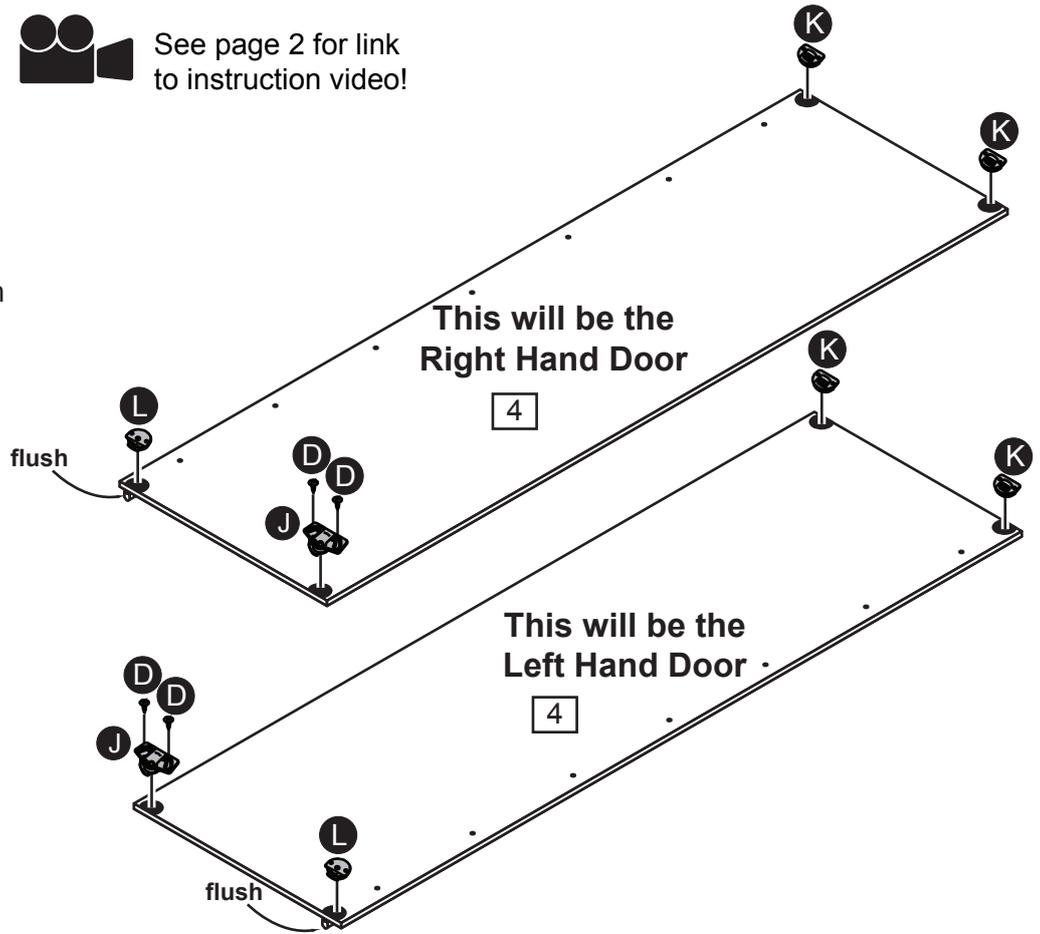

Step 19

Fitting of the doors






Important!

Double check if the unit is level before fitting the doors. If this is not the case please go back to step 12.

Fit slide doors **4** into the rear track.

Fit mirror slide door **11** into the front track.

See diagrams for more information about the fitting of the doors.

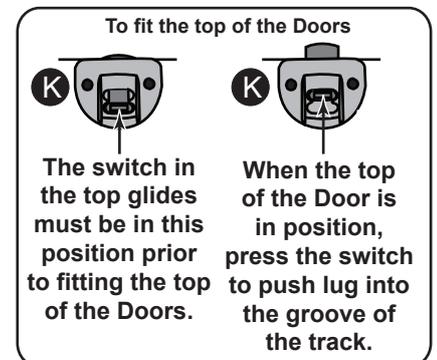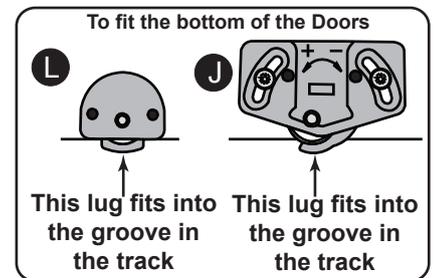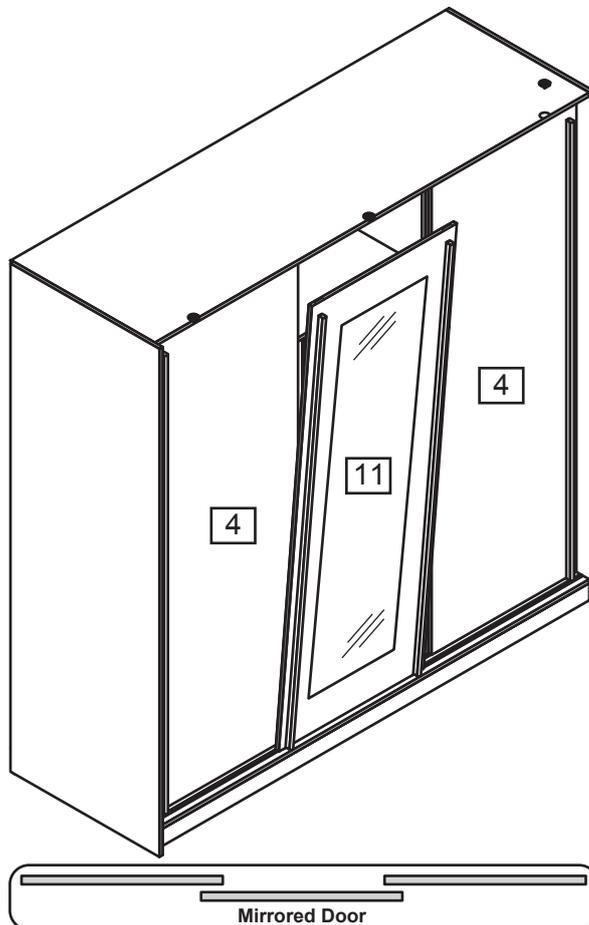

Assembly Instructions


Step 20

Insert fittings

Screw expanding dowel **C** into plinth top **14**.



See page 2 for link to instruction video!

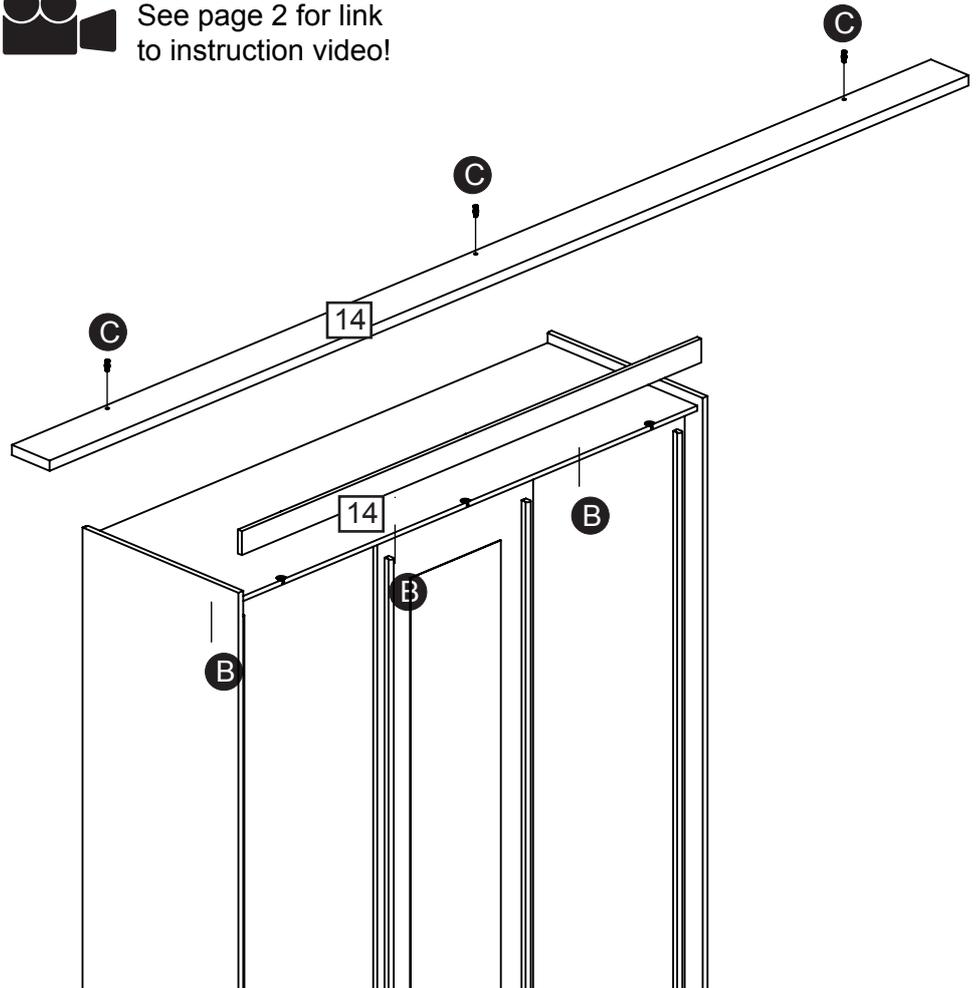

Step 21

Attaching plinth


Position the plinth top **14** above the unit and slot expanding dowels **C** into the expando housing **B**. The top of the plinth top **14** must be flush with the top of the unit.

Turn the screws in the expando housings **B** as far as they will go.

Step 22

Attaching pelmet

Position the pelmet **15** above the unit drilling-holes and turn the screws **A** as far as they will go.

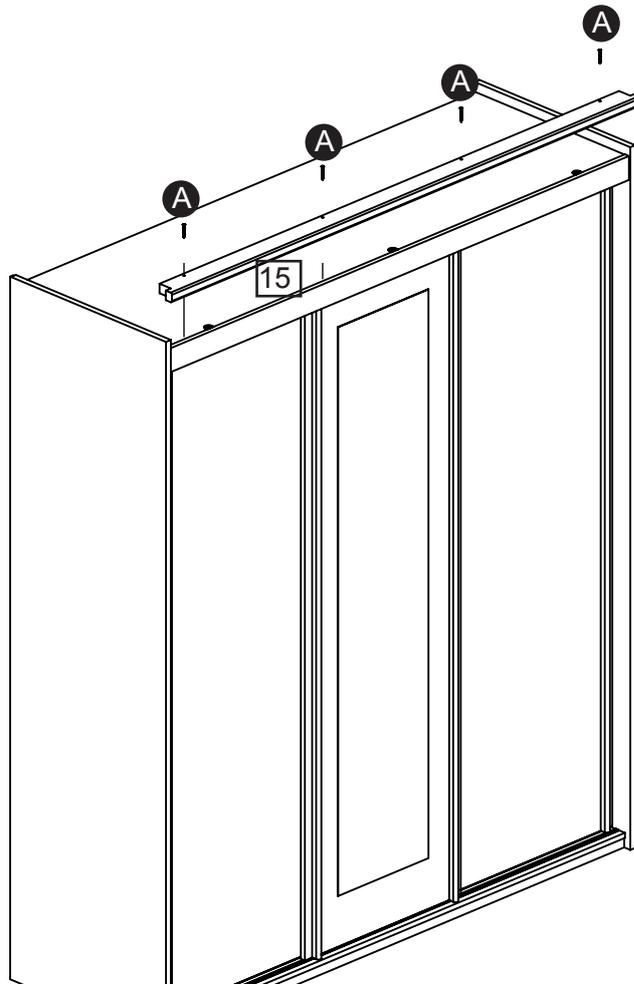

Assembly Instructions


Step 23

Attaching L-bracket

Position L-Bracket **G** onto top **6** as shown, fix by using 15mm screw **D**

Note: there are no pre-drilled holes for 15mm screw **D**.


Use **X** to fix on the wall, please see last page for more information.

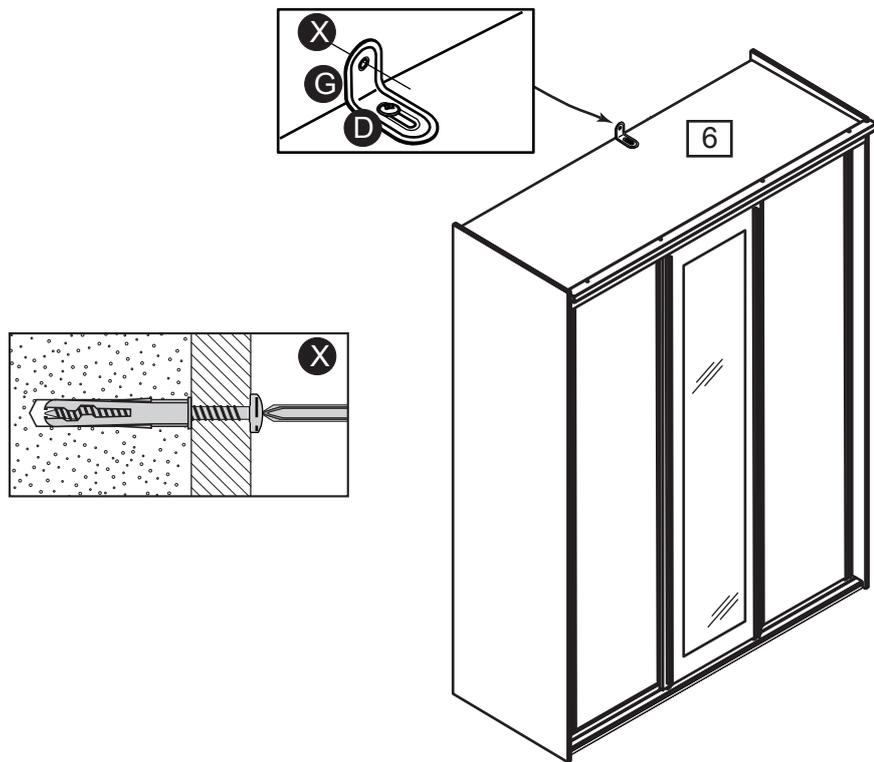

Step 24

Attaching door-stops

Stick 2 door-stops **R** onto the outside edge of each plain door to act as buffers between the doors and side panels.

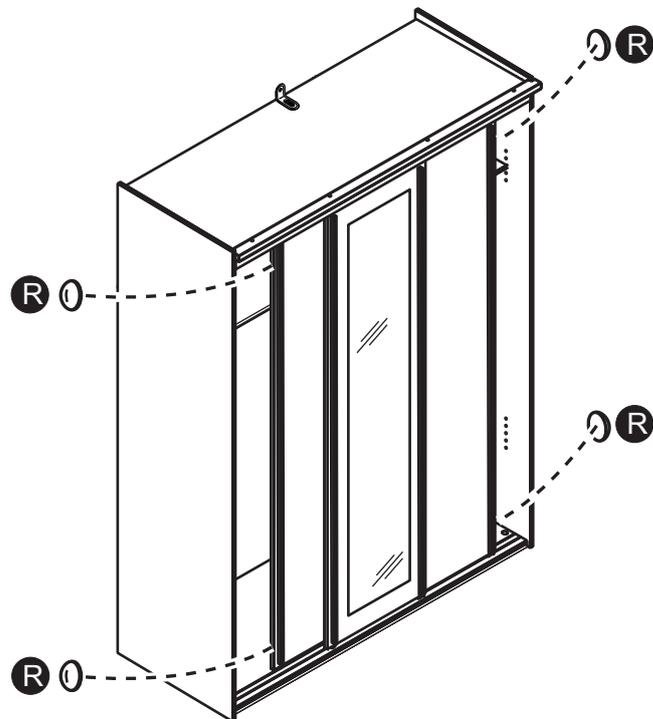



Assembly Instructions

If your doors do not run smoothly

Level & square the unit

Level & square the unit up:
Knock the pegs **S** as far as you require, under the ends of the unit and then snap off flush with the panel.



For more detailed information see step 12.

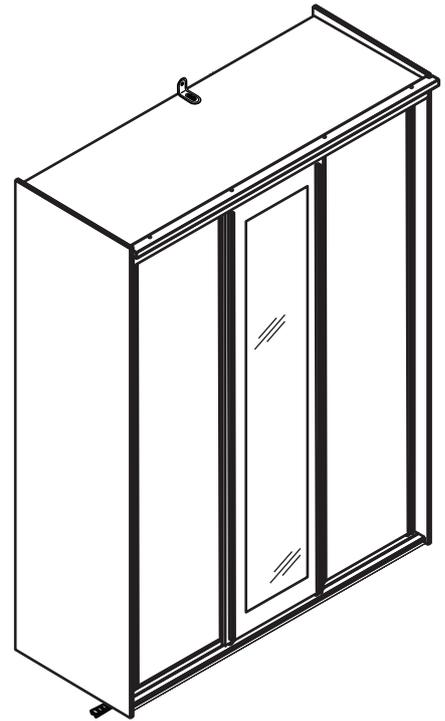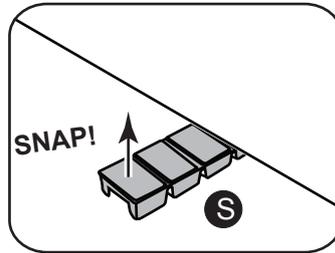

Raise the door

To raise the door, loosen the screws and swivel the glide towards the '+' arrow.



Re-tighten the screws.

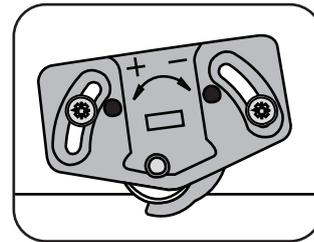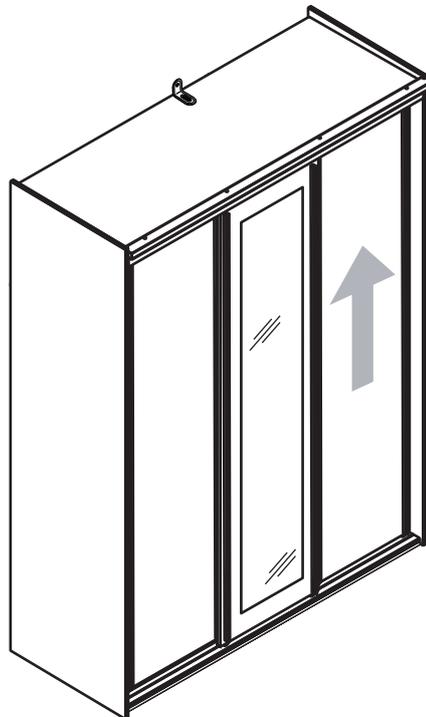

Lower the door

To lower the door, loosen the screws and swivel the glide towards the '-' arrow.

Re-tighten the screws.

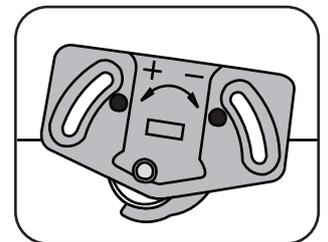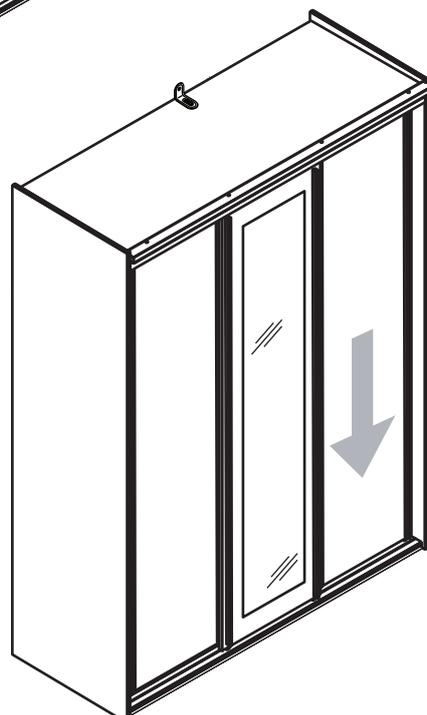

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: **General rule:**  Always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

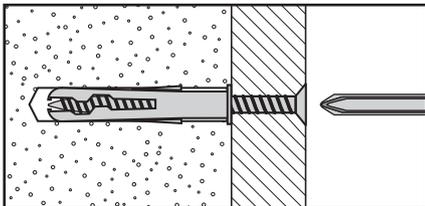


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

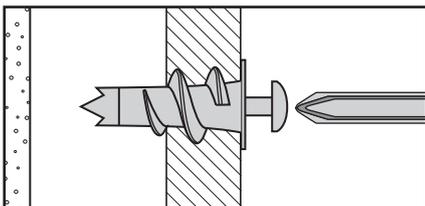


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

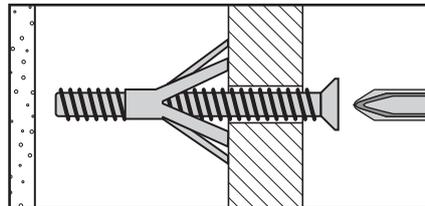


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

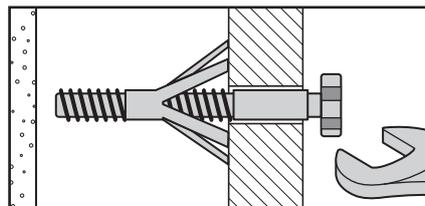


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

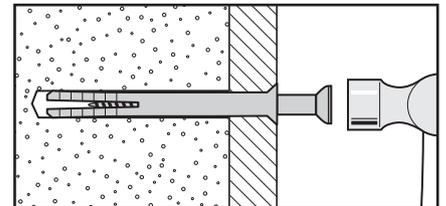

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

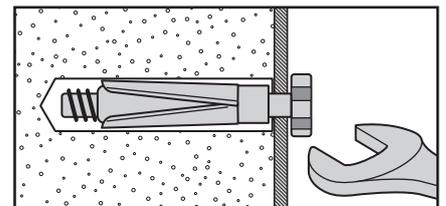

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.