

## ASBER 3LT ROUND MINI PLATE FIXING INSTRUCTIONS

Please read these instructions carefully prior to installation and retain them for future reference. **THIS PRODUCT IS FOR INDOOR USE ONLY.**

This product is only suitable for connection to a 230-240V~ 50Hz supply and in accordance with I.E.E. Wiring Regulations.

If in doubt we recommend you consult a qualified electrician.

### IMPORTANT

Our products should not be modified. If any modification is made it will invalidate the warranty and may render the product unsafe.

Fuse value: A light fitting should be connected to a lighting circuit protected by a 5-amp fuse. If a light fitting is to be connected to a ring main, a fused connection unit fitted with a 3-amp fuse should be installed.



This product is suitable for mounting onto a normally flammable surface .



The symbol on the product dictates that the lamp head must be at least 0.5m (50cm) from the lit surface. Do not angle the spotlight heads towards one another, as the heat generated could cause fire.

Shade and bulb can become hot in use; allow to cool down before cleaning or maintenance.

### DO NOT TOUCH THE BULB WITH YOUR SKIN UNDER ANY CIRCUMSTANCES.



WASTE ELECTRICAL PRODUCTS SHOULD NOT BE DISPOSED OF WITH HOUSEHOLD WASTE. PLEASE RECYCLE WHERE FACILITIES EXIST. CHECK WITH YOUR LOCAL AUTHORITY FOR RECYCLING ADVICE.

### SAFETY


Before commencing installation or maintenance, isolate the mains supply by switching off at the fuse box and removing the relevant circuit fuse. This will prevent accidental switching on whilst work is in progress.

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH NATIONAL BUILDING REGULATIONS.**

**THIS PRODUCT CAN GET EXTREMELY HOT DURING USE. CAUTION MUST BE TAKEN WHEN MAINTAINING, ADJUSTING OR CLEANING THE LUMINAIRE**

### INSTALLATION INSTRUCTIONS

1. Please note: you may need assistance to support the unit while fixing it to the surface and connecting to the supply.
2. Remove the mounting brackets from the fitting, by unscrewing the retaining screws on the canopy, See fig.1, Using the mounting bracket as a template, mark the position of the fixing holes on the mounting surface.
3. Pre-drill these holes taking care not to foul any pipes or mains cables beneath the surface.
4. Securely fasten the metal mounting brackets to the ceiling using the mounting screws and wall plugs, (supplied), See fig.1. Ensure that you do not trap or strain any cables between the mounting surface and the brackets.
5. Bring the mains supply to connect into the terminal blocks of the fitting as shown in below diagram.

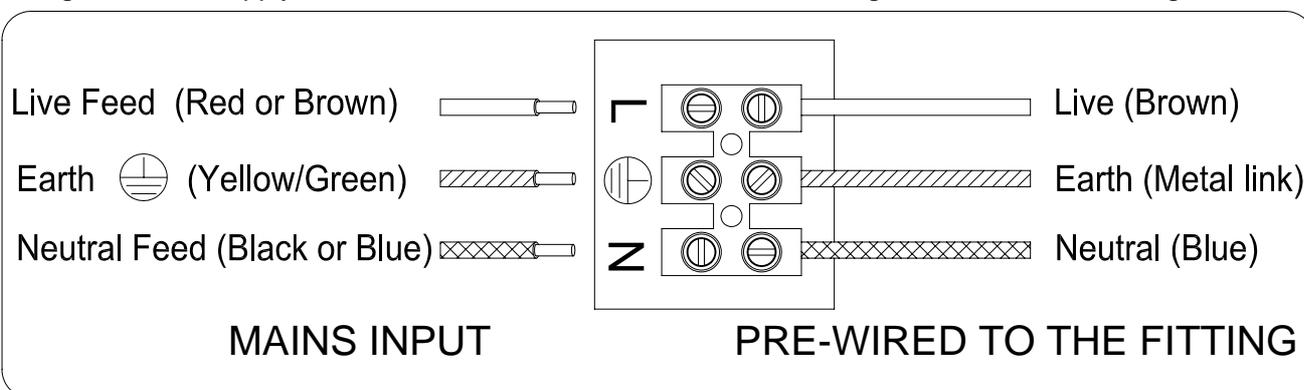


6. **Ensure that the incoming mains cables correspond to the labelled on the terminal block. The incoming live supply wire must be opposite the terminal marked L, and the incoming neutral supply wire must be opposite the terminal marked N . This fitting MUST be earthed. Ensure that the incoming Earth lead are connected to the terminal marked with the earth symbol.**
7. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.

8. Position the canopy of the fitting over the mounting brackets and secure back into position by replacing the two retaining screws.
9. Fit the bulbs (bulb included): 3x **Max. 50W GU10 Self Shielded Halogen Bulb**. See fig. 1
10. Installation is now complete. Replace the circuit fuse and switch on at the mains to test.

### **BULB REPLACEMENT**

1. Switch off the mains power supply.
2. Before replacing the bulb, allow it to cool down for at least 10 minutes.
3. Never touch the bulb with your fingers directly, cover it with a cloth.
4. Loosen the bulb and remove it from the lamp.
5. Replace a new bulb with same voltage and wattage.

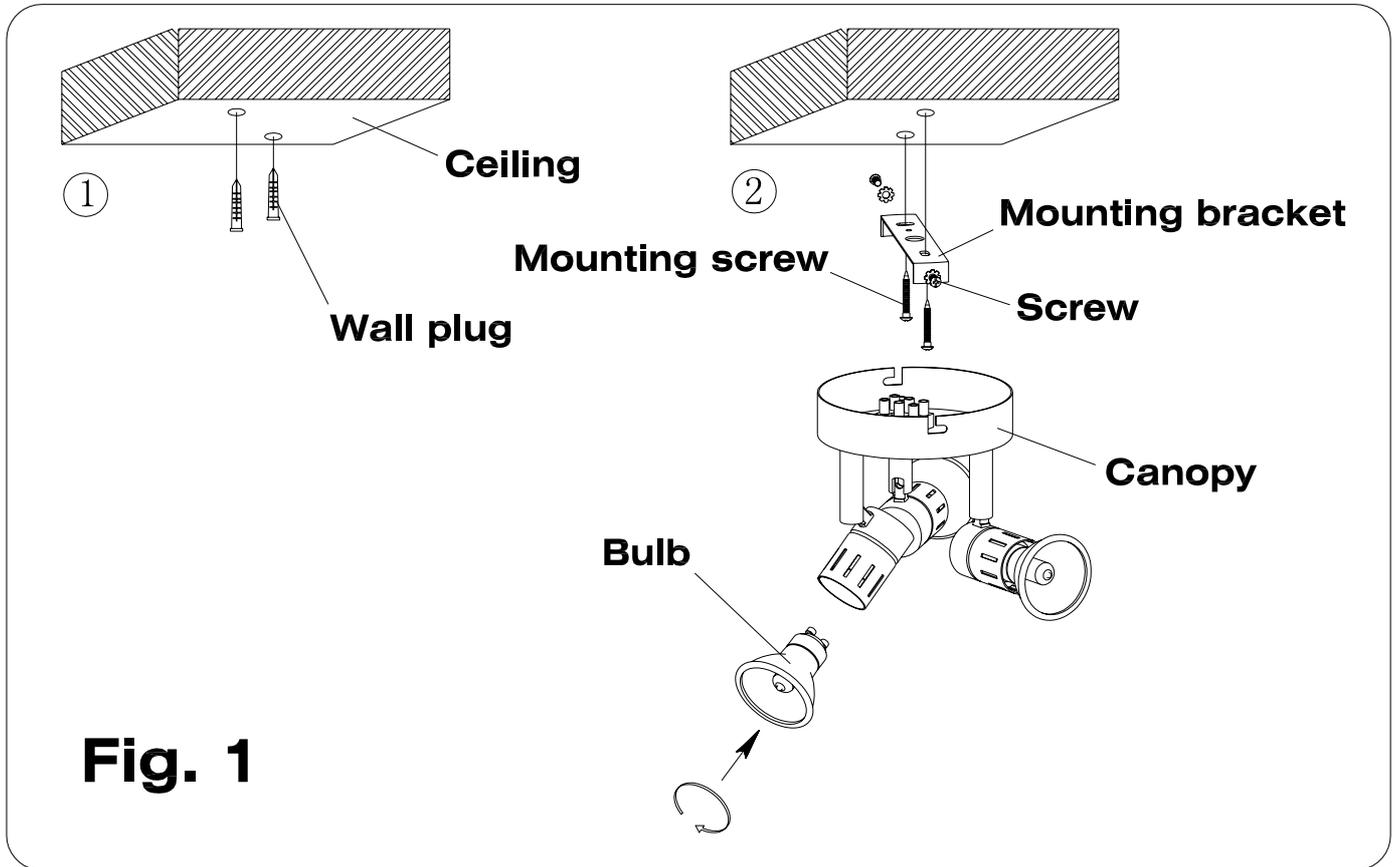

**Model No. : GYSP2322-3P**

**Input Voltage: 230-240V~50Hz**

**Max. Wattage: 150W**

**Bulb: 3x Max. 50W GU10 Self Shielded Halogen Bulb.**

**Argos Limited, Avebury, 489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, MK9 2NW.**

**16/5/08**