


Instructions for use

Page 4

1. Before replacing the bulb, please make sure the lamp is turned off and unplugged. And that the unit has cooled down.
2. Do not handle the bulb with bare hands at any time. Oil from your skin will shorten the life of the bulb and cause weakness to the integrity of the glass. If you need to handle the bulb, use soft, lint-free cloth to cover the bulb.
3. Keep lamp away from flammable items such as curtains, clothing, etc.
4. Never leave the lamp on when you leave a room or are not at home.
5. To reduce the probability of a tip-over, keep children and pets away from the lamp.
6. This light use a ES GLS bulb of 60 W (or less) or a recommended ES CFL bulb of 20W.
7. Do not place the lamp less than 0.3m from any ceiling, wall or combustible Surface.
8. If the external flexible cable or cord of this luminaire is damaged, please dispose of the lamp in a reasonable way. It could not be replaced.

BRASS SWING ARM FLOOR STANDING LAMP

Instructions for installation - -Please keep for future reference Page 1

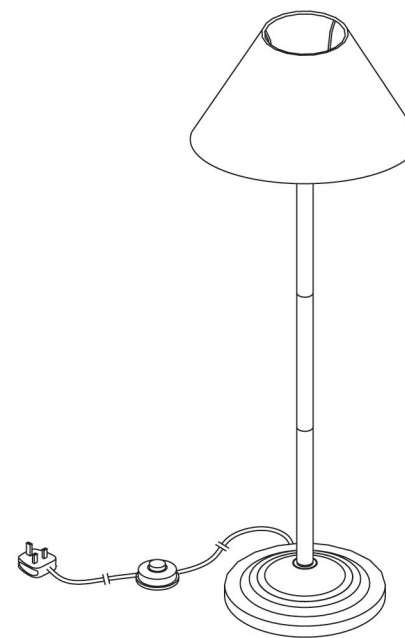

Important

1. Read these instructions carefully and familiarise yourself with the procedure before assembling the unit.
2. Check that you have all the component parts following the list on the back cover and familiarise yourself with each part before proceeding.
3. Take all the fittings out of the plastic bag and separate them into their groups.
4. Ensure you have enough space to lay out all the parts before assembly.
5. To avoid scratching it is recommended that you assemble the light on a soft level surface.

Product information

Page 2

Technical Data

Model no. : 430/8265 (D)

Input voltage : 220-240V~50Hz

Bulb : 1 X max. 60 W ES GLS bulb or recommended 1Xmax.20W ES CFL bulb.



This product should not be positioned within 0.3metres of a lit object.



This product is safe to fit to flammable surfaces.



This product is for domestic indoor use only.




This product is double insulated therefore does not require an earth connection.



Argos Limited, Avebury, 489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, MK9 2NW

Fitting

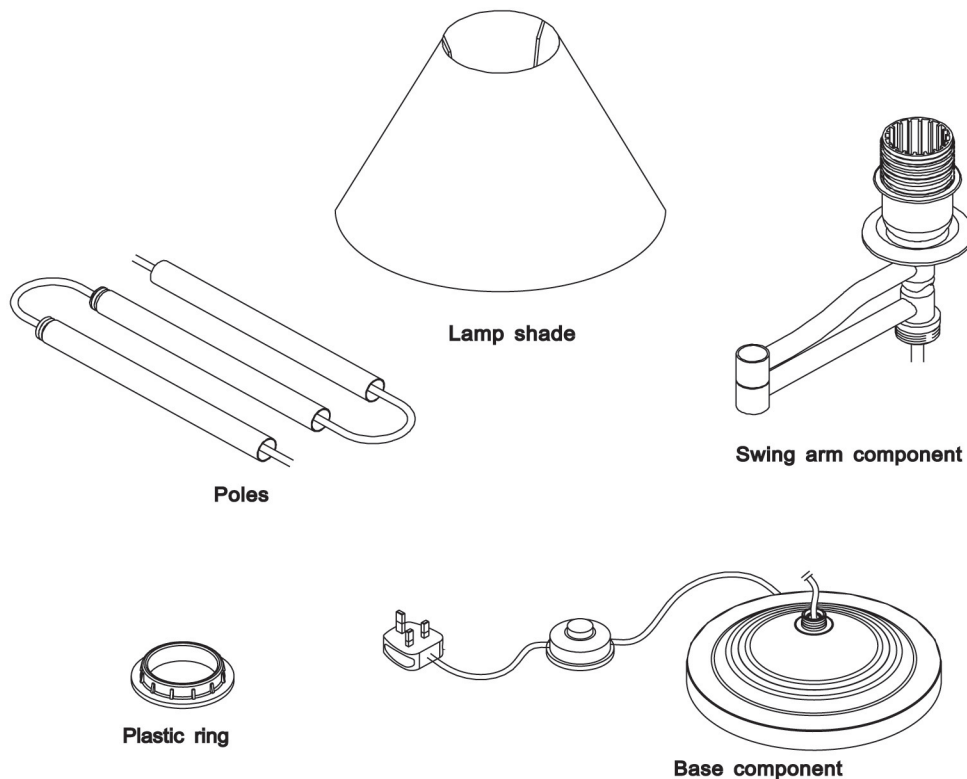

Assembly instructions

Page 3

1. Screw the Tube A to the connector on the Base component, then screw the Tube B to the connector on the Tube A and screw the Tube C to the connector on the Tube B. Screw the Swing arm component into the Tube C. Finally, pull the External flexible cable to its utmost. (See fig. 1)
2. Pull the External flexible cable to strain the part of cable under the base. Fit the strained part of cable into the slot on the base's bottom. Tighten the screw on the bushing to secure the cord. (See fig. 2)

3. Put the lamp shade on the Lampholder and fix it with Plastic ring. (See fig. 3)

4. Insert the ES GLS Bulb or recommended ES CFL bulb. (See fig. 4)

NOTE: Never touch the bulbs with your fingers directly. Always cover them with a cloth.

