

TWIN BATHROOM G9 WALL LIGHT

FIXING INSTRUCTIONS

Thank you for buying this quality light fitting. Please read these instructions carefully prior to installation and retain them for future reference. **THIS PRODUCT IS FOR INDOOR USE ONLY.**

This product is only suitable for connection to a 220-240V- 50Hz supply and in accordance with I.E.E. Wiring Regulations.

If in doubt we recommend you consult a qualified electrician

IMPORTANT

Our product should not be modified. If any modification is made it will invalidate the warranty and may render the product unsafe.

Fuse value: A light fitting should be connected to a lighting circuit protected by a 5-amp fuse (or 6-amp residual current device). If a light fitting is to be connected to a ring main, a fused connection unit fitted with a 3-amp fuse should be installed.



This product is suitable for mounting onto a normally flammable surface.

DO NOT TOUCH THE BULB WITH YOUR SKIN UNDER ANY CIRCUMSTANCES.



WASTE ELECTRICAL PRODUCTS SHOULD NOT BE DISPOSED OF WITH HOUSEHOLD WASTE. PLEASE RECYCLE WHERE FACILITIES EXIST. CHECK WITH YOUR LOCAL AUTHORITY FOR RECYCLING ADVICE.

SAFETY

Before commencing installation / maintenance, isolate the mains supply by switching off at the fuse box and removing the relevant fuse to prevent accidental switching on whilst work is in progress.


Warning, This product contains glass parts, care must be taken when fitting or handling these parts to prevent personal injury, or damage to the product.

Shade and bulb can become hot in use, allow to cool prior to adjustment, cleaning or maintenance.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH NATIONAL BUILDING REGULATIONS.

INSTALLATION INSTRUCTIONS

1. Disassemble the back plate from the fitting by removing the two retaining nuts at the front of the canopy.
2. Offer the back plate to the mounting surface and mark the position of the drill holes. Pre-drill these holes taking care not to foul any pipes or mains cables beneath the surface.
3. Pass the mains cable through the hole in the rear of the back plate, mount the back plate to the mounting surface using the supplied plugs, screws and plastic washers.
4. Put the silicone ring along the opening edge of the back plate. Please take note that the beginning and the ending of the silicone ring should be aligned the U slot at the side of the canopy.

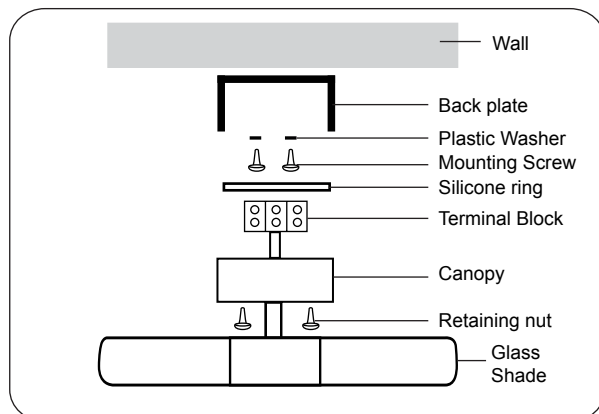

5. Bring the mains supply to connect into the terminal blocks of the fitting as shown in below diagram.

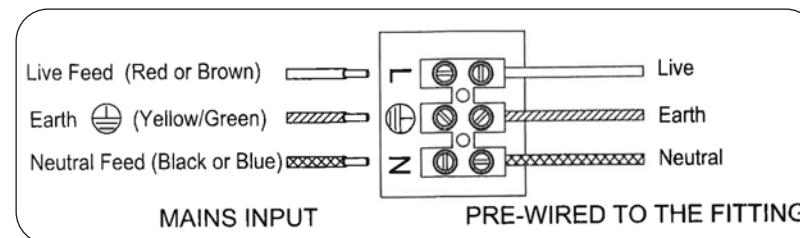


Ensure that the incoming mains cables correspond to the labelled on the terminal block. The incoming live supply wire must be opposite the terminal marked L, and the incoming neutral supply wire must be opposite the terminal marked N. This fitting Must be earthed. Ensure that the incoming Earth.

6. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.
7. Fix the unit to the back plate using the supplied washers and retaining nuts.
8. Fit the recommended bulb type: **Max. 25W G9 self shielded Halogen Capsule Bulb (Supplied).**
NOTE: MAKE SURE BULB IS COLD BEFORE REPLACING. These fittings get extremely hot.
9. Screw the glass shade onto the lampholder.
10. Installation is now complete. Replace the circuit fuse and switch on at the mains to test.
11. The symbol $\text{---}0.5\text{m}$ on the product dictates that the lamp head must be at least **0.5m (50cm)** from the lit surface.

LOCATION OF INSTALLATION

This fitting is Rated IP44. This means the fitting can be installed in Bathroom Zones 2 and the outsides of the Zones, not for Zones 0 or 1. Wall mounted use only.

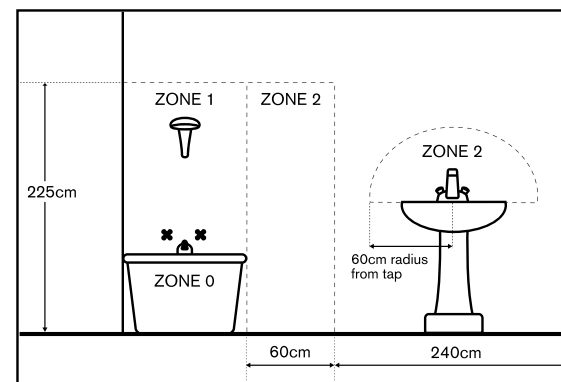

Bathroom Zone Guide

Please note:
This is a guide for household use.
Please consult a qualified electrician for further assistance.

Model No. : WL225PS
Input Voltage : 220-240V ~ 50Hz
Max.Wattage : 2 x 25W
Bulb : 2 x Max. 25W G9 Bulb
Argos Limited, Averbury, 489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, MK9 2NW

