

Instruction Manual

Please read these instructions carefully prior to installation and retain them for future reference.


USE & MAINTENANCE:

1. This product is suitable for indoor only.
2. To avoid risk of electric shock, fire, do not modify this lamp. If any modification is made, it may render the product unsafe.
3. This fitting should be connected to a lighting circuit protected by a 5-amp fuse. If this fitting is to be connected to a ring main, a fused connection unit fitted with a 3-amp fuse should be installed.

INSTALLATION INSTRUCTIONS:




Switch off the electricity supply at the mains before commencing installation and remove the circuit fuse.

1. This product must be installed in accordance with **National Building Regulations**. If in doubt, please consult a competent electrician.
2. Using the canopy as template, mark the position of the two fixing holes on the ceiling.
3. Pre-drill these holes, beware not to foul any pipes or mains cables beneath the surface.
4. Feed the incoming cable through the rubber bushing at the cable exit. Securely fasten the canopy to the ceiling using suitable screws and wall plugs (supplied).
5. Bring the incoming cables to connect into the terminal blocks inside the lamp base. Ensure they are corresponding to the labels on the terminal block. The incoming live supply wire must be opposite the terminal marked **L**, and the incoming neutral supply wire must be opposite the terminal marked **N**. This fitting **MUST** be earthed and the earth lead must be connected to the terminal marked with the **Earth** symbol.

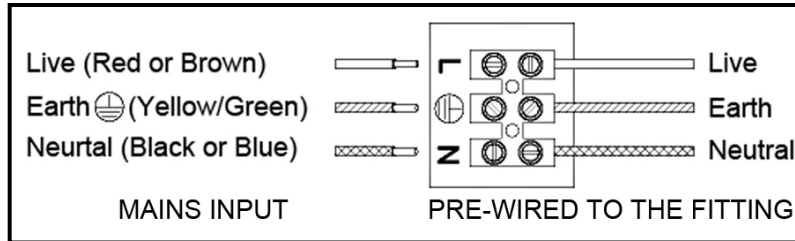


6. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.
7. Screw the 60W E27 GLS Bulb (**bulb not included**) into lamp socket.
8. Place the glass panel on the glass shade as per installation diagram
9. Insert the glass shade into the canopy and turn clockwise to secure it.
10. Installation is now complete. Replace the circuit fuse and switch on the mains to test.

NOTES:

1. The symbol  indicates this product is suitable for mounting onto a normally flammable surface.
2. Fit the recommended bulb type: **Max. 60W E27 GLS Bulb**. DO NOT EXCEED RECOMMENDED MAXIMUM WATTAGE. WARNING – First turn off electricity.
3. The symbol  indicates that the bulb must be at least 0.3m (30cm) from the lit surface.
4. Replace any cracked protective shield .


5. This product is designed to be used in bathroom Zone 2 or any area outside these zones. It is ceiling mounted use only.

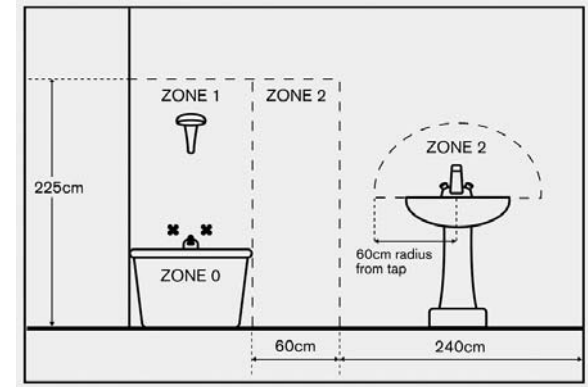

BULB REPLACEMENT

1. Switch off the mains power supply.
2. Before replacing the bulb, allow it to cool down for at least 10 minutes.
3. Never touch the bulb with your fingers directly, cover it with a cloth.
4. Loosen the bulb and remove it from the lamp.
5. Replace a new bulb with same voltage and wattage (**Max. 60W E27 GLS Bulb**)

INSTALLATION DIAGRAM:

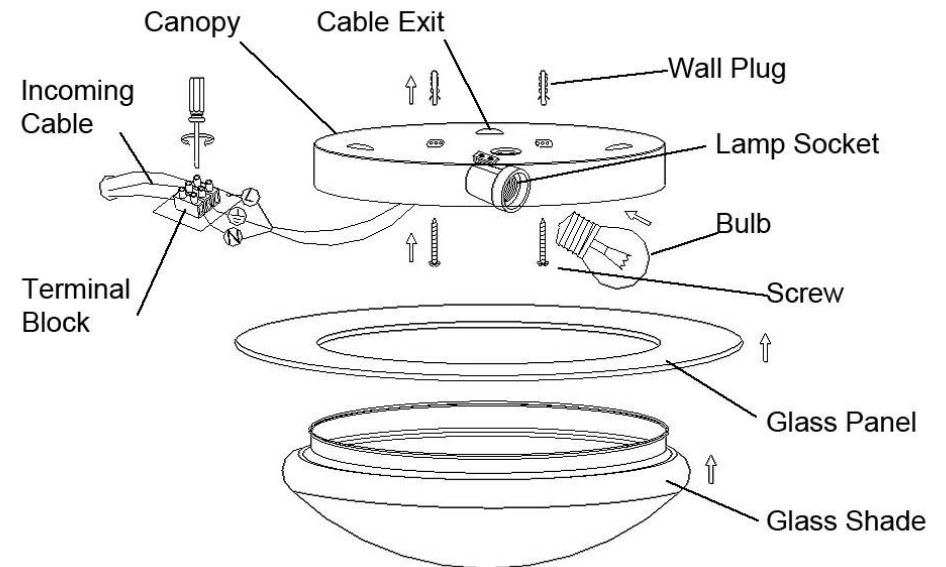

Model: ASC052

Input Voltage: 220-240V ~ 50Hz

Max. Wattage: 60W

Bulb: Max. 60W E27 GLS Bulb



Argos Limited

Avebury, 489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, MK9 2NW