


Pair Of Cross Back Chairs

Assembly Instructions - Please keep for future reference

451 / 6882

481 / 2562

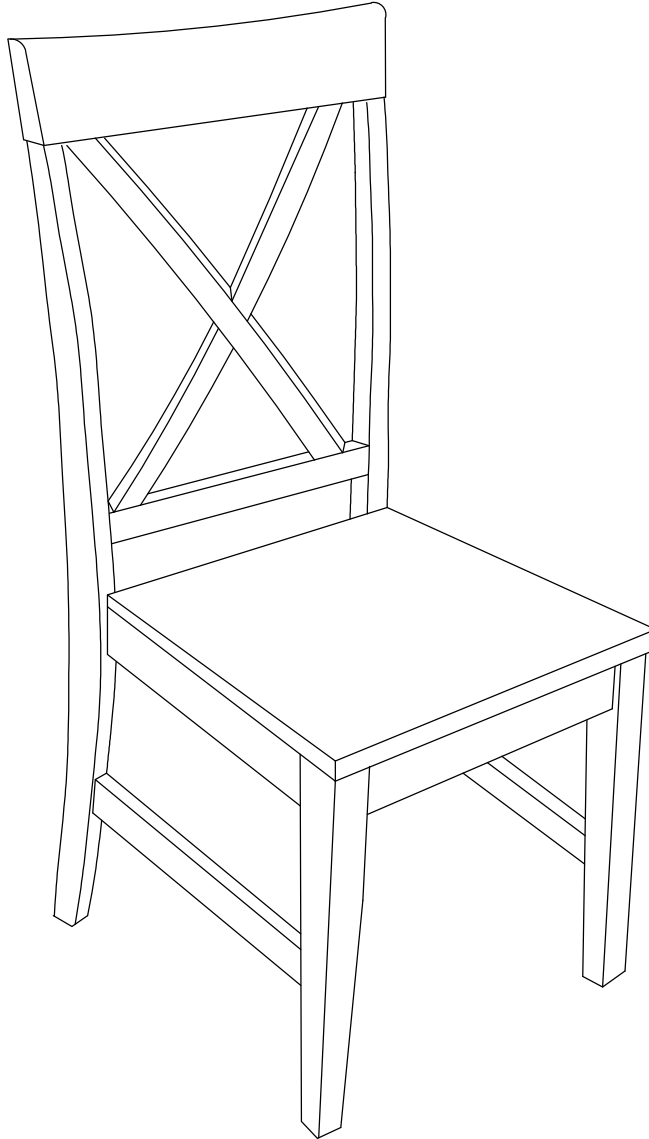

Dimensions

Width - 43 cm

Length - 49 cm

Height - 93 cm


Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline** :
Argos 0345 640 0800



Safety and care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2.
 - Remove all fittings from the plastic bags and separate them into their groups.
 - Keep children and animals away from the work area, small parts could choke if swallowed.
 - Make sure you have enough space to layout the parts before starting.
 - During assembly do not stand or put weight on the product, this could cause damage.
 - Assemble the item as close to its final position (in the same room) as possible.
 - Assemble on a soft level surface to avoid damaging the unit or your floor.
 - Parts of the assembly will be easier with 2 people.
- 
- power drill is set on a low torque setting.
- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.
 - Maximum Safe user weight : 110kgs
 - Do not stand on the chair
 - Do not use this chair as step ladder.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightened properly.


Note : if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Part


If you have damaged or missing components
, call the Customer Helpline :
Argos= 0345 640 0800

Please check you have all the parts listed below


- 1 Back rest x2
(4.1 x 93.2cm)

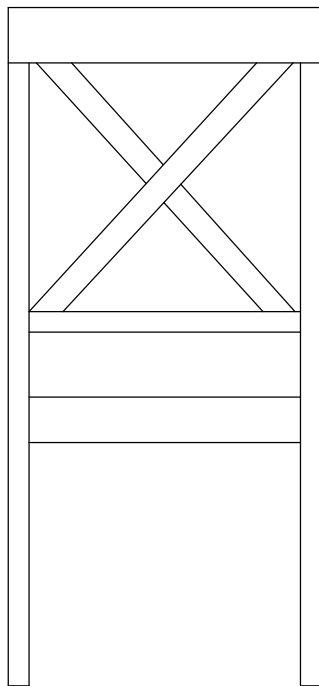


- 3 Seat Support x4
(2.0 x 6.0 x 33.2cm)



- 4 Seat Pad x2
(2.0 x 37.5 x 43.0cm)



- 2 Front Leg x2
(3.5 x 3.5 x 41.0cm)



- 5 Stretcher x4
(1.6 x 2.5 x 34.5cm)







Components - Fittings

If you have damaged or missing components
, call the Customer Helpline :
Argos= 0345 640 0800

Please check you have all the parts listed below


Note : The quantites below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  M6 x 50mm JCBC Bolt x 12	B  Spring Washer x 12	C  M4 x 32mm Wood Screw x 14
D  Allen Key x 1		

Tools required




Ruler/tape
measure



Philips screwdriver

Ruler - Use this ruler to help correctly identify the screws



The screws length is measured from the head to the point (30mm screw shown).

Assembly Instructions

Step 1

Preparing Front Legs

Place front leg **2** face down onto the floor.


Carefully align seat supports **3** onto front leg **2** and secure using fixings **A** and **B**.

Note : Do not fully tighten at this stage.

Locate stretchers **5** into the lower holes in front leg **2** and push firmly into position.

Note : Ensure the fixing holes in stretchers **5** are facing down.

Secure small stretchers using screws **C**.

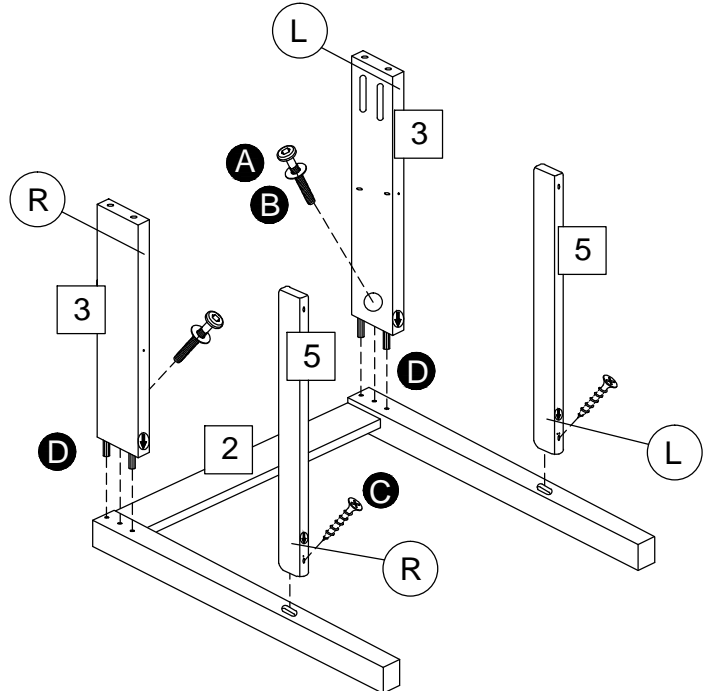

Step 2


Attaching Back rest

Lay back rest **1** flat on the floor with the fixing holes facing up.

Carefully align the seat supports **3** and stretchers **5** with the holes in back rest **1**.

Secure using fixings **A** and **B** for the seat supports and screws **C** for the stretchers **5**.

Note : Do not fully tighten bolts at this stage.

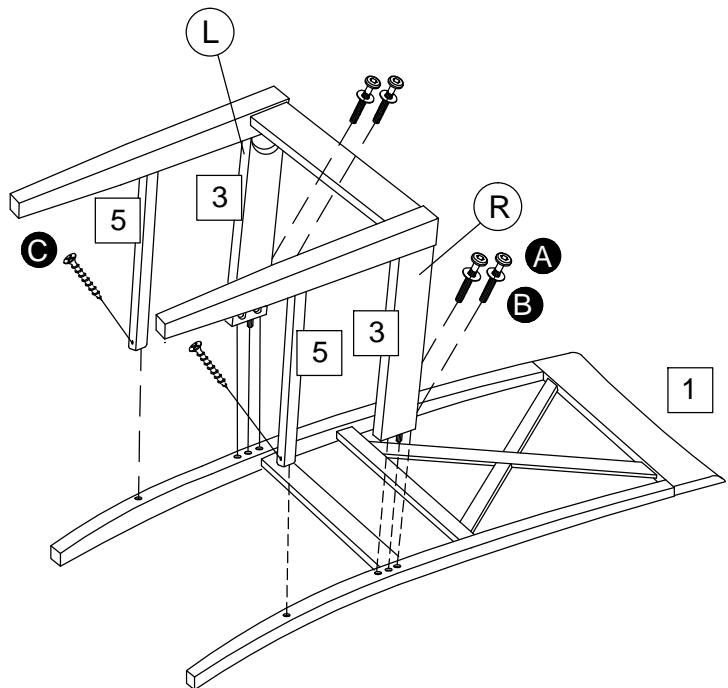

Assembly Instructions

Step 3


Assembling Seat Pad

Place seat pad **4** upside down on a stable flat surface (i.e edge of table).

Turn chair frame upside down and locate onto seat pad **4**.

Adjust chair frame until it is correctly aligned with the seat pad **4**.

Secure using screws **C**.

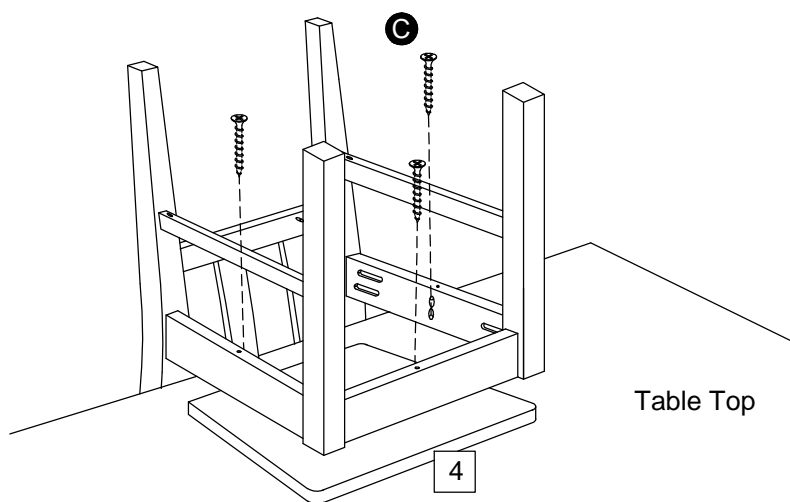


Step 4

Completing Assembly

Turn chair upright and place on a level surface.

Whilst applying a firm downward pressure to the seat, tighten all screws.

Assembly is complete.

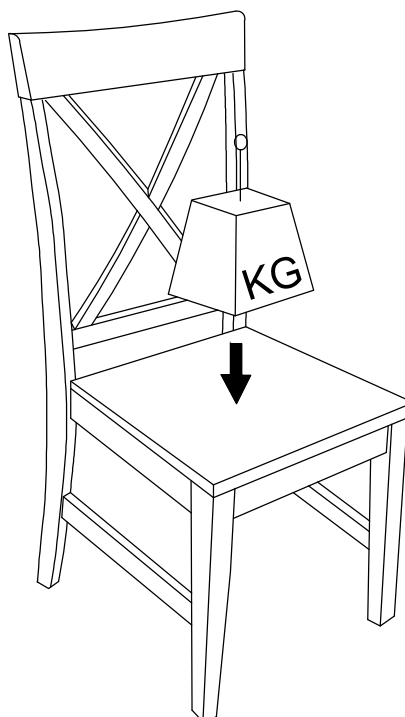

If you need help or have damaged or missing parts, call the **Customer Helpline** :
Argos = 0345 640 0800