


5 Tier Rolling Shoe Rack

Assembly Instructions - Please keep for future reference

455/9447

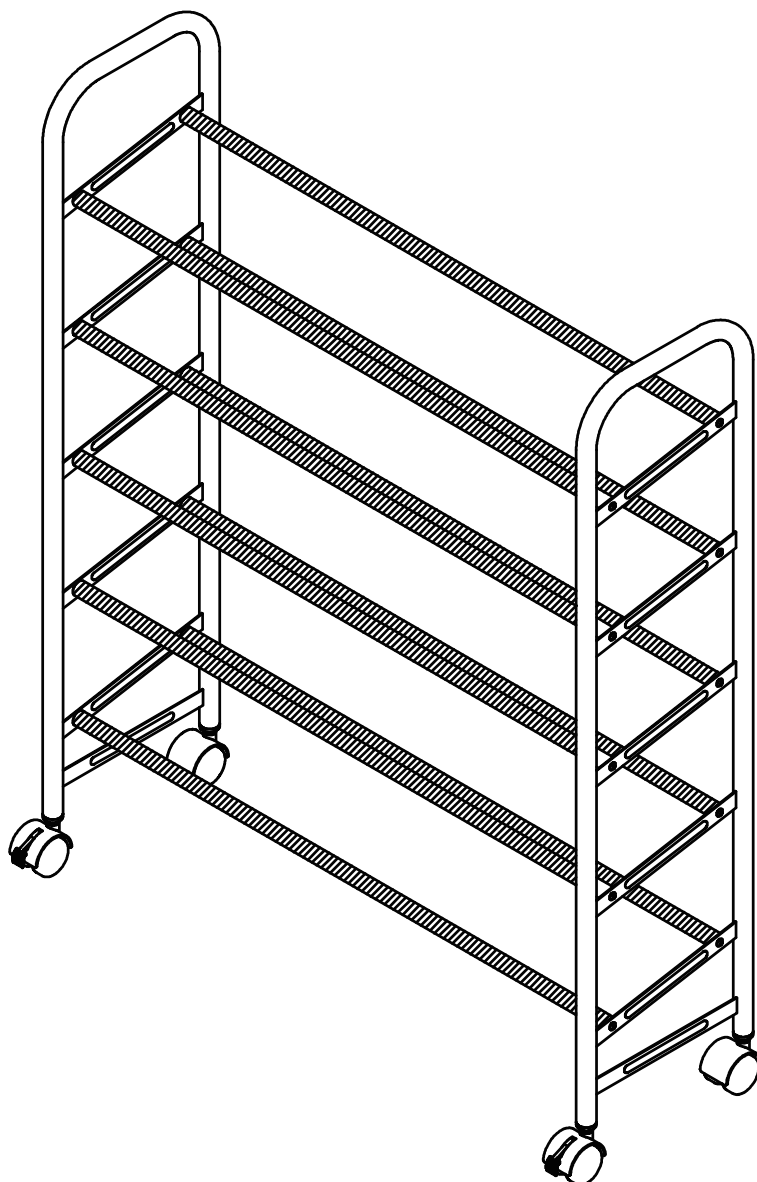

Dimensions

Width - 73cm
Depth - 22.5cm
Height - 89cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightened properly.

Components - Parts

If you have damaged or missing components,
call the **Customer Helpline: 03456 400800**

Please check you have all the fittings listed below




1 Side Frame x 2

2 Black Coated Steel Tube x 10


Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.




Screw x 20



Plastic Insert x 4




Castor with stopper x 2



Regular Castor x 2

Tools required



Screwdriver

Assembly Instructions

Step 1

Connect **2** Black Coated Steel tube with **1** Side Frame using **A** Screw.

Insert **B** Plastic Insert to the bottom of **1** Side Frame and insert **C** Castor with stopper and **D** Regular Castors respectively.

See fig 1.

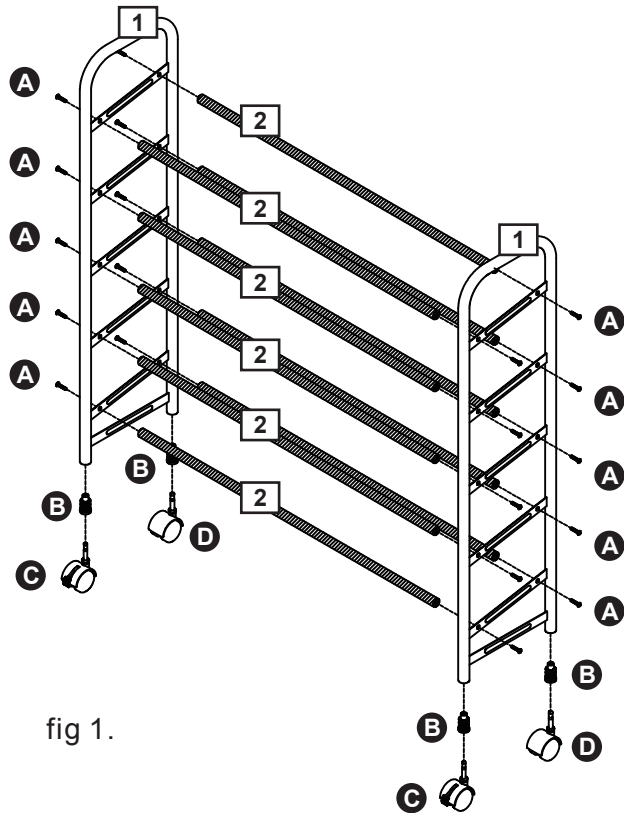


fig 1.

Assembly is complete.

