




5539789

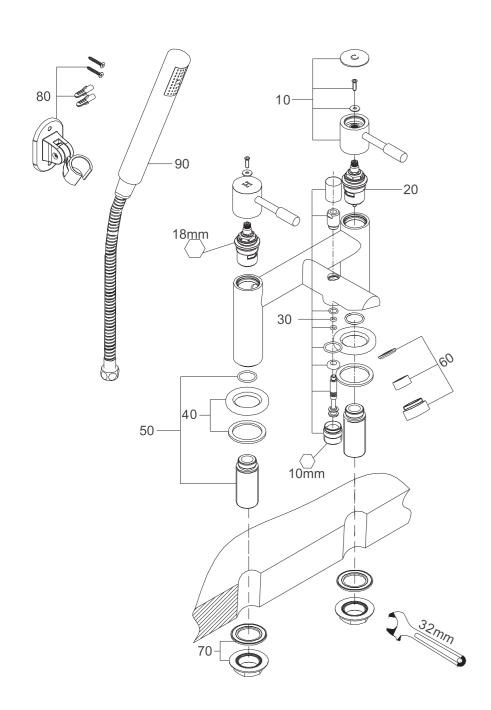

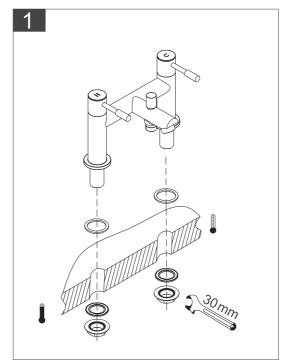






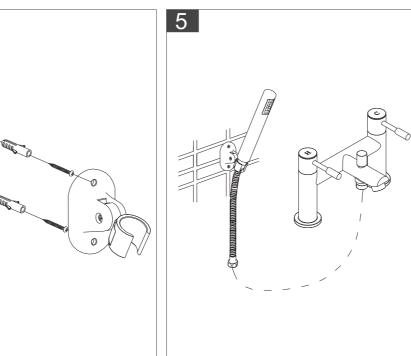

6

Replace the cartridge: remove the (A); revolve screw (B) out with cross screwdriver, remove the spare parts (C); remove the handle set (C); remove the cartridge (E) with monkey wrench and replace it.

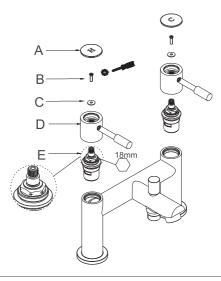

7

Diverter assembly: plug the lift rod (H) into the adapter (I), and insert into the diverter hole; revolve the adapter (J) into the diverter hole with monkey wrench (J); revolve the lift rod knot (K) into the lift rod.

