
# **Assembly Instructions**

**C:** After the sitting test, re - tighten bolts again, if any adjustment needed.

C:

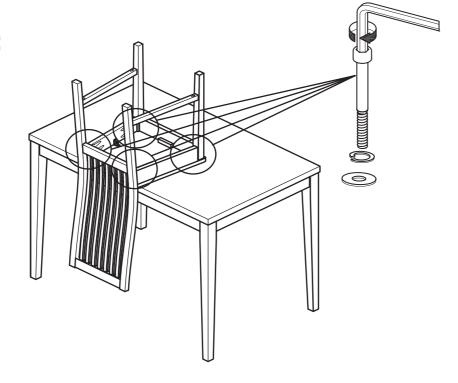


**d:** It is highly recommend to re - tighten all the bolts again after using the chair for 7 days.

**Note**: Please keep the allen key to re - tighten all bolts again when required.

Assembly is complete.

d:

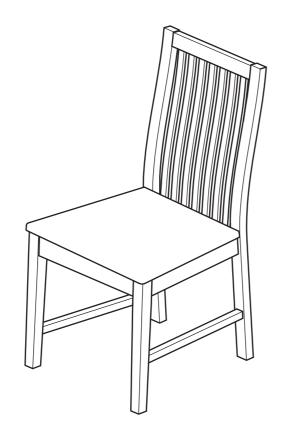


If you need help or have damaged or missing parts, call the **Customer Helpline: Argos = 0345 6400800** 

## Paris Chair

Assembly Instructions - Please keep for future reference

603/7840 603/7857



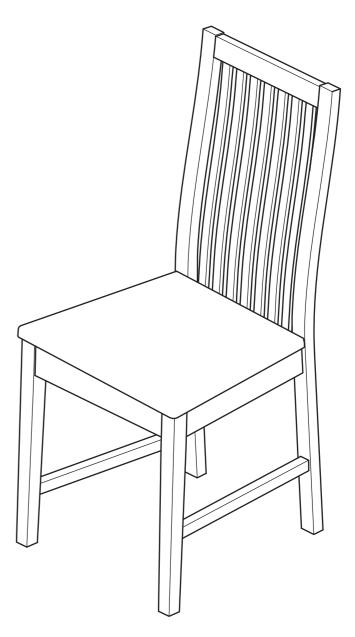

#### **Dimensions**

Width - 47cm Depth - 55cm Height - 96cm

### Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline**: **Argos = 0345 640 0800** 

Issue 1 - 9/08/16



## Safety and Care Advice

### Important - Please read these instructions fully before starting assembly

- · Check you have all the components and tools listed on page 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product during assembly, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.
- Do not stand on the chair.
- Do not use the chair as step ladder



 To reduce the likelihood of damaging your product please ensure that your

power drill is set on a low torque setting.

- Dispose of all packaging carefully and responsibly.
- · Maximum safe weight of user: 110 Kgs.

#### **Care and maintenance**


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

### **Handy Hints**

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.
- Reguraly check and ensure that all bolts and fittings are tightend properly.

## **Assembly Instructions**

e: Screw the lock seats with hand screw driver by following the pre drilled holes.

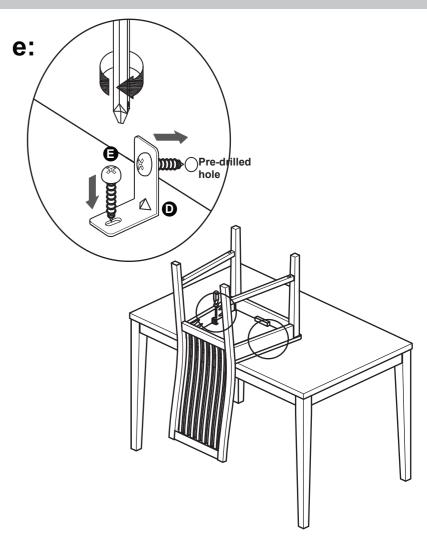


### Step 2

Note: Stand the chair on a level floor.

a: Tighten all bolts.

**b:** Sit on the chair to the legs.

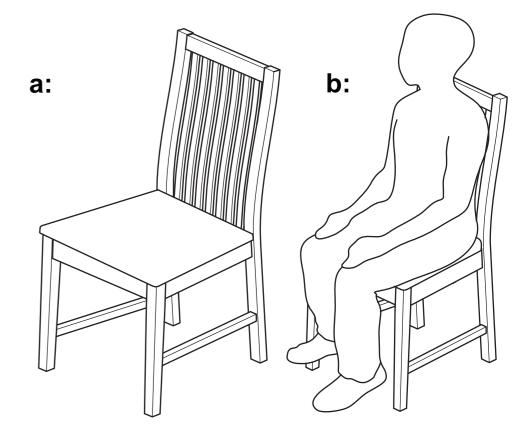


# **Assembly Instructions**

floor. Insert bolts A with spring washers and washers through side rails holes into front leg frame screw all bolts by using ball allenkey G.

**d:** Place the seat pad 2 on the table. Put the chair frame on top of the seat back.

Insert screw into the pre - drilled holes on the righ leg rail and left leg rail rusing a screwdriver.

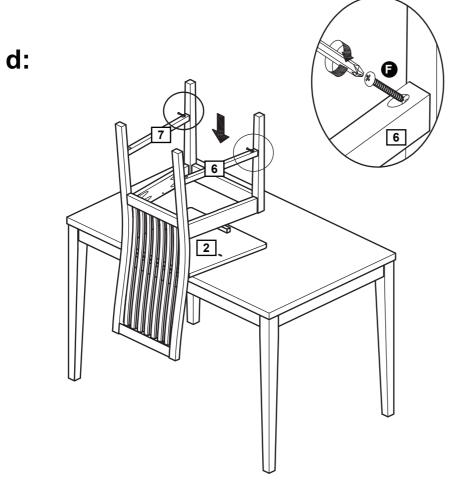


## Components - Parts


If you have damaged or missing components, call the Customer Helpline: Argos = 0345 6400800

### Please check you have all the parts listed below


**Note**: The quantities below are the correct amount to complete the assembly of 1 chair.




1 Chair back x 1




2 Seat x 1




Front leg frame x 1



4 Right side rail x 1



5 Left side rail x 1



6 Right leg rail x 1




7 Left leg rail x 1


## Components - Fittings

### Please check you have all the fittings listed below

**Note**: The quantities below are the correct amount to complete the assembly of 1 chair. In some cases more fittings may be supplied than are required.

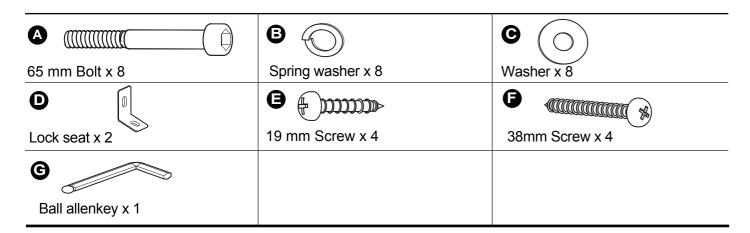

### Tools required



### Ruler - Use this ruler to help correctly identify the screws



## **Assembly Instructions**


### Step 1

a: Put left side rail 5 into left side hole of the chair back 1 and right side rail 4 into right side hole. Insert bolt A with spring washers 3 and washers through side rails holes into the chair backs. Screw all bolts by using ball allenkey 6.

Insert screw into the pre-drilled holes in the right leg rail and left legs rail tighten (although not fully) with a screwdriver.

Do not fully tighten.

**b:**Fit the front leg frame
3 onto the right and left
side rails 4 5 and right
and left leg rails 6 7.

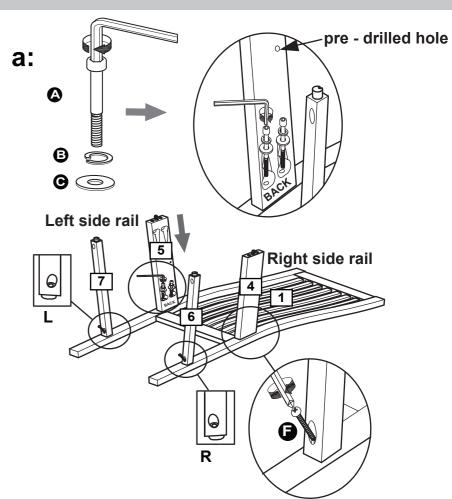

b:

