


Linkable T4 Fluorescent Fitting

Assembly Instruction - Please keep for future reference

432/7394

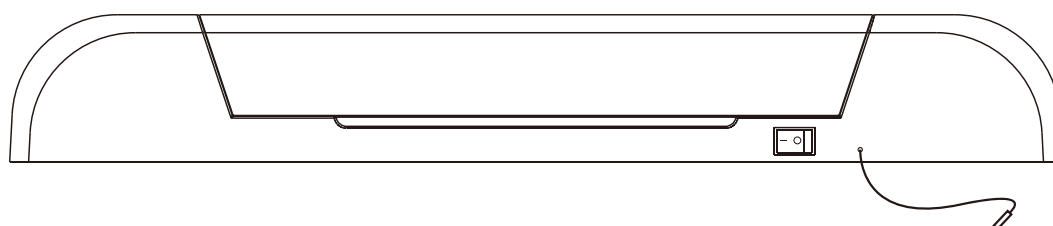

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 0345 640 0800



Important

Our products should not be modified. If any modification is made it will invalidate the warranty and may render the product unsafe.

Fuse value: A light fitting should be connected to a lighting circuit protected by a 5-amp fuse, (or 6-amp residual current device). If a light fitting is to be connected to a ring main, a fused connection unit fitted with a 3-amp fuse should be installed. This product is only suitable for connection to 230V~50 Hz supply and in accordance with Institution of Electrical Engineers (BS 7671) wiring regulations .


Safety


Before commencing installation / maintenance, isolate the mains supply by switching off at the fuse box and removing the relevant fuse to prevent accidental switching on whilst work is in progress.

Shade can become hot in use, allow to cool prior to cleaning or maintenance

Installation Instructions

1. Remove the two screws from the rear of the product.
2. Remove the diffuser by squeezing inwards next to the retaining clips and pulling the diffuser away.
3. Remove the bulb by carefully pulling out.
4. Offer the product to the mounting surface and mark the position of the drill holes. Pre-drill these holes taking care not to foul any pipes or mains cables beneath the surface.
5. Connect the mains supply leads to the terminal block located on the units as follows:

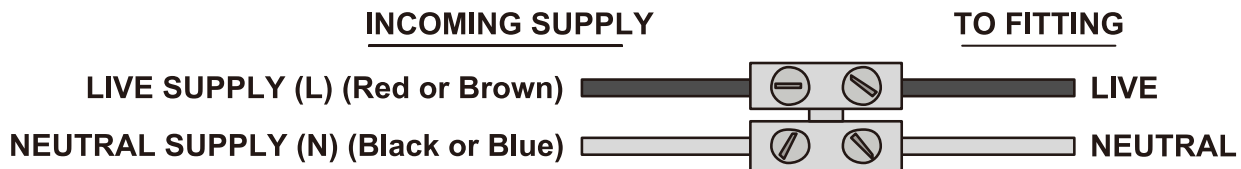

6. N.B. Ensure that the incoming conductors correspond to the labelling of the terminal within the unit. The incoming live supply wire must be opposite the terminal marked L, and the incoming neutral supply wire must be opposite the terminal marked N within the unit.
7. These are double insulated units  and must not be earthed. Earth wires from the house wiring should be connected together within an approved terminal block and wrapped in insulation tape. This is to ensure Earth continuity throughout your property.


8. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.
 9. Fix the unit to the mounting surface using the plugs and screws provided.
 10. Replace the bulb: S15 – 284mm Max. 60W (tungsten) or 3.2W LED Strip lamp.
 11. Replace the diffuser.
 12. This shaver socket light is supplying with 3.2W LED Strip lamp.
- Installation is now complete. Replace the circuit fuse and switch on at the mains to test.

NOTE: THE PRODUCT WILL NOT WORK WITH THE DIFFUSER LENS OFF.

LOCATION OF INSTALLATION

Although this fitting is designed for use in bathrooms, it should not be mounted in a position where it can be easily or excessively splashed with water.

These fittings have no special protection against the ingress of moisture and if they are to be used in a bathroom they are suitable for 'Outside Zone' use only.

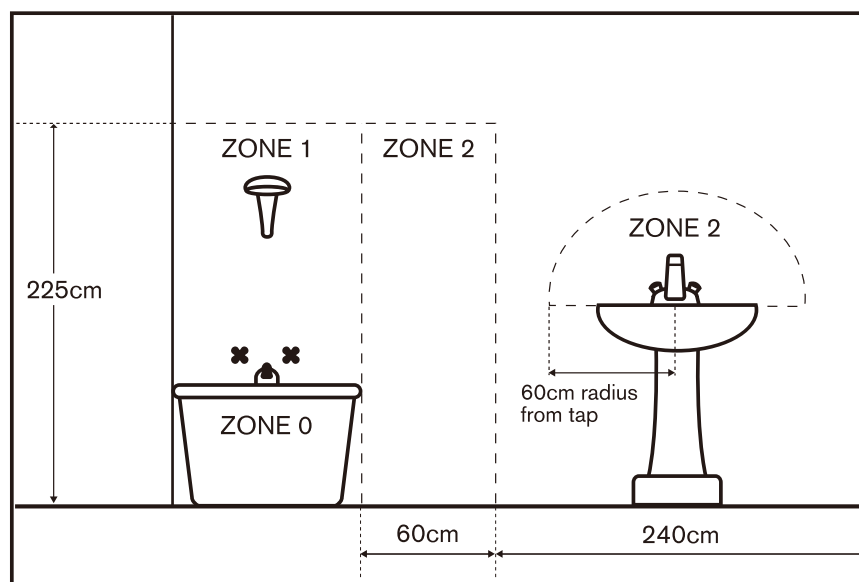


IP20



A Guide to


Wall Mounting & Fixings

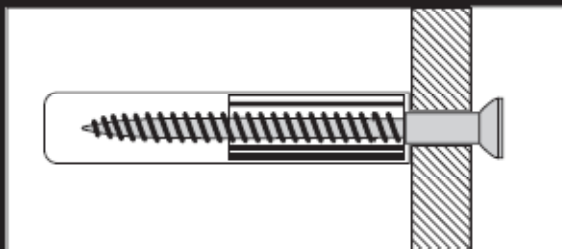

IMPORTANT:

When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


HINTS:

- 1) General Rule  Always use a larger screw and wall plug if you are not sure.
- 2) Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3) Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4) Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
- 5) Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types Of Walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plaster board.

No.1 "Standard" Wall Plug General Wall Materials

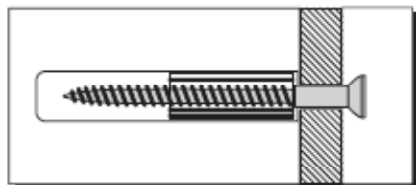


These come in various sizes and are made from plastic or sometimes wood fiber.

No.2 "General Purpose" Wall Plug Aerated / Breeze Block

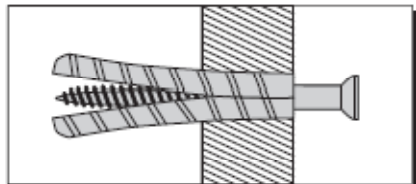


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, a General Purpose Plug can be used.

No.3 "Shield Anchor" Wall Plug Heavy Loads

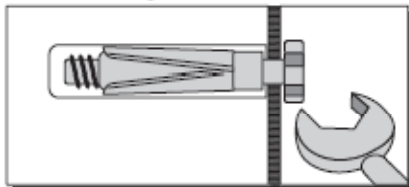


For use with heavier loads such as TV & HiFi Speakers and Satellite Dishes etc.

No.4 "Cavity Fixing" Wall Plug

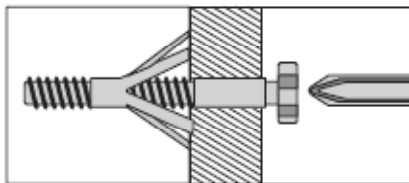


For use with plaster board partitions or hollow wooden doors.

No.5 "Cavity Fixing - Heavy Duty" Wall Plug

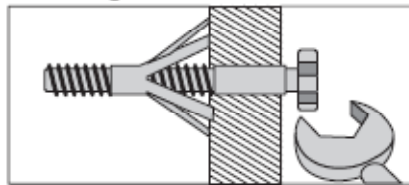

For use when fitting or supporting heavy loads such as shelving, wall cabinets, coat racks.

No.6 "Hammer Fixing" Wall Plug

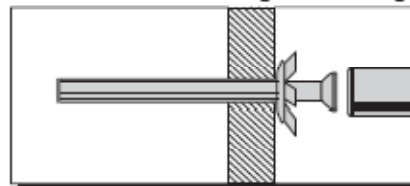

For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall.

CARE & MAINTENANCE

SAFETY

Always check the fitting and location to ensure your safety in and around the home.

FITTING

From time to time check the fitting to ensure the wall plugs or screws do not become loose.