


Challenge Beacon 26in Folding Bike Cross CXF300 26in Folding Bike

Assembly Manual

621/5363
616/2801

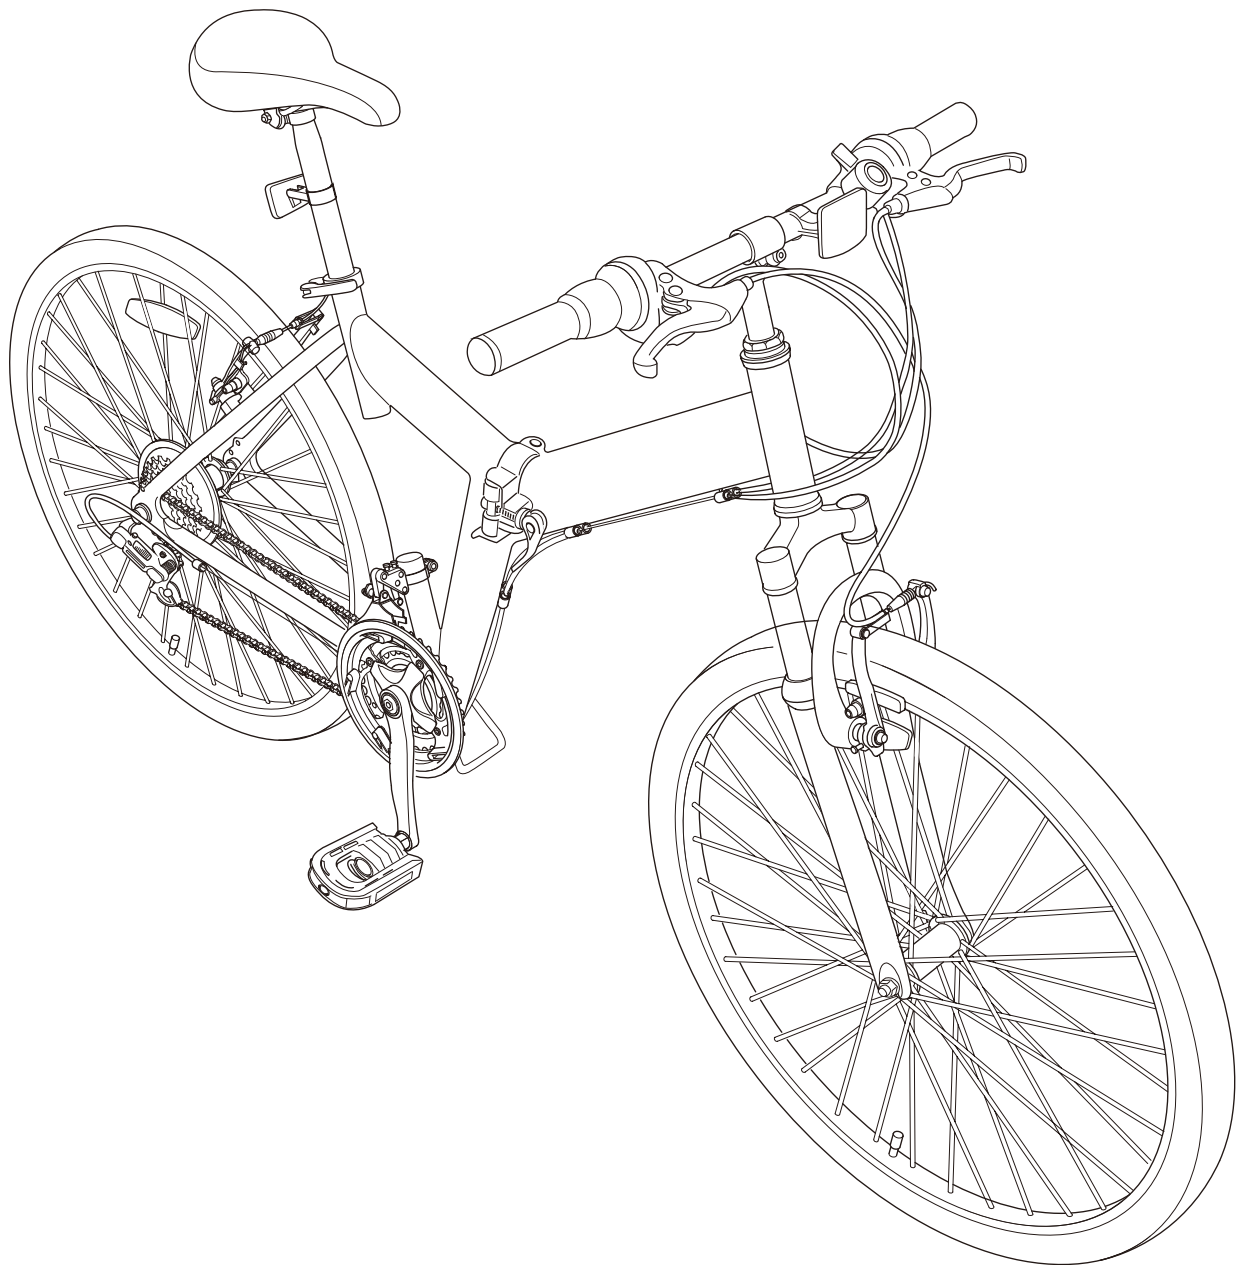

Important – Please read these instructions fully before starting assembly

These instructions contain important information that will help you get the best from your bike, ensuring safe and correct assembly, use and maintenance.
The image in the manual is for instruction reference only.

Contents

Safety Information.....	3
In the Box	5
Parts	5
Tools	5
Assembly	6
Step 1	6
Step 2	7
Step 3	8
Step 4	9
Step 5	10
Step 6	11
Step 7	12
Riding Advice	13
Before Riding	13
Riding in Bad Weather	16
Riding in the Dark	16
Riding Using Personal Music Players	16
Using Child Seats	16

NEED ANY HELP?

**CUSTOMER
CARE HELPLINE
01702 208187**

support@bspokeleisure.co.uk

WE CAN GIVE YOU GUIDANCE ON
ASSEMBLY,PARTS & TECHNICAL ADVICE

Safety Information

Important – Please read these instructions fully before installation



WARNING! This Bike has been designed, assembled and tested in accordance with the EN ISO 4210 to ensure your safety. To make sure the bike remains safe, it should only be used for recreational use. Under no circumstances should it be used for competitive cycling, stunting, jumping or acrobatic manoeuvres. This may result in serious personal injury and damage to the bike.

WARNING! This bike is only suitable for use by riders (including any panniers and/or luggage) with a weight of less than 80 kg (176 lb).

WARNING! Under no circumstances should the bike be ridden with loose or torn clothing.

WARNING! Always take extra care when riding in wet, foggy, windy or icy conditions. The brakes may not be as effective and the braking distances may be increased.

WARNING! When riding in the dark, always make sure that the bike is fitted with suitable reflectors and front and rear lights.

WARNING! When assembling the handlebars and stem to the bike frame, make sure the suspension forks are facing in the correct direction. If the suspension forks are assembled correctly, the brakes should be facing forwards. Failure to observe this warning may prevent the correct operation and may lead to personal injury and damage to the bike.

WARNING! When assembling the handlebars and stem, make sure it is inserted beyond the minimum insert mark. Failure to observe this warning may lead to a potentially unstable bike and may result in serious personal injury.

WARNING! When assembling the seat post, make sure it is inserted beyond the minimum insert mark. Failure to observe this warning may lead to a potentially unstable seat post and may result in serious personal injury.

WARNING! The front and rear tyres of the bike must be fully inflated before attempting to ride the bike. Under no circumstances should the tyres be inflated above the maximum pressure stated on the side of the tyres.

WARNING! Only inflate the front and rear tyres of the bike using a bicycle pump. Do not attempt to use another type of pump to inflate the tyres.

WARNING! Always wear a cycle helmet when riding the bike.

WARNING! The saddle height and handlebars are secure, set to a comfortable riding position and do not exceed the minimum insertion mark. The rider when seated should be able to reach the floor with their tip toes and be able to reach the brakes and handlebars without over balancing.

WARNING! Please be aware of the specific risk of entrapment during normal use and maintenance on the front/rear wheel, chain and sprocket.

WARNING! This bike is not suitable to add bike trailer.

WARNING! The rider shall follow the national legal requirement when use on public roads. (e.g. Lighting and reflectors)

WARNING! Safety critical components should be replaced using genuine replacement parts. This bicycle is not suited for extreme use such as competitions, jumping, drop-offs or stunting. The rider must be aware that intensive use can result in damage to the frame, forks, wheels and other components of the bicycle that may affect its safety.



Safety Information

Important – Please read these instructions fully before assembly



CAUTION! The safety and smooth running of the bike can only be preserved with regular maintenance. Always ensure the bike is maintained in accordance with the supplied maintenance manual.

CAUTION! Only use suitable tools to assemble the bike. The use of unsuitable tools may lead to personal injury and damage to the bike.

CAUTION! Always ensure all packaging is removed from the bike before assembly and use. Failure to remove the packaging may prevent the correct operation and may lead to personal injury and damage to the bike.

CAUTION! When assembling the bike frame, make sure all the cables are free to move and are not tangled. Failure to observe this caution may prevent correct operation and may lead to personal injury and damage to the bike.



IMPORTANT! Always take care when removing the packaging to prevent damage to the bike.

IMPORTANT! Before assembling the bike, check all the parts indicated in the manual are in the box. Inspect the parts for signs of damage. Do not assemble the bike if you observe any damaged components.



NOTE! The threads on the left and right pedals are different. To prevent damage to the threads, only tighten the pedals in the direction indicated on the stickers.

NOTE! Always recycle the packaging in accordance with local recycling schemes.

NOTE! The pedals and crank arms have colour coded stickers to indicate which pedal matches which Crank Arm.


NOTE! Locate the 'direction of rotation' arrow embossed on the side of the tyre. When the front wheel is assembled, the arrow should be pointing in the direction that the wheel will rotate.

Recommended tightening information:

Part	Torque (Nm)
Front Wheel Nuts	22-25 Nm
Rear Wheel Nuts	25-29 Nm
Handlebar Clamp Nuts	16-18 Nm
Stem Bolt	18-20 Nm
Seat Clamp Bolt or Nuts	16-18 Nm
Seat Post Clamp Allen Bolt	8-10 Nm
Brake Cable Pinch Bolt	6-8 Nm
Crank Bolt or Nut	45 Nm
Pedals	40-45 Nm
Quick Release	Tight Enough to Secure (150-200N)
V-Brake Brake Blocks	8-10 Nm

In the Box

Parts

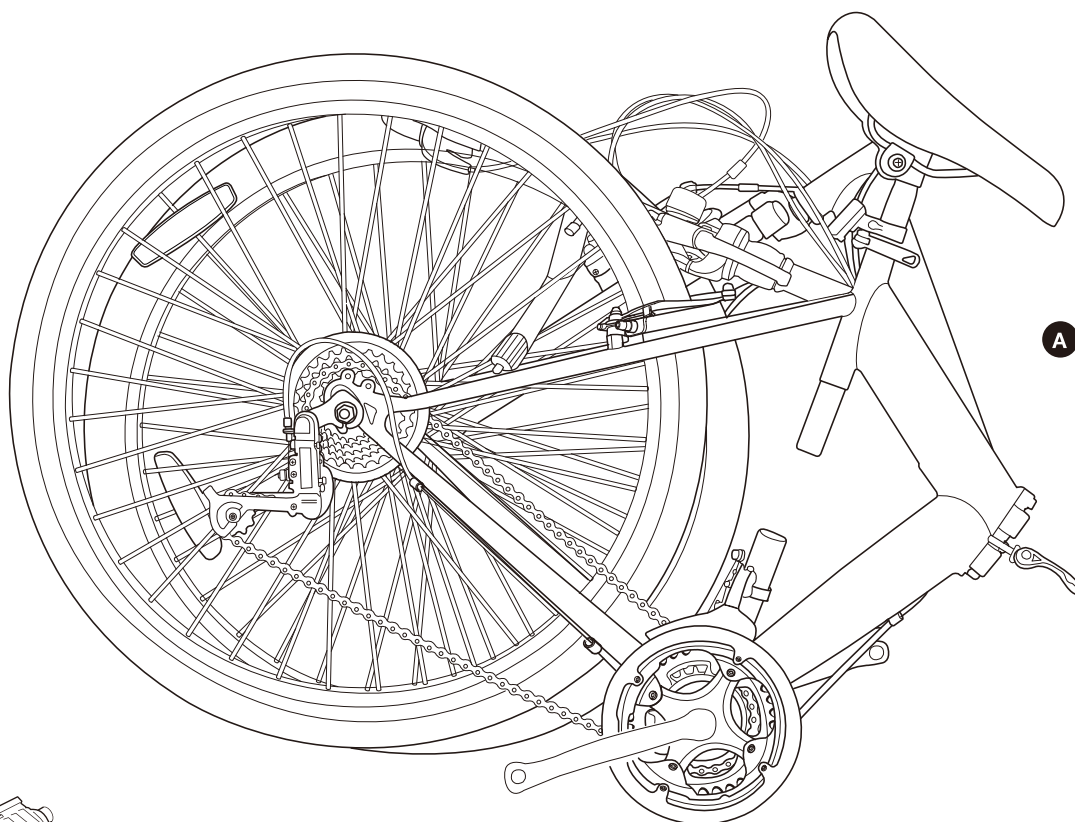


E




A Bike(Supplied with handlebar and stem apart)

E Pedals (supplied in separate box)

Tools



Multitool (supplied in separate box)



Hexagonal key (supplied in separate box)

Assembly

Step 1



IMPORTANT! Before assembling the bike, check all the parts indicated in the manual are in the box. Inspect the parts for signs of damage. Do not assemble the bike if you observe any damaged components.

IMPORTANT! Always take care when removing the packaging to prevent damage to the bike.

1. Remove the bike from the box and carefully remove all packaging. The following types of packaging are used to protect the bike during transit:
 - Cardboard Wrapping - This is used to protect the painted surfaces of the bike frame.
 - Cable Ties - These are used to secure loose parts to the partially assembled bike.
 - Stem Caps - These are placed in unprotected ends of the bike frame.




NOTE! Always recycle the packaging in accordance with local recycling schemes.


Assembly

Step 2


2a

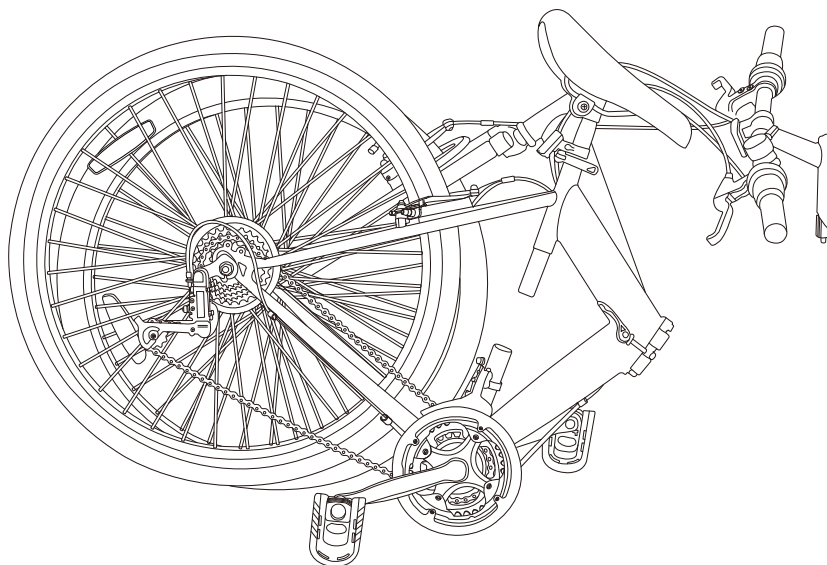


2b

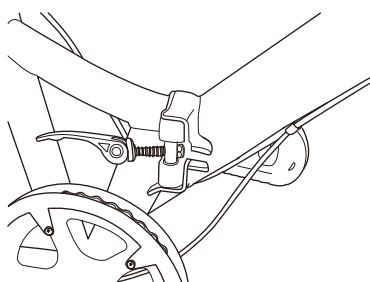

2c

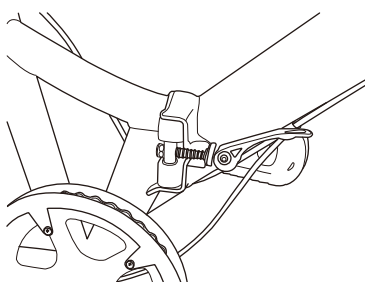

2d

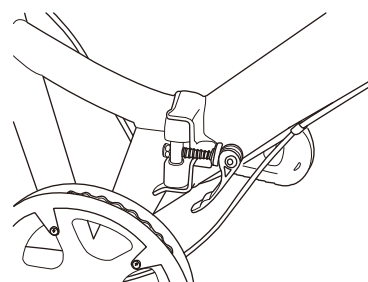

To assemble the frame

2a. When assemble the bike, pls careful not to pinch fingers and cables.

2b. Pull up on mechanism to release the safety pin.

2c. Swing the quick release assembly forward.

2d. Tighten the quick release mechanism.




WARNING! Reverse the steps of the folding procedure. Be sure to tighten all quick release and engage safety pins. If there is any play in the hinges check these components. Be careful to avoid pinching fingers and cables.

Assembly

Step 3

3a

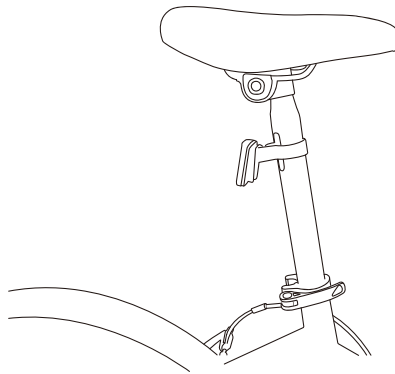

To upper the saddle

- Loose the quick release mechanism
- Upper the saddle to safety mark
- Tighten the quick release mechanism




WARNING! When upper the saddle, make sure the seat post is inserted beyond the minimum insert mark. Failure to observe this warning may lead to a potentially unstable seat post and may result in serious personal injury.

ATTENTION!!! IF THIS BICYCLE USES A Q/R (QUICK RELEASE) SEAT POST CLAMP

PLEASE READ AND FOLLOW INSTRUCTIONS CAREFULLY

COLOR / STYLE OF Q/R MAY VARY PER MODEL AS REFERENCE PICTURES SHOWN

STEP 1 QUICK RELEASE SEAT POST CLAMP

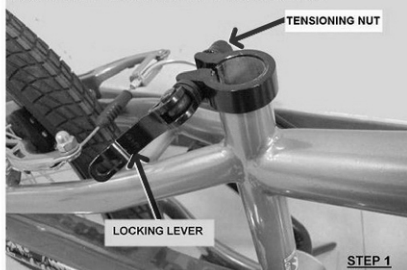


YOUR BICYCLE WILL HAVE A QUICK RELEASE CLAMP INSTALLED FROM FACTORY

STEP 2



THE QUICK RELEASE CLAMP IS MARKED OPEN & CLOSED. WHEN IN OPEN POSITION, SEAT POST CAN BE INSERTED INTO THE FRAME TO THE DESIRED HEIGHT POSITION

STEP 3

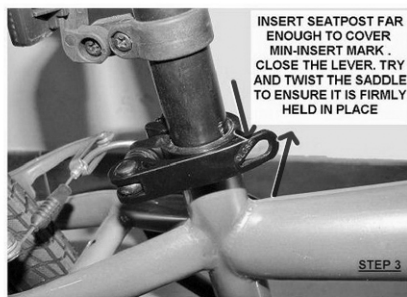

AFTER SEATPOST IS INSERTED, YOU MUST FLIP THE LEVER TO THE CLOSED POSITION

PLEASE NOTE: THE LEVER WILL NOT FUNCTION PROPERLY, IF IT IS SCREWED SHUT, IT MUST BE FLIPPED OVER FROM OPEN TO CLOSE POSITION

STEP 4




IF THE SEATPOST / SADDLE IS NOT SECURE ENOUGH, FLIP LEVER TO OPEN POSITION AND SLIGHTLY TIGHTEN ADJUSTING NUT AND FLIP LEVER TO CLOSE POSITION AND CHECK. REPEAT UNTIL SEATPOST IS VERY SECURE. AS A GUIDE THERE SHOULD BE ENOUGH TENSION TO MAKE LEVER HARD TO FLIP CLOSED

Assembly

Step 4

4a & 4b

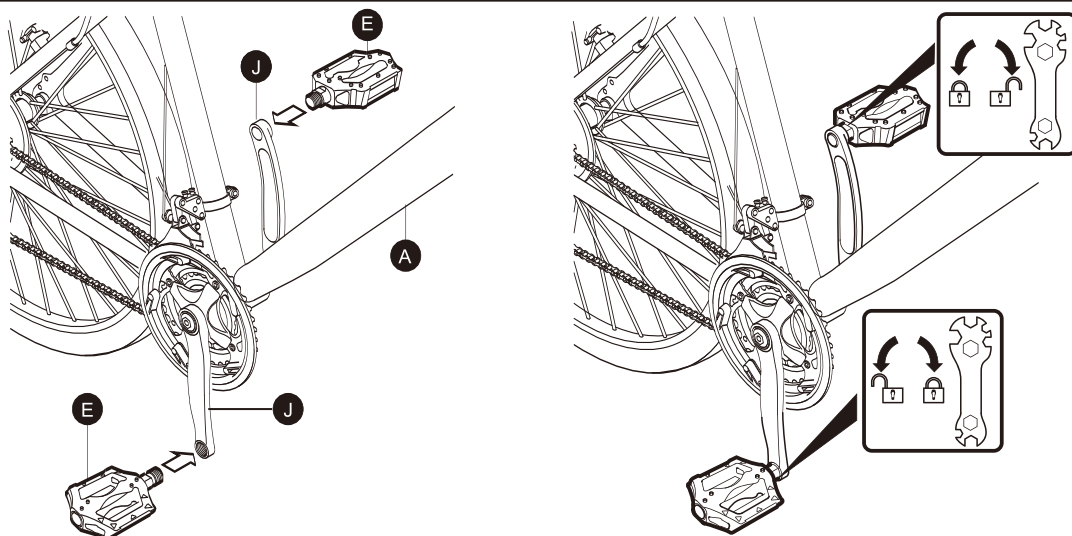

NOTE

NOTE! The pedals **E** and crank arms **J** have colour coded stickers to indicate which pedal **E** matches which crank arm **J**.

NOTE! The threads on the left and right pedals are different. To prevent damage to the threads, only tighten the pedals in the direction indicated on the stickers.

4a Fitting the Right Hand Pedal

Locate the right hand pedal **E**. This will have a blue sticker attached, note: turn clockwise to tighten.

Locate the right hand crank arm **J** on the bike **A**. This will also have a blue sticker attached.

Remove the sticker from the right hand pedal **E**.

Insert the threaded shaft of the right hand pedal **E** into the threaded hole of the right hand crank arm **J** and fully tighten in the direction indicated on the stickers using the multitool supplied.

4b Fitting the Left Hand Pedal



Locate the left hand pedal **E**. This will have a red sticker attached, note: turn anti-clockwise to tighten.

Locate the left hand crank arm **J** on the bike **A**. This will also have a red sticker attached.

Remove the sticker from the left hand pedal **E**.

Insert the threaded shaft of the left hand pedal **E** into the threaded hole of the right hand crank arm **J** and fully tighten in the direction indicated on the stickers using the multitool supplied.

4a & 4b Adjuster

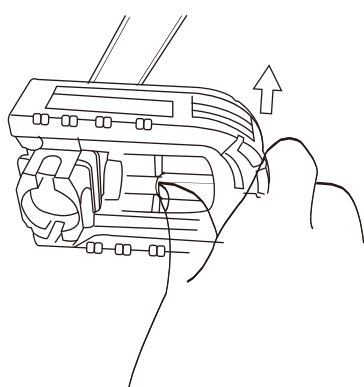

Unfold the pedals

Place finger on the "adjuster" up the pedal

Push in the direction of the crank on the "adjuster"


Unfold the pedal down

Repeat for other pedal



Assembly

Step 5


5a

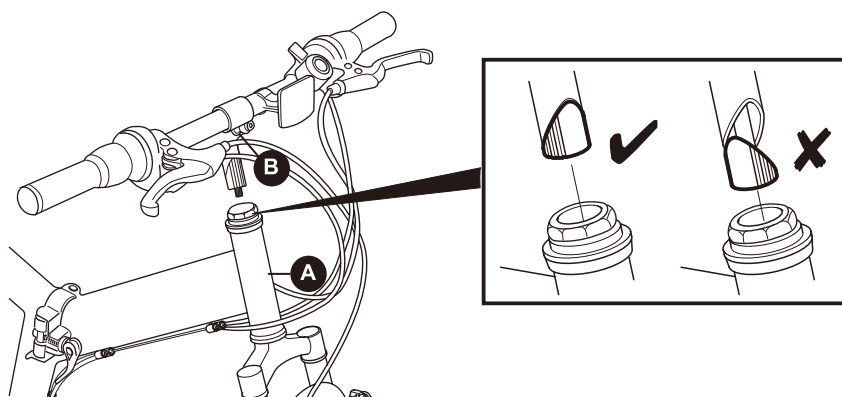

5b

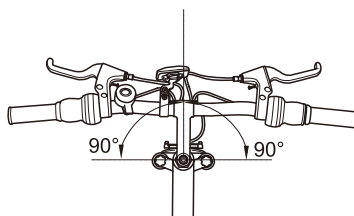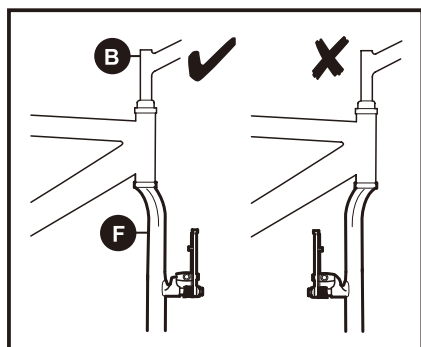

5c



5a Insert the Stem



WARNING! When assembling the handlebars and stem, make sure it is inserted beyond the minimum insert mark. Failure to observe this warning may lead to a potentially unstable bike and may result in serious personal injury.

Ensuring the wedge nut is correctly aligned, insert the lower end of the handlebars and stem **B** into the steer tube of the bike **A**.

5b Align the Stem



WARNING! When assembling the handlebars and stem to the bike frame, make sure the forks are facing in the correct direction. If the forks are assembled correctly, the brakes should be facing forwards. Failure to observe this warning may prevent the correct operation of the bike and may lead to personal injury and damage to the bike.

Adjust the handlebars and stem **B** to the desired height and align with the forks **F**. The forks must be facing in the right direction as shown.

5c Securing the Stem


Using the supplied hexagonal key, tighten the stem bolt firmly.

The Left Gear Shifter operates the Front Gears which are attached to the cranks (pedal arms).
The Left Brake Lever operates the Rear Brake.
The Right Gear Shifter operates the Rear Gears.
The Right Brake Lever operates the Front Brake.

Assembly

Step 6

6

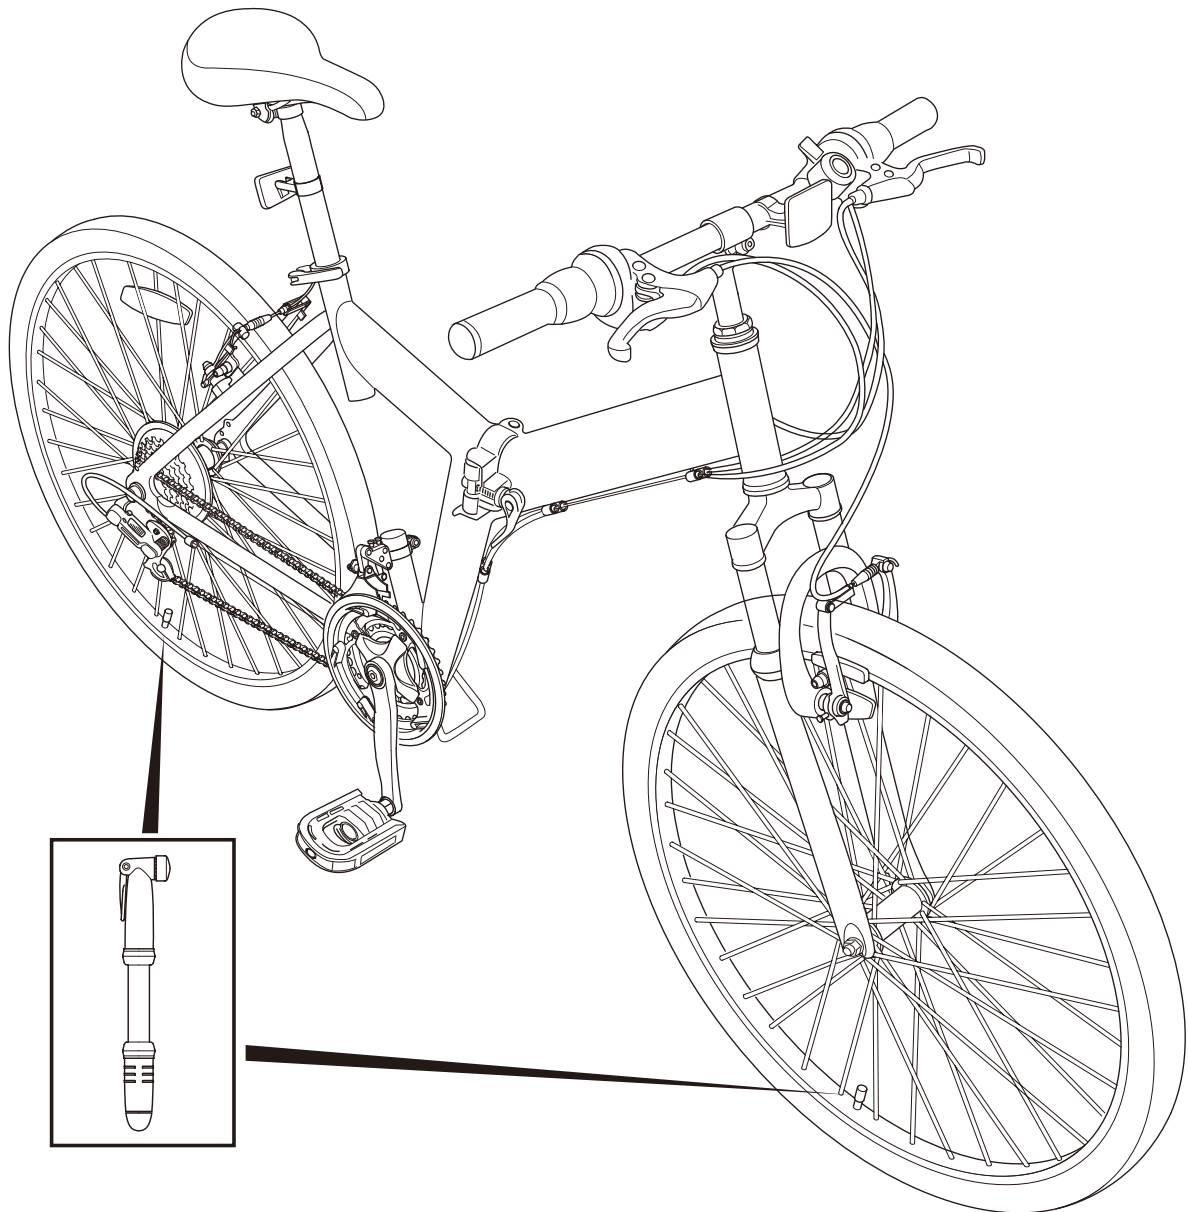

6 Inflate the Front and Rear Tyres




WARNING! The front and rear tyres of the bike must be fully inflated before attempting to ride the bike. Under no circumstances should the tyres be inflated above the maximum pressure stated on the side of the tyres.

WARNING! Only inflate the front and rear tyres of the bike using a bicycle pump. Do not attempt to use another type of pump to inflate the tyres.

Before riding the bike, the front and rear tyres must be fully inflated to the pressures indicated on the side of the tyre.

Assembly

Step 7

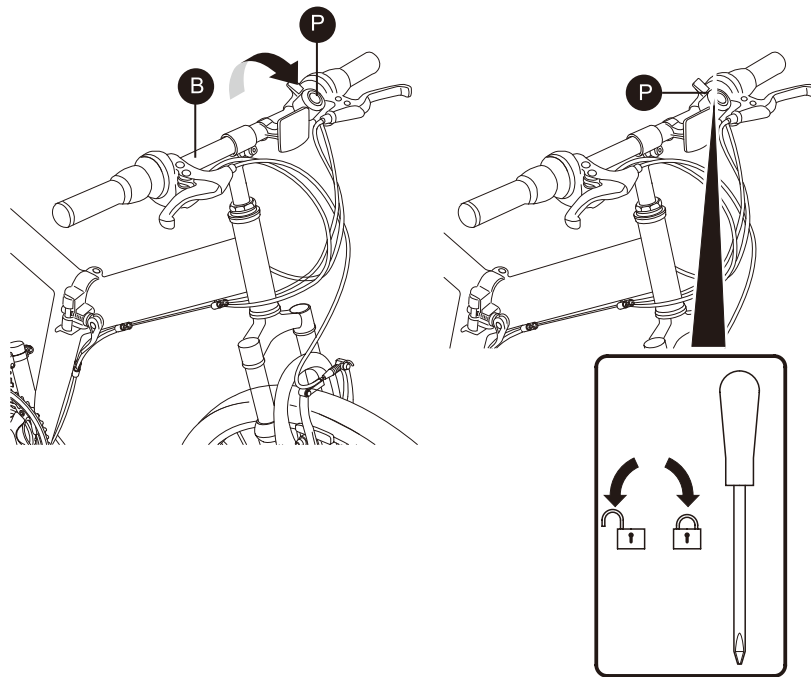

7 Position the Bell

Rotate the bell **P** so it is upright and position it along the length of the handlebars **B**. You must be able to operate the bell **P** without removing your hand from the handlebars.

Using a suitable screwdriver, tighten the retaining screw at the bottom of the bell **P**.

The Bike is now fully assembled and ready to ride.

Riding Advice

Before Riding

You should perform the following checks before riding your bike to ensure it is safe to use and operating correctly.

1. Is the Saddle Secure?

While standing next to the bike, try and move the saddle from side to side. If the saddle moves you should retighten the seat post bolt or the saddle clamp bolts.

2. Are the Front and Rear Tyres Inflated Correctly?

Squeeze the sides of the front and rear tyres. If they are soft they will need inflating. Re-inflate to the pressure indicated on the sides of the tyres using an approved bicycle pump.

3. Are the Pedals Tight?

Using the supplied multitool, ensure both the left and right pedals are fully tight. Remember that the threaded shafts of the left and right pedals tighten in different directions.

4. Do the Brakes Work?

Stand next to the bike and apply the front brake and push forwards. If the wheels move, the front brake may not be working correctly. If required, adjust the front brake as described in the Maintenance Manual.

Repeat the above check for the rear brake.

5. Do the Handlebars Move?


Hold the front wheel between your legs to see if handlebars move left to right! If the handlebars move, the stem bolt may have become loose. Retighten the stem bolt.

6. Is the Bike Clean?

The bike should be cleaned and re-oiled regularly to ensure it operates correctly.

Riding Advice

Before Riding

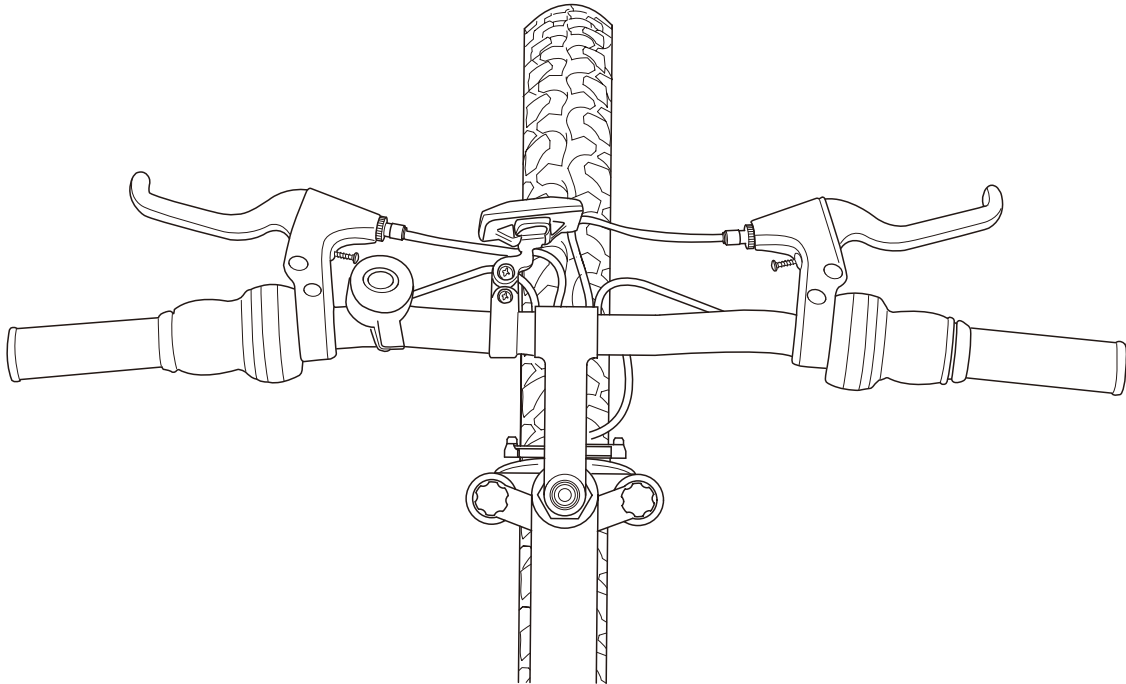

The bike is fitted with 6 gears to allow you to ride efficiently on all types of surfaces and gradients.

The gears are operated using one twist shifter mounted on the handlebars next to the brake levers. The right hand twist shifter operates the six rear gears. The currently selected gear number is shown on the gear indicator for each twist shifter.

1. Operating the Front Gears

To select a lower gear (larger), firmly turning the left hand twist shifter.

To select a higher gear (smaller), firmly turning the left hand twist shifter.

2. Operating the Rear Gears

To select a lower gear (larger), firmly turning the right hand twist shifter.

To select a higher gear (smaller), firmly turning the right hand twist shifter.

3. Riding Up Hill

When riding up hill, you should select a lower rear gear (for example number 1) and a lower front gear (for example number 1).

4. Riding Down Hill

When riding down hill, you should select a higher rear gear (for example number 7) and a higher front gear (for example number 3).

Riding Advice

Before Riding


OWNER'S MANUAL FOR FOLDING BIKE

- BEFORE YOU RIDE, YOU MUST READ THE OWNER'S MANUAL



Adjust the Seat Height:

- A. Open the quick-release lever.
- B. Slide the seat post upwards to the desired height.
- C. Close the quick release lever.




Unfold the Pedals:

- A. With the use of your thumb and forefinger, release the pedal locking mechanism
- B. Fold the pedal into the normal riding position




Be sure to check all parts and components are secure and assembled correctly before riding the cycle.


FOLDING PROCEDURE IS IN REVERSE OF ASSEMBLY PROCEDURE
(1-2-3)



Close folding device



Swing folding lever forward



Close folding lever by push up



Check the folding device is locked in the correct position before you ride.




Be careful not to trap your fingers in the hinge of the folding bike.



Ensure the seat post is inserted at least to the minimum insertion mark

WARNING! MAKE SURE BRAKES ARE NOT TANGLED

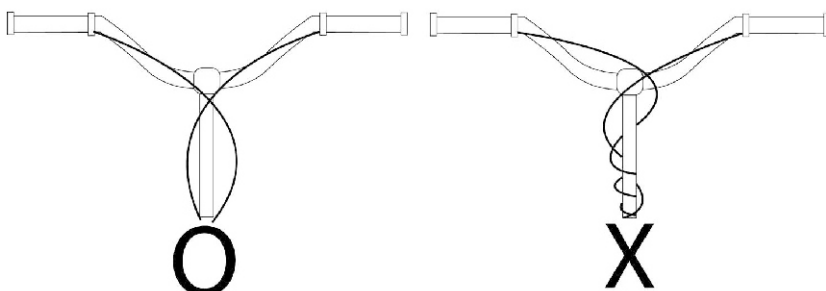


PROPER CONDITION

ENTANGLED CONDITION

CHECK THE BRAKE AND SHIFTER CABLE IS IN PROPER WORKING ORDER, NOT ENTANGLED.
FAILURE TO DO SO COULD CAUSE BRAKES TO WORK INCORRECTLY!


WARNING! CHECK THAT THE FRONT FORK IS IN THE CORRECT DIRECTION AS SHOWN BELOW.

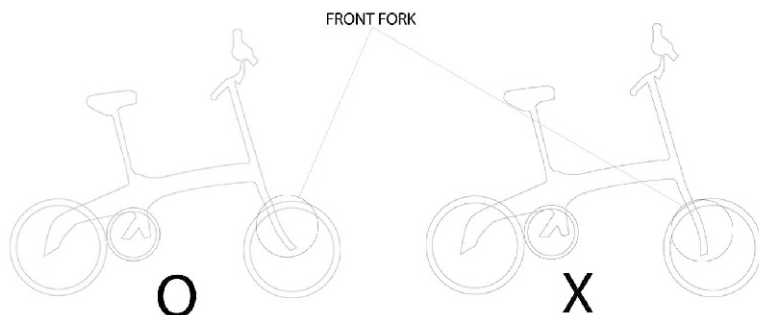

PROPER CONDITION

WRONG CONDITION


WARNING!
EACH TIME YOU RIDE YOUR BIKE CHECK THE
LOCKING LEVER IS SECURELY LOCKED.



LOCKED

OPEN

CHECK THIS IS SECURE BEFORE RIDING
YOUR CYCLE



CORRECT

WRONG

Riding Advice

Riding in Bad Weather



WARNING! Always take extra care when riding in wet, foggy, windy or icy conditions. The brakes may not be as effective and the braking distances may be increased.

When riding in bad weather i.e. wet, foggy, windy or icy, always wear bright, reflective clothing which is warm and waterproof.

You should always give other road users clear signals in plenty of time particularly when approaching junctions. Always brake earlier than you would in the dry as the required braking distance will be increased.

Be aware that all types of surface become greasy or slippery in bad weather. Do not turn or brake suddenly.

Riding in the Dark



WARNING! When riding in the dark, always make sure that the bike is fitted with suitable reflectors and front and rear lights.

It is essential that other road users can clearly see you when riding in the dark. Always wear bright, reflective clothing. Suitable reflectors should be fitted to the front and rear of the bike and if possible the wheels. A white light must be fitted to the front of the bike and a red light at the rear.

Before starting any journey in the dark or even twilight, ensure the lights are working correctly and are turned on.

Clean lights and reflectors regularly and make sure they can be seen from a distance.

Riding Using Personal Music Players

It is recommended that personal music players are not used while riding a bike. These devices prevent you from hearing approaching vehicles and may prove to be a distraction and cause accident.

Using Child Seats

If a child seat is fitted to the bike, make sure the child remains calm at all times. Take time to check that the child's arms, feet and clothing cannot be trapped in moving parts such as the wheels and gears.

The child seat must be installed in accordance with the manufacturer's information and should make sure any fitted accessories (like child seat) does not inhibit the functions of the bike (especially rear brakes) must verify all brakes and gears function properly.