

CHROME BATHROOM IP44 CEILING FLUSH

FIXING INSTRUCTIONS

Thank you for buying this quality light fitting. Please read these instructions carefully prior to installation and retain them for future reference.

THIS PRODUCT CAN NOT BE USED FOR RECESSED MOUNTING. IT IS ONLY SUITABLE FOR CEILING MOUNTING.

This product is only suitable for connection to a 220-240V- 50Hz supply and in accordance with I.E.E. Wiring Regulations.

If in doubt we recommend you consult a qualified electrician

IMPORTANT

Our product should not be modified. If any modification is made it will invalidate the warranty and may render the product unsafe.

Fuse value: A light fitting should be connected to a lighting circuit protected by a 5-amp fuse (or 6-amp residual current device). If a light fitting is to be connected to a ring main, a fused connection unit fitted with a 3-amp fuse should be installed.

 The minimum distance from the lit surface or other illuminated objects is 0.5m (50cm)

SAFETY

Before commencing installation / maintenance, isolate the mains supply by switching off at the fuse box and removing the relevant fuse to prevent accidental switching on whilst work is in progress.


Warning, This product contains glass parts, care must be taken when fitting or handling these parts to prevent personal injury, or damage to the product.

Shade and bulb can become hot in use, allow to cool prior to adjustment, cleaning or maintenance.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH NATIONAL BUILDING REGULATIONS.

INSTALLATION INSTRUCTIONS

1. Please note: you may need assistance to support the unit while fixing it to the surface and connecting to the supply.
2. Offer the Back plate to the mounting surface and mark the position of the drill holes. Pre-drill these holes taking care not to foul any pipes or mains cables beneath the surface.
3. Insert the Plastic wall plugs (supplied) into the holes.
4. Pass the cable through the rear of the Back Plate.
5. Securely fasten the back plate onto the ceiling using suitable screws and wall plugs, (supplied), Ensure that you do not trap or strain any cables between the mounting surface and the back plate.
6. Insert the Heat Sleeving over all incoming cables. **Ensure the Heat sleeving covers the cables from main cable insulator to lampholder contacts.**
7. Strip back 7mm of Insulator and connect the wires into the rear of the Lampholder by inserting the bare conductor cable into the two holes and tightening the grub screws, and connect the Earth to the Earth screw, (See Diagram below to ensure cables are in the correct terminals)

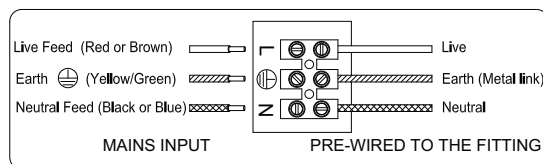


Ensure that the incoming mains cables correspond to the labelled on the terminal block. The incoming live supply wire must be opposite the terminal marked L, and the incoming neutral supply wire must be opposite the terminal marked N. This fitting MUST be earthed. Ensure that the incoming Earth.

8. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.
9. Fit the bulb(not included): **1 x Max. 21W 2D GR10q Base**

10. Secure the glass shade onto the back plate using the three retaining screws. **Please note: DO NOT TIGHTEN THE THREE RETAINING SCREWS TOO FIRMLY.**


11. Installation is now complete. Replace the circuit fuse and switch on at the mains to test.

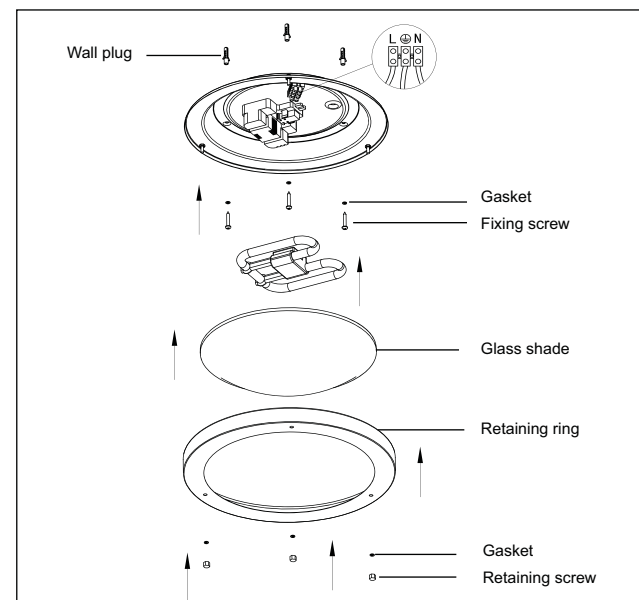


BULB REPLACEMENT

1. Switch off the mains power supply.
2. Before replacing the bulb, allow it to cool down for at least 10 minutes.
3. Never touch the bulb with your fingers directly, cover it with a cloth.
4. Remove the glass shade from the fitting by unscrewing the three retaining screws.
5. Loosen the bulb and remove it from the lamp.
6. Replace a new bulb with same voltage and wattage.
7. Replace the shade.

NOTES

 WASTE ELECTRICAL PRODUCTS SHOULD NOT BE DISPOSED OF WITH HOUSEHOLD WASTE. PLEASE RECYCLE WHERE FACILITIES EXIST. CHECK WITH YOUR LOCAL AUTHORITY FOR RECYCLING ADVICE.

IP44 This fitting is Rated IP44. This means the fitting can be installed in Bathroom Zones 2 and the outside of the Zones, not for Zones 0 or 1.



Please note:
This is a guide for household use.
Please consult a qualified electrician
for further assistance

Model No. : CLM102-DD21
Input Voltage : 220-240V ~ 50Hz
Max.Wattage : 21W

Bulb : 1 x Max. 21W 2D GR10q Base
Argos Limited, Averbury, 489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, MK9 2NW

 **IP44** 