
# Hygena Insert Floor Cabinet

Assembly Instructions – Please keep for future reference

833/4455

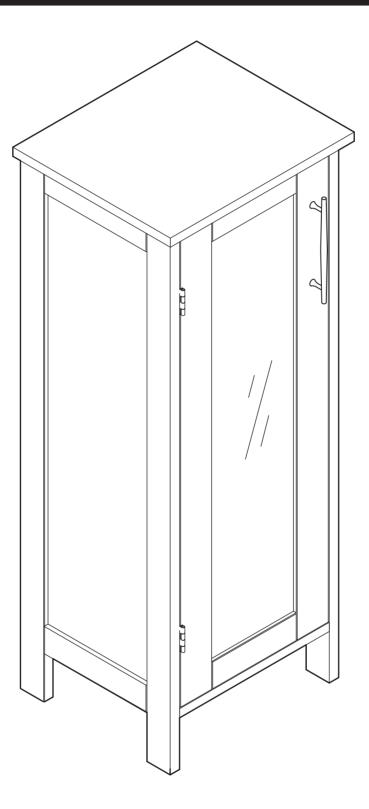

Dimensions

Width - 35cm Depth - 30cm Height - 90cm

### Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



## Safety and care advice

### Important - Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the panels, this could cause damage.

• Assemble the unit as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• *Note:* Only apply the glue once you are sure of the assembly.

• The wall plugs supplied are suitable for solid walls only. It is important that the correct type of fixing is used for your wall, seek professional advice if in doubt.

- Parts of the assembly will be easier with 2 people.
- If using power tools, please follow the safety instructions supplied with the tools.



• We do not recommend the use of power drill/ drivers for inserting screws, as this could damage

the unit. Only use hand screwdrivers.

• *Warning:* Before drilling, check the wall for hidden pipes and cables.

• Dispose of all packaging carefully and responsibly.

#### Glue safety - Take care when using glue, please follow the advice below

**Skin contact:** Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking. **Eye contact:** Rinse immediately with clean water for 15 minutes and seek medical advice.

**If swallowed:** Seek medical advice immediately. If possible show product information or label to the medical advisor.

### Care and maintenance


• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners. • From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

*Note:* if required the next page can be cut out and used as a reference throughout the assembly. Keep this page with these instructions for future reference.

## Components - Panels

If you have damaged or missing components, call the Customer Helpline:08456 400800

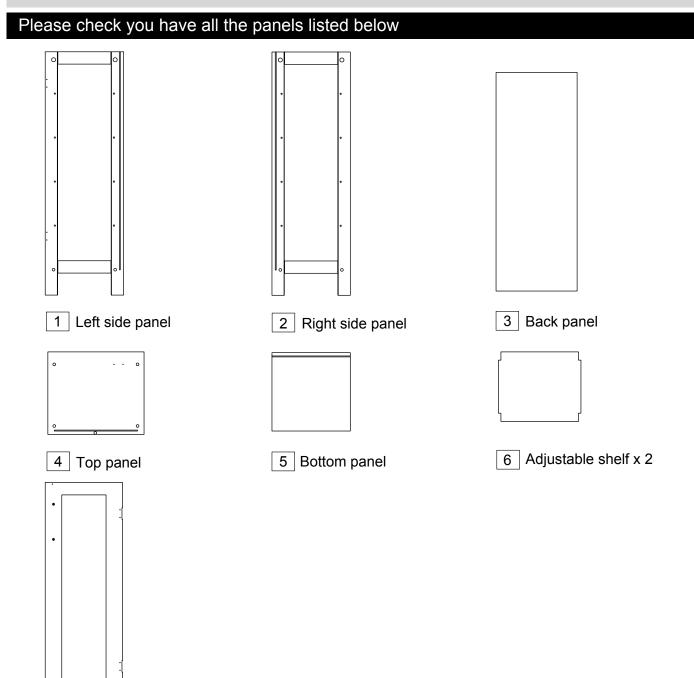


7 Door panel

## **Components - Fittings**

### Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly . In some cases more fittings may be supplied than are required.

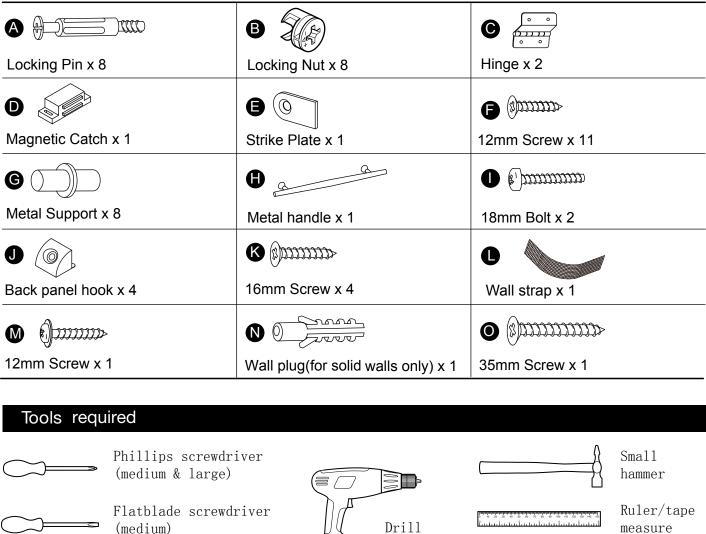

7mm Suitable drill bit (for use with wall plug)

Eye protection (when using a hammer or glue)

### Ruler - Use this ruler to help correctly identify the screws

mm

## **Assembly Instructions**

## Step 1

### Assembling bottom panel


NOTE: It would be useful to ask someone to help you at this stage.

Screw locking pins (A) into the side panel 1 & 2.

Insert locking nuts **B** into bottom panel **5**.

Carefully attach bottom panel to side panels as shown,pls make sure the grooves are aligned.

Tighten the locking nuts to secure the unit.

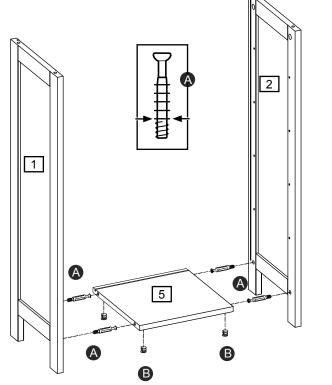





### Step 2

## Assembling top panel and back panel

a:Carefully slide back panel <u>3</u> into the groove of the unit.

Screw locking pins (A) into top panel


Use 12mm screws **(**) to fix magnetic catch **(**) on top panel.


Use 12mm screws 0 to fix wall strap 0 on top panel at this stage.


Insert locking nuts **B** into side panels 1 and 2 .

Carefully attach top panel 4 to the unit.

Tighten the locking nuts to secure the unit.





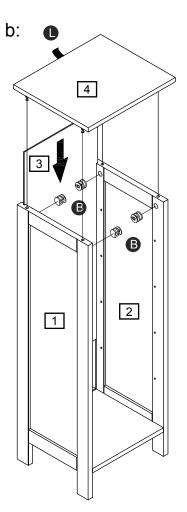


## Assembly Instructions

### Step 3

### Assembling back panel hook

NOTE: It would be useful to ask someone to help you at this stage.

Insert back panel hook ① into the groove of side panel 1 2 and use 16mm screw 🚯 to fix back panel hook to the under unit.

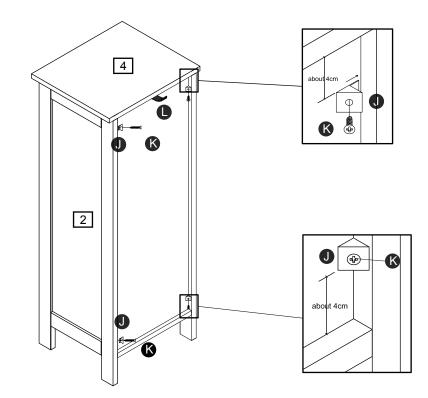

b:

### Step 4

### Assembling door panel


NOTE: It would be useful to ask someone to help you at this stage.


a:Use 12mm screw 🕞 to fix strike plate 🕒 onto the door panel 7.

Use 18mm bolts **1** to fix metal handle **(f)** onto door panel.

Use 12mm screws **()** to fix hinges **()** onto the door panel.

b:Attach door panel 7 onto the unit by fixing hinge with screw .

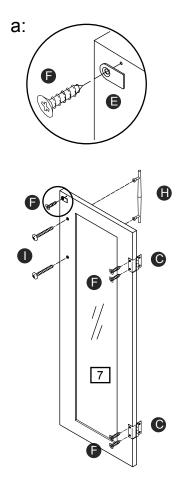

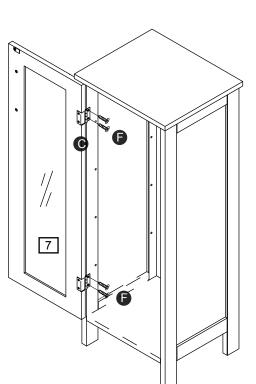

## Assembly Instructions

### Step 5

### Fixing to the wall

NOTE: It would be useful to ask someone to help you at this stage.

With help,move the unit into position.


### Warning:



Before drilling, check wall for hidden pipes and cables.

Fix wall strap **U** to wall using 35mm screw **O** and wall plug **N** 





### Step 6

## Assembling adjustable shelf panel


NOTE: It would be useful to ask someone to help you at this stage.

Insert metal supports **G**into side panels 1 2 .

Carefully put the adjustable shelf panel 6 on it.

NOTE: Please make sure the unit is secure before use.

The assembly is now complete.

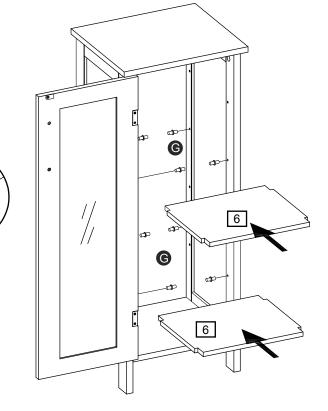

NOTE: If you have damaged or missing components, call the Customer Helpline:08456 400800 Argos LTD,489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# A Guide to - Wall Mounting & Fixings

### Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



*Important:* When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


### Hints:

- **1: General rule:** Always use a larger screw and wall plug if you are not sure.
- **2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- **3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- **4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.

You can use one of the following types of wall plug if your walls are made


**5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

### Types of walls



Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

#### No.2 "Plasterboard" wall plug




For use when attaching light loads on to plasterboard partitions.




No.3 "Cavity Fixing" wall plug

of brick, breeze block, concrete, stone or wood.



For use with plasterboard partitions or hollow wooden doors.


#### No.4 "Cavity Fixing-Heavy Duty" wall plug



For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.


**Safety:** Always check the fitting and location to ensure your safety in and around the home.

#### No.5 "Hammer Fixing" wall plug



For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

#### No.6 "Shield Anchor" wall plug Heavy loads



For use with heavier loads such as TV & HiFi speakers and satelite dishes etc.

**Fitting:** From time to time check the fitting to ensure the wall plugs or screws do not become loose.

### SAFETY WARNING INFORMATION

Keep these instructions for future use:

#### WARNINGS

\*Do not place very hot or very cold items against or in close proximity to glass surface unless an adequately thick insulating material is used to prevent such items from coming into contact with the glass.

\*Do not strike the glass with hard or pointed items.

\* Do not sit or stand upon horizontal glass surfaces. \*When cleaning glass panels or mirrors use a damp or leather with washing up liquid or soft soap if necessary do not use washing powders or any other substance containing abrasive since these substances scratch glass.

\*It is essentail that this unit is fixed to a wall with the fixings provided.

### BS7449:1991

Catalogue Number	: 833/4455(D)
Manufacture date:	Apr. 8th. 2013
Retailer:	Argos
Retailer address:	489-499 Avebury Boulevard
	Saxon Gate West
	Saxon Gate West Central Milton Keynes

This unit contains <u>tempered glass</u> of a nominal thickness of <u>4</u> mm, which is not required to be classified to BS6206 Class C.

If a glass is chipped or broken replace with glass of the type described on this label. Consult the manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the model number, and batch number or date of manufacture.