

New Hallingford - 3 Drawer Bedside

Assembly Instructions - Important: Retain these instructions for future reference

652/9482

618/4999

673/1902

620/9379

673/2176

601/6737

677/5449

618/6959


678/3699

616/9749

887/6449

916/0109

HOME

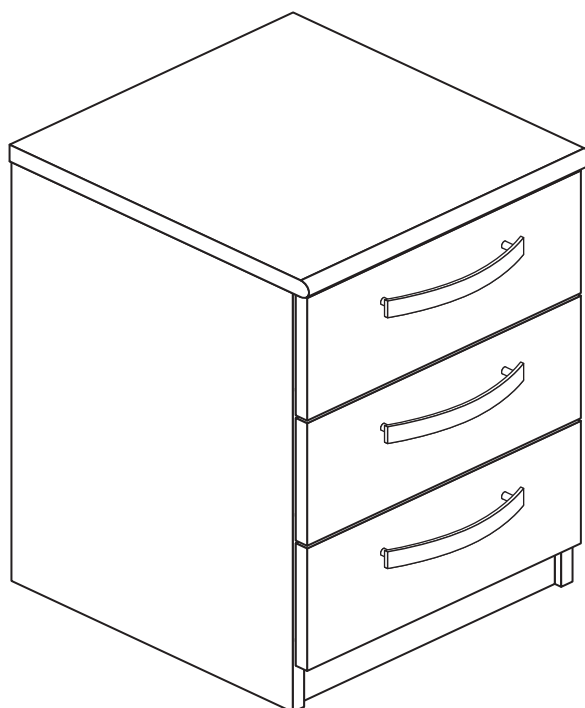

WARNING!

In order to prevent overturning, this product must be used with the wall attachment device provided

Dimensions

Width - 37.5cm

Depth - 40cm

Height - 58cm

More help is available throughout this booklet by scanning in the QR codes or typing in the links



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: 0330 016 1114

For any other queries please contact the Customer Helpline on: 0345 640 2020

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 14kgs. Please lift with care.
- Assembly to be carried out by a competent adult only.
- Check you have all the components and tools listed on pages 1, 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- During assembly children should be kept away from the product due to possible risk of injury.
- Installation shall only be carried out exactly according to the manufacturer's instructions - otherwise a safety risk can occur if incorrectly installed.

- Parts of the assembly will be easier with 2 people.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**,


as this could damage the unit. Only use hand screwdrivers.

- **WARNING:** To prevent possible overbalancing this unit **must be secured** to a wall using the overbalance protector kit supplied.
- Dispose of all packaging carefully and responsibly.
- Do not use this item if any components are missing or damaged.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Tools required



Scissors



Rule



Flat-head screwdriver



Cross-head screwdriver




Bradawl



Hammer



Eye protection
(when using a
hammer or drill)




Electric drill
(do not use for
fitting screws)


Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels


Please check you have all the panels listed below

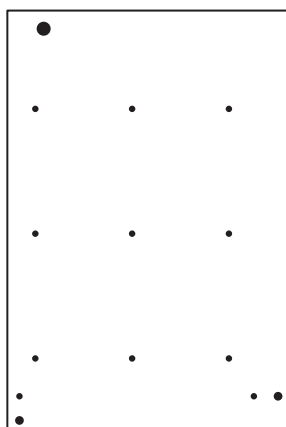


1 Left Side (*D2307A*)
(55.6 x 37.2cm)

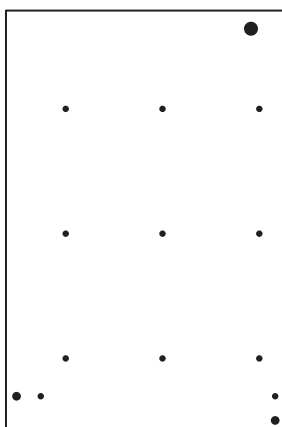


2 Right Side (*D2308A*)
(55.6 x 37.2cm)



3 Top (*D2306A*)
(37.5 x 39.6cm)



4 Rail (*D2310A*)
(34.1 x 6cm) x 2



5 Drawer Front (*D2309A*)
(36.2 x 16.2cm) x 3



6 Left Drawer Side (*W370-124LH*)
(37 x 12.4cm) x 3



7 Right Drawer Side (*W370-124RH*)
(37 x 12.4cm) x 3



8 Drawer Back (*W291-124*)
(29.1 x 12.4cm) x 3



9 Drawer Base (*T304-367*)
(30.4 x 36.7cm) x 3












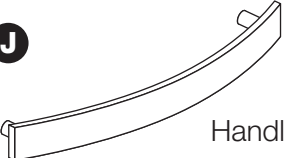







10 Back (*X535-366*)
(53.5 x 36.6cm)




Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

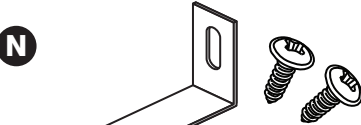A  Wooden dowel (F22) x 6	B  Metal dowel (F901) x 12	C  Small locking cam nut (F3) x 6
D  Large locking cam nut (F900) x 6	E  Knock-in Peg (F171GY) x 12	F  Nail (F51) x 12
G  19mm Screw (F461) x 6	H  9mm Screw (F73) x 18	I  13mm Screw (F63) x 18
J  Handle (F278) x 3	<div data-bbox="587 965 1437 1384"> K a  350mm long CL Runner (F422) x 3 K b  CR CR Runner (F424) x 3 K c  DL DL Runner (F425) x 3 K d  DR DR Runner (F426) x 3 </div>	
L  Wedgex (F639) x 6		
M  Plastic Nail (F91) x 4		
N  Overbalance protector kit (F474) x 1		

Ruler - Use this ruler to help correctly identify the screws

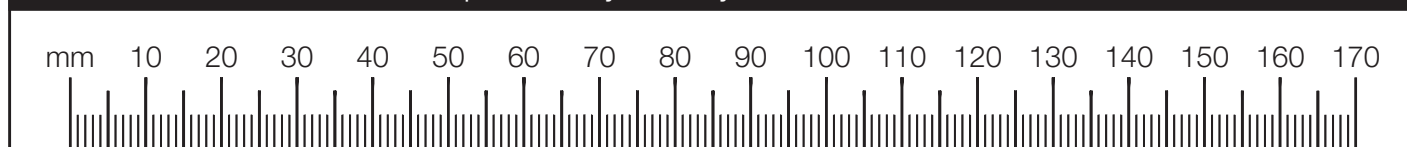

Assembly Instructions

Step 1

Prepare the 3 drawer fronts


Screw 2 metal dowels **B** into the holes shown on the back of each drawer front **5**.

Note: Tighten metal dowels up fully against the panels.



Drawer Assembly

www.youtube.com/watch?v=3fYL5zB6ZYQ

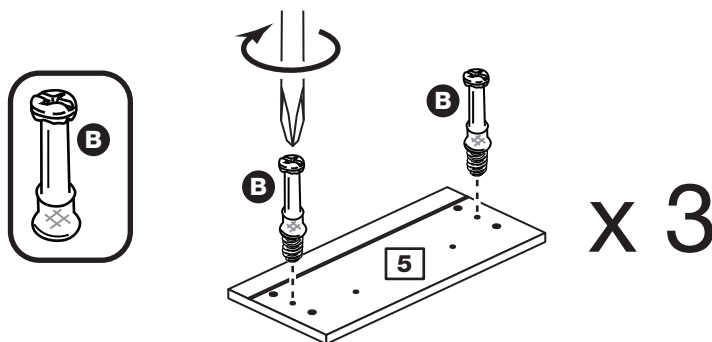


Step 2

Prepare the drawer sides

Insert a small locking cam nut **C** into the hole shown on the left drawer side **6** and right drawer side **7**.

Note: The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.

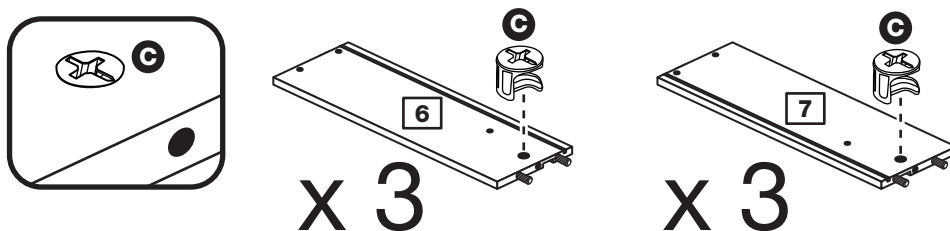


Step 3

Attach the drawer sides to the drawer front

Push the left drawer side **6** and right drawer side **7** onto the back of the drawer front **5**.

Turn the small locking cam nuts **C** on the left drawer side **6** and right drawer side **7**.

Note: Turn the locking cam nuts **C** clockwise to secure panels - more than 1/2 a turn.

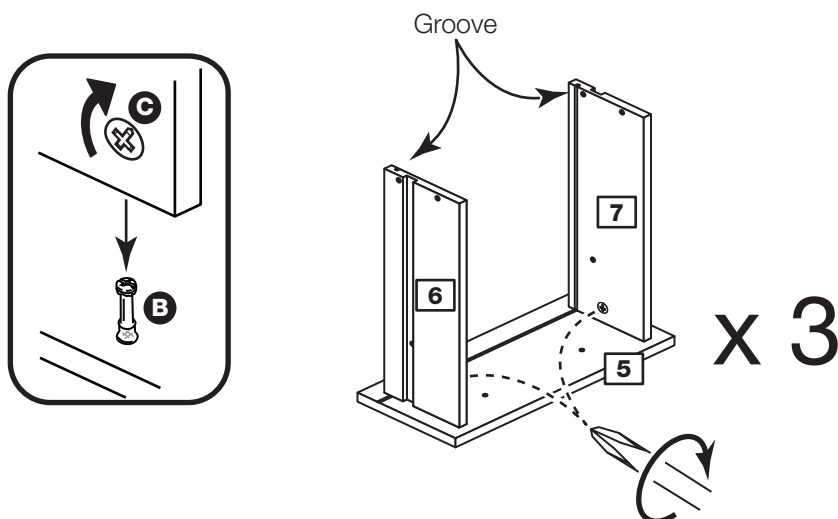


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **9** down the grooves in the drawer sides **6** and **7** and down into the groove in the drawer front **5**.

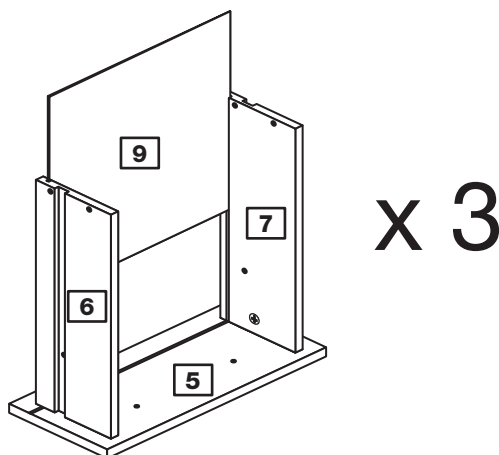


Step 5

Fit the drawer back

Fit the drawer back **8** between the drawer sides **6** and **7**.

Make sure that the drawer base **9** fits into the groove in the drawer back **8**.


Hold the drawer back **8** in position and tap the knock-in pegs **E** through the holes in the drawer sides **6** and **7**.

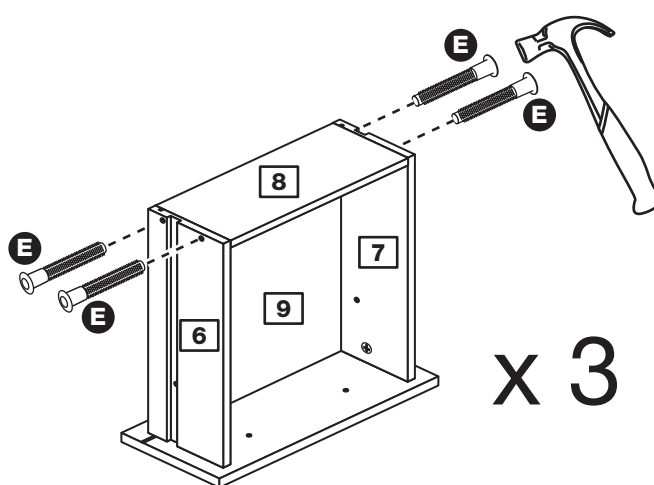

Step 6

Attach the handle


Attach a handle **J** to each drawer front **5** using 2 screws **G**.

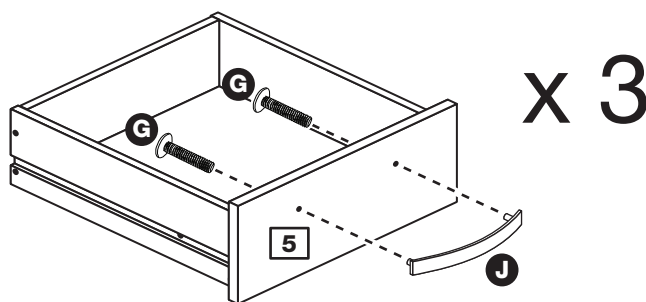


Step 7

Fit the wedgefixes

Turn the drawer assemblies over and slide 2 wedgefixes **L** into the front and back grooves, as shown, and tighten up the screws.

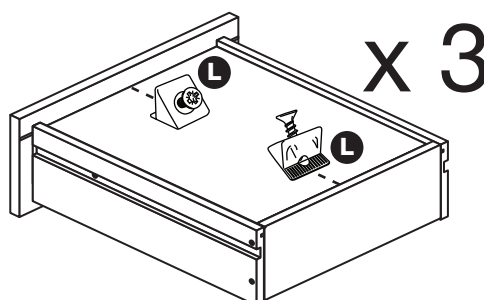

Important: Make sure that the drawer assembly is square before fitting the wedgefixes.



Assembly Instructions

Step 8

Fit runners to the drawers

Turn the 3 drawer assemblies over.

Fit runner **Kd**, marked with 'DR', to the bottom edge of the right drawer side **7**, as shown, making sure that it is pushed up against the back of the drawer front **5**.


Use a bradawl to mark the fixing positions, then secure with 2 screws **I**.

Fit runner **Kc**, marked 'DL', to the bottom edge of the left drawer side **6** using the same method.



Fixing Bottom Mounter Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

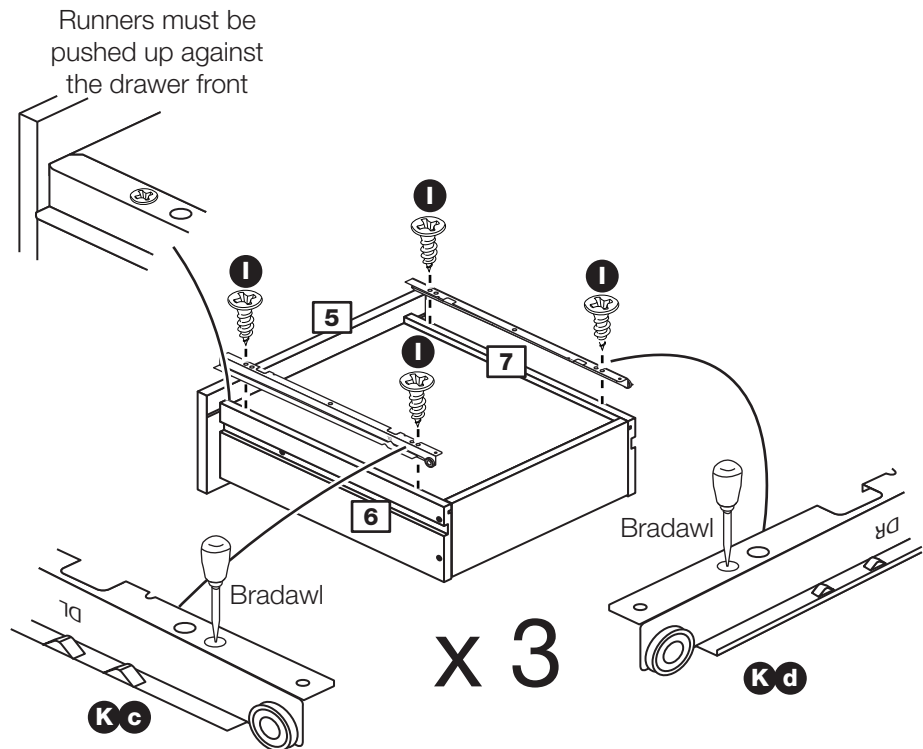

Step 9


Prepare the 2 rails

Tap 2 wooden dowels **A** into each rail **4**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking cam nuts **D** into each rail **4**.

Note: The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.

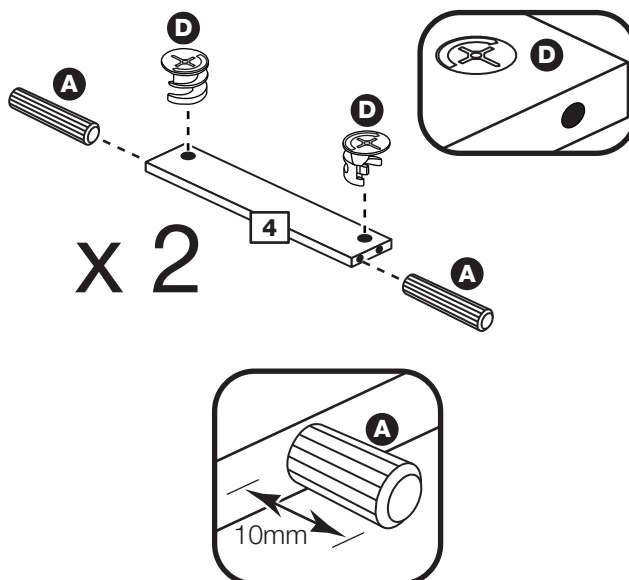

Assembly Instructions

Step 10

Prepare the left side

a: Fit 3 CL runners **K a** to the left side **1**.



The 1st screw **H** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **H** use the holes that line up with the other panel holes.



Fixing Bottom Mounter Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

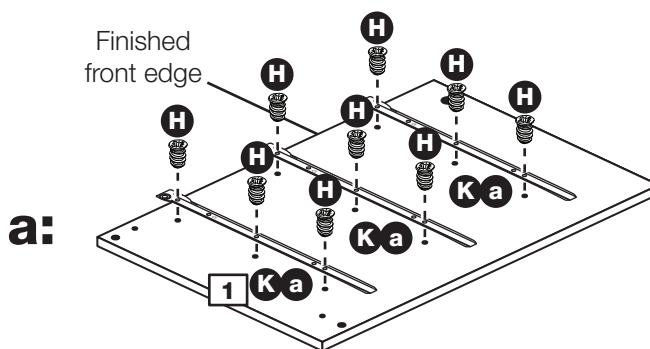
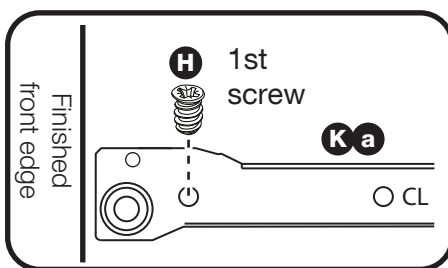


b: Mark the top hole of the runners **K a** with a bradawl and then fit a screw **I**.

Screw 2 metal dowels **B** into the left side **1**.

Insert a large locking cam nut **D** into the left side **1**.

Tap a wooden dowel **A** into the left side **1**.

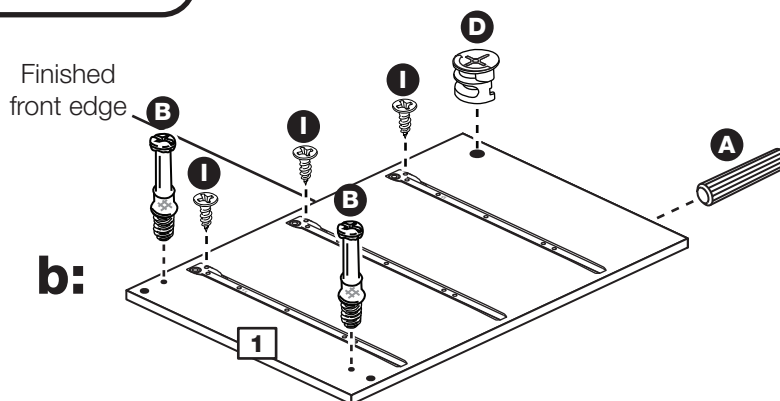

Assembly Instructions



Step 11

Prepare the right side

a: Fit 3 CR runners **K b** to the right side **2**.

The 1st screw **H** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **H** use the holes that line up with the other panel holes.

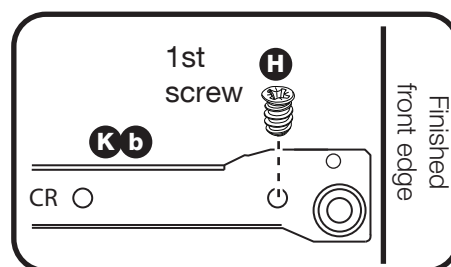
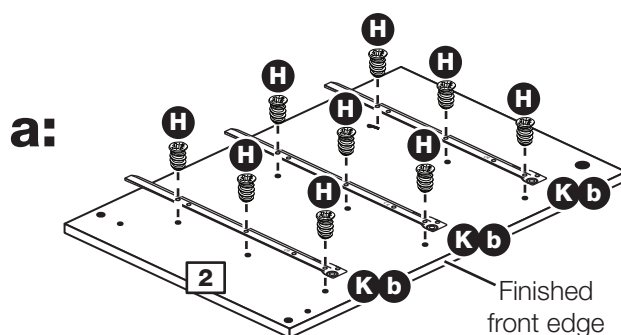


b: Mark the top hole of the runners **K b** with a bradawl and then fit a screw **I**.

Screw 2 metal dowels **B** into the right side **2**.

Insert a large locking cam nut **D** into the right side **2**.

Tap a wooden dowel **A** into the right side **2**.

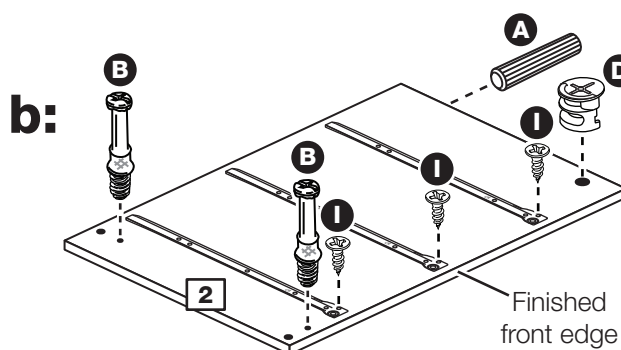



Step 12

Join the right side and rails

Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking cam nuts **D** fitted to the rails **4**.

Note: Turn the large locking cam nuts **D** as far as they will go - more than 1/2 a turn.

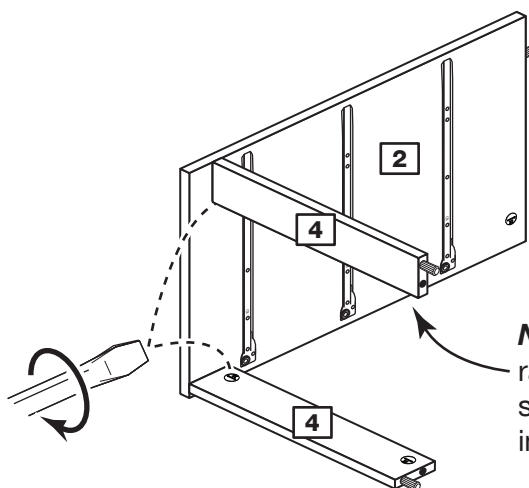

Note: Support this rail until the left side has been fitted in the next step.


Assembly Instructions

Step 13

Fit the left side

Push the left side **1** onto the 2 rails **4**.

Use a screwdriver to tighten the 2 large locking cam nuts **D** fitted to the rails **4**.

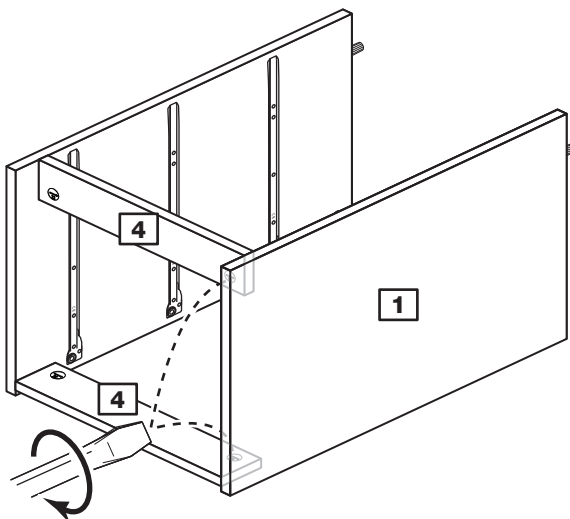


Step 14

Prepare the top

Screw 2 metal dowels **B** into the top **3**.

Fit the bracket from the overbalance protector kit **N** to the shallow mark-hole drilled into the top **3** using 1 of its screws.

Note: Only fit 1 of the screws, the other 1 will be fitted later.

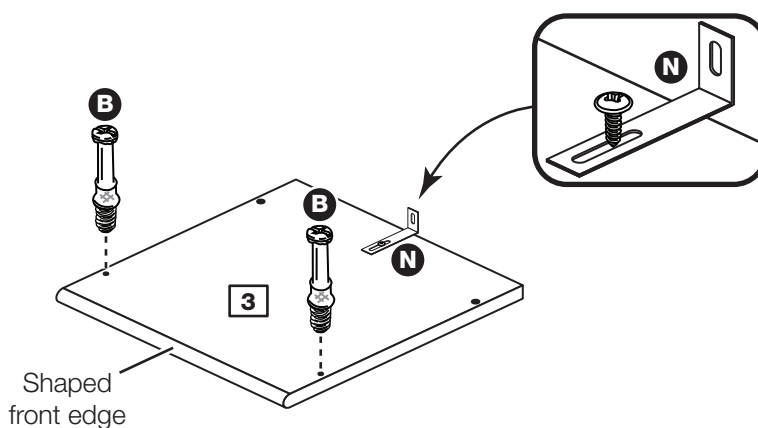


Step 15

Fit the top

Push the top **3** onto the 2 sides **1** and **2**.

Use a screwdriver to tighten the 2 large locking cam nuts **D** fitted to the sides **1** and **2**.

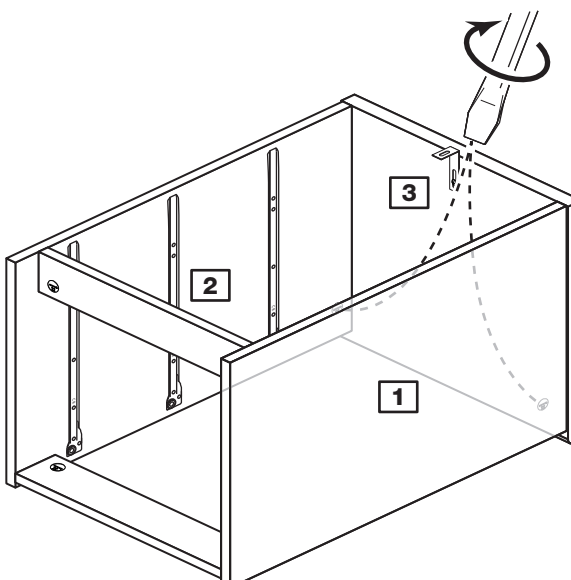

Assembly Instructions

Step 16

Fit the back

a: Square up the unit by making sure that measurement **x to x** equals **y to y**.

b: Place the back **10** onto the unit.

Nail **F** around the outside edges of the back **10**.


Note: Nails should be spaced about 150mm apart.



Squaring up a Chest and fitting the Back Panel

www.youtube.com/watch?v=Feal6541z7o

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

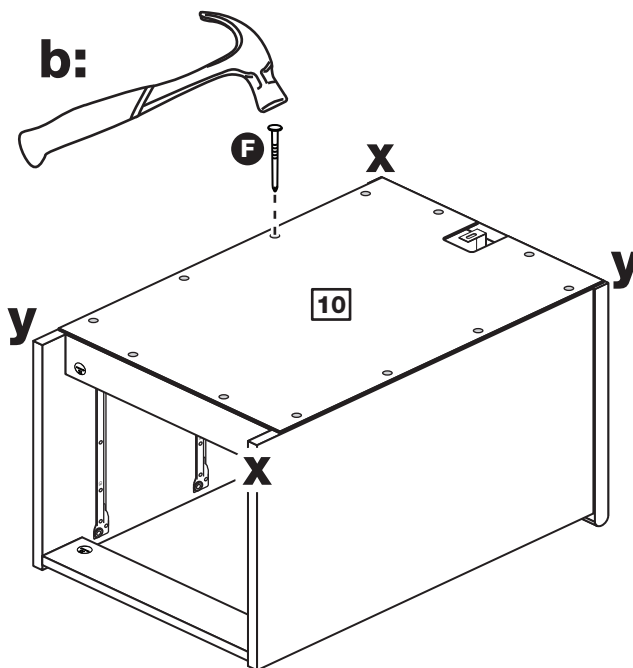

Step 17


Fit the 4 plastic nails

Tap 2 plastic nails **M** into the bottom edge of each of the sides **1** and **2**.

Stand the unit up for the next step.



Warning: The unit is heavy. Lift with care.

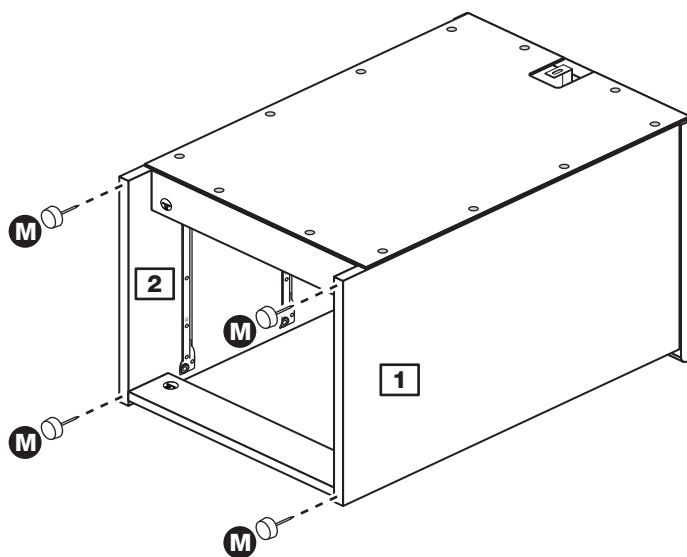

Assembly Instructions

Step 18

Secure the unit to a wall

a: Before fitting the unit to a wall, use a spirit level to check the top of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level.

To prevent possible overbalancing this unit **must be secured** to a suitable wall by fitting the overbalance protector kit **(N)** to a wall.

b: Push the unit up against the wall and slide the bracket against the wall. Fit the 2nd screw into the underside of the top panel.


Mark the slot at the back of the bracket for drilling into the wall.

Wall fixings are not supplied as they will need to suit the wall type.



WARNING!

In order to prevent overturning this product must be used with the wall attachment device provided


a:

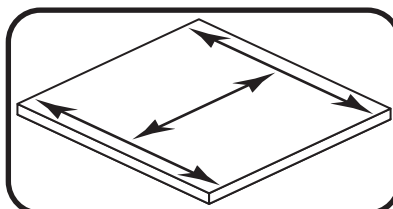

b:




See the next page for a guide to wall mounting and fixings

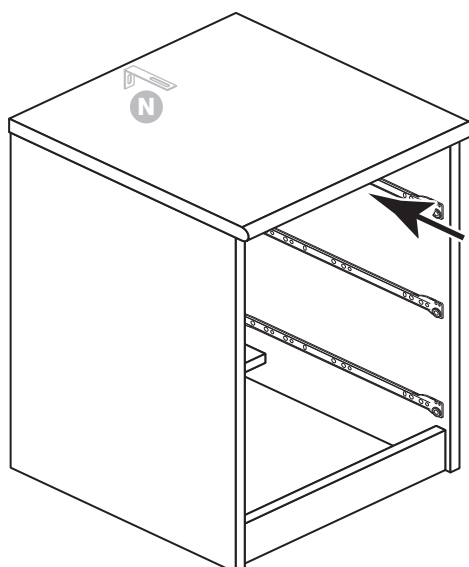

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.


Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:  Always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

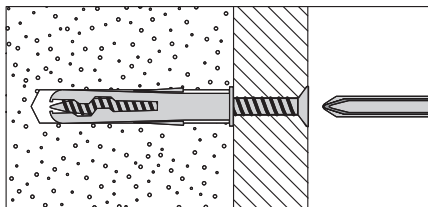


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

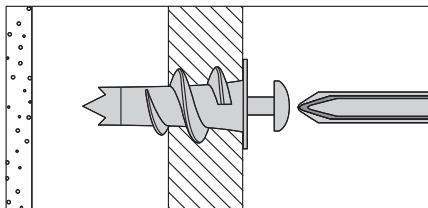


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

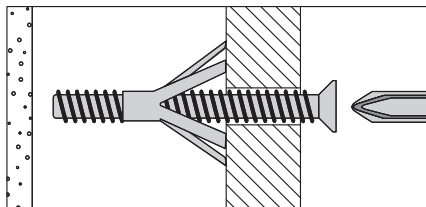


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

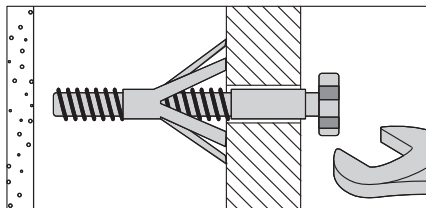


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

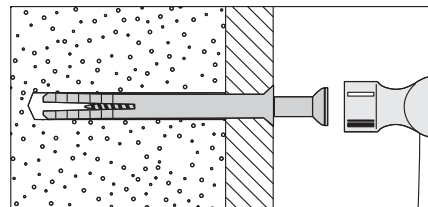

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

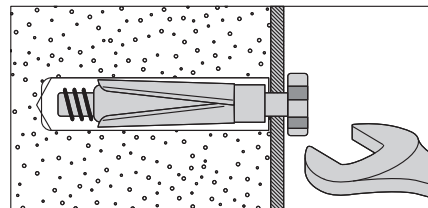

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.

Assembly Instructions

Step 19



Fit the drawers

Slide the wheels of the runners fitted to the drawers, over the wheels of the runners fitted to the side panels and push the drawers into position.



Fixing Bottom Mounter Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

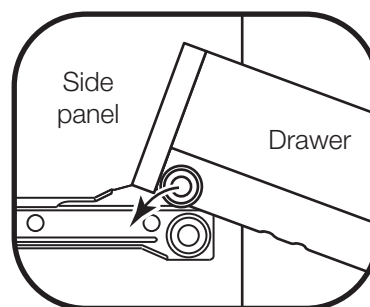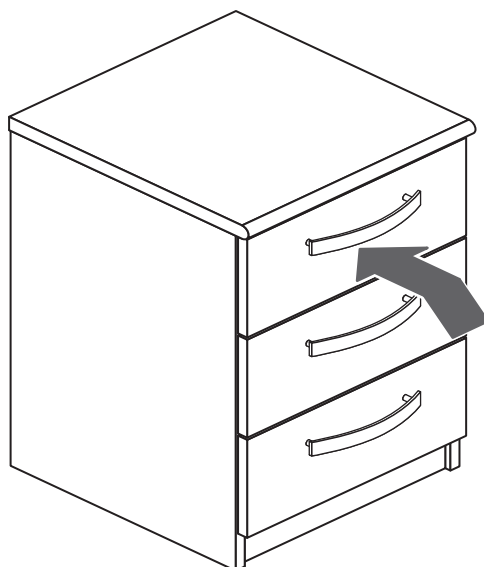

Assembly is complete

Please remove any blue protective film from panel edges and clear protective film from panel surfaces

