

Venice - 1500 Wide TV Unit


Assembly Instructions - Important: Retain these instructions for future reference

806/9627

804/8411

803/8304

HOME

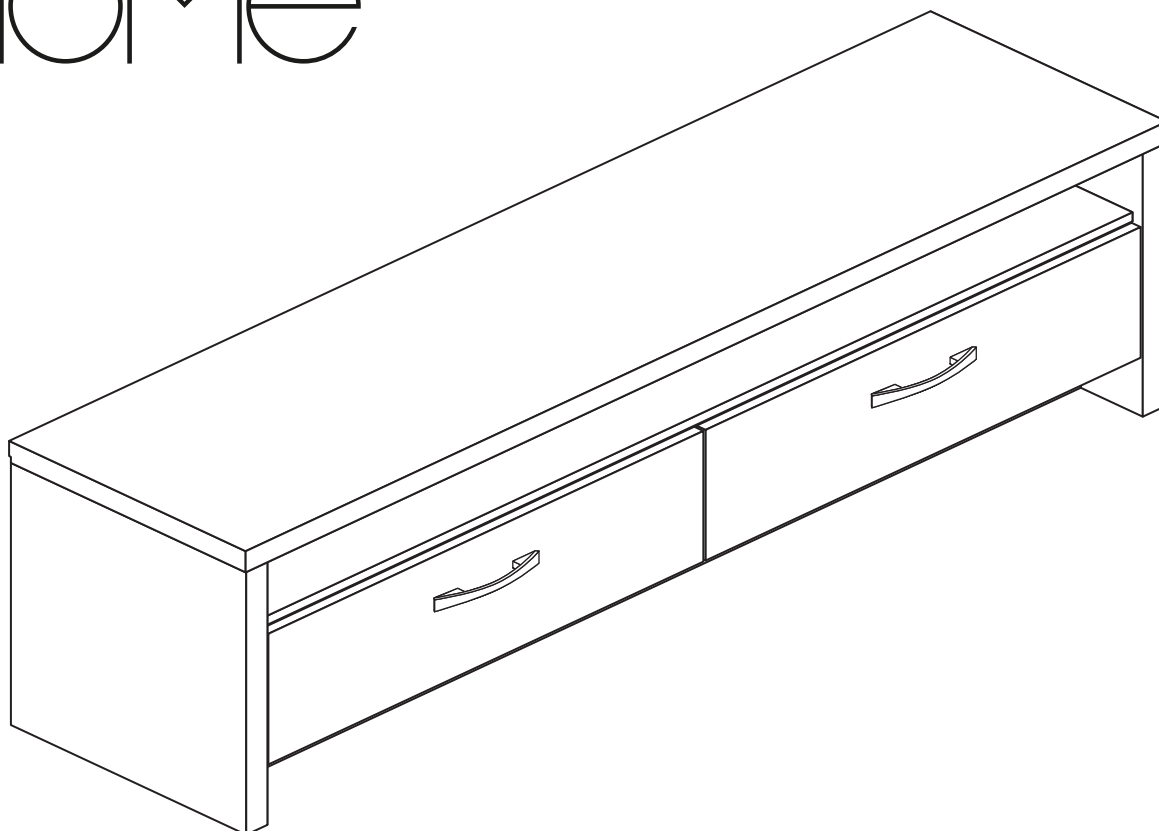

WARNING!

In order to prevent overturning, this product must be used with the wall attachment device provided

Dimensions

Width - 152.3cm

Depth - 39.1cm

Height - 47.1cm

More help is available throughout this booklet by scanning in the QR codes or typing in the links



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: 0330 016 1114

For any other queries please contact the Customer Helpline on: 0345 640 2020



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 36kgs. Please lift with care.
- Assembly to be carried out by a competent adult only.
- Check you have all the components and tools listed on pages 1, 2, 4 and 4.
- Remove all fittings from the plastic bags and separate them into their groups.
- During assembly children should be kept away from the product due to possible risk of injury.
- Installation shall only be carried out exactly according to the manufacturer's instructions - otherwise a safety risk can occur if incorrectly installed.

- Parts of the assembly will be easier with 2 people.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit. Only use hand screwdrivers.


- **WARNING:** To prevent possible overbalancing this unit **must be secured** to a wall using the overbalance protector kit supplied.
- Dispose of all packaging carefully and responsibly.
- Do not use this item if any components are missing or damaged.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- Regularly check all fastenings to ensure that they are properly tightened.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Components - Panels


Please check you have all the panels listed below



1 Left Drawer Front (DF-00012886)
(71.9 x 21.6cm)




2 Right Drawer Front (DF-00012887)
(71.9 x 21.6cm)



3 Left Drawer Side (WRP-000000412L)
(35 x 16.5cm) x 2



4 Right Drawer Side (WRP-000000413RH)
(35 x 16.5cm) x 2




5 Drawer Base (TDF-00020643)
(67.6 x 34.7cm) x 2




6 Drawer Back (WRP-000000414BCK)
(66.6 x 16.5cm) x 2

Components - Panels


Please check you have all the panels listed below



7 Left Side (DF-00012879)
(43.6 x 38.9cm)




8 Right Side (DF-00012880)
(43.6 x 38.9cm)




9 Divider (DF-00012884)
(20.4 x 36.7cm)




10 Small Divider (DF-00017805)
(10.6 x 19.3cm)

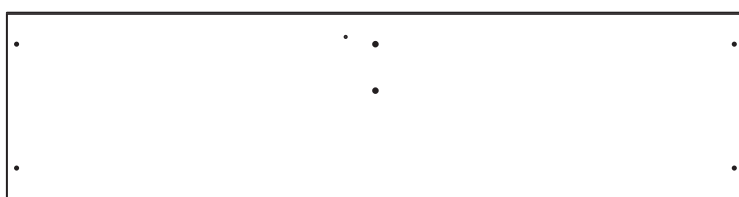


11 Top (DF-00012878)
(152.3 x 39.1cm)




12 Back (X624-346)
(62.4 x 34.6cm) x 2

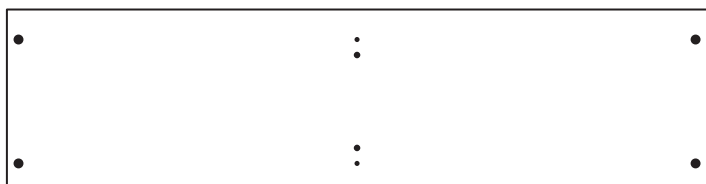


13 Fixed Shelf (DF-00012883)
(144.7 x 36.9cm)



14 Bottom Rail (DF-00012881)
(144.7 x 12.8cm)



15 Back Rail (DF-00012993)
(144.7 x 9.6cm)









16 Plinth Rail (DF-00012882)
(144.7 x 9.6cm) x 2

Components - Fittings











Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


Bag 2

A  <p>Metal dowel (F901) x 4</p>	B  <p>Small locking cam nut (F3) x 4</p>	C  <p>Knock-in Peg (F171GY) x 8</p>
D  <p>19mm Screw (F461) x 4</p>	E  <p>13mm Screw (F63) x 8</p>	F  <p>15mm Screw (F284) x 4</p>

Bag 1

A  <p>Metal dowel (F901) x 14</p>	E  <p>13mm Screw (F63) x 4</p>	G  <p>Large locking cam nut (F900) x 14</p>
H  <p>Wooden dowel (F22) x 14</p>	I  <p>40mm Screw (F910) x 2</p>	J  <p>9mm Screw (F73) x 12</p>
K  <p>Hollow core locking nut (F892) x 4</p>	L  <p>Small metal dowel (F893) x 8</p>	M  <p>Wedge fix (F532) x 4</p>
N  <p>Nail (F51) x 24</p>		

Ruler - Use this ruler to help correctly identify the screws

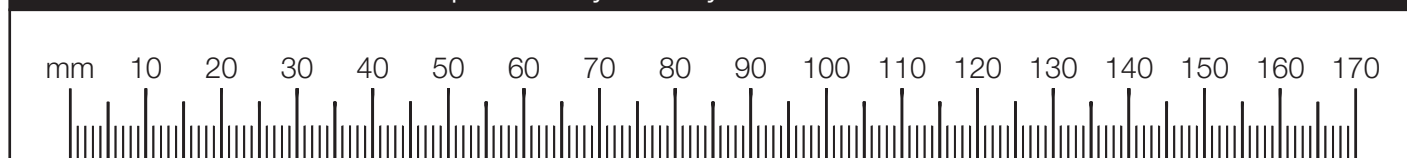
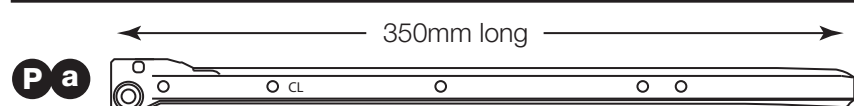







Components - Fittings


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Individual Fittings Bags

 <p>336mm long</p> <p>Drawer Brace (F420) x 2</p>	
 <p>350mm long</p> <p>CL Runner (F422) x 2</p>	 <p>Overbalance protector kit (F474) x 1</p>
 <p>CR Runner (F424) x 2</p>	
 <p>DL Runner (F425) x 2</p>	
 <p>DR Runner (F426) x 2</p>	 <p>Handle (F428) x 2</p>

Tools required

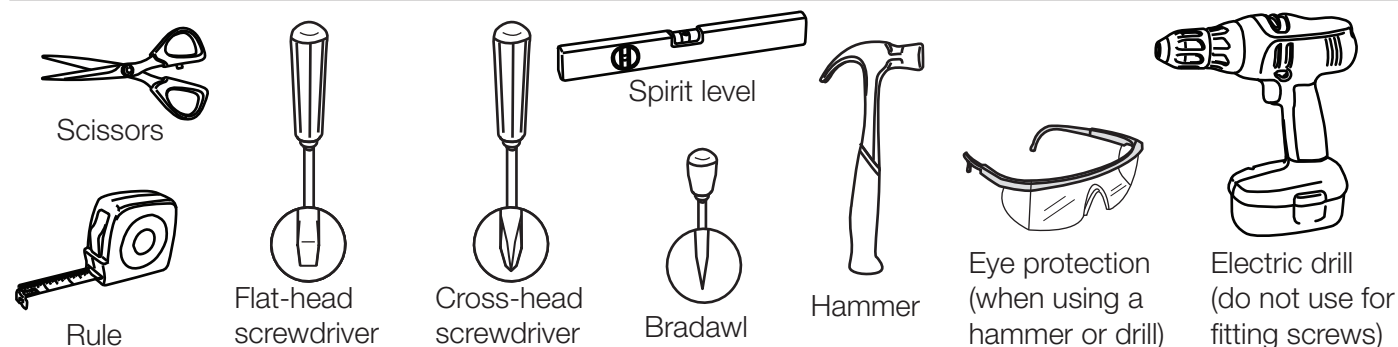

Assembly Instructions

Step 1

Prepare the left and right drawer front

Screw 2 metal dowels **A** into each of the 2 drawer fronts **1** and **2**.


Note: Tighten the metal dowels up fully against the panels.

Use the Bag 2 for Steps 1 - 8



Standard Drawer Box Assembly

<https://www.youtube.com/watch?v=HclfJdkm-Lg>

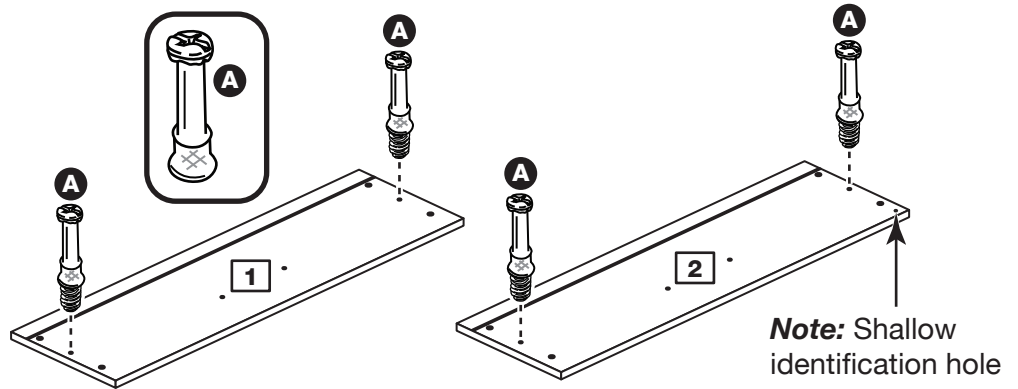


Step 2

Prepare the drawer sides

Insert a small locking nut **B** into the hole shown on the left drawer side **3** and the right drawer side **4**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

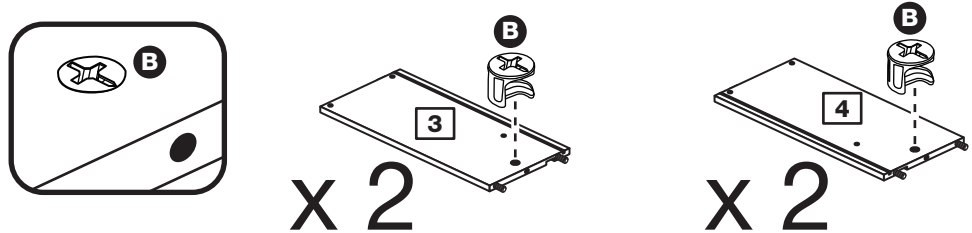


Step 3

Attach the drawer sides to the drawer fronts

Push the left drawer sides **3** and right drawer sides **4** onto the back of the drawer fronts **1** and **2**.

Turn the small locking nuts **B** on the left drawer sides **3** and right drawer sides **4**.

Note: Turn the locking nuts **B** clockwise to secure panels - more than 1/2 a turn.

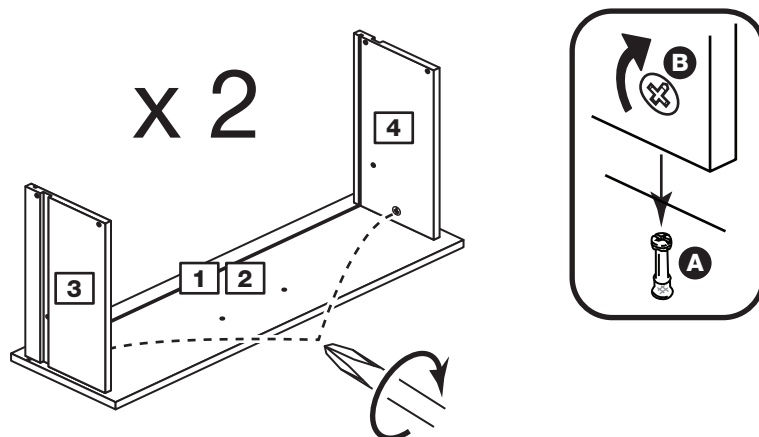


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **5** down the grooves in the drawer sides **3** and **4** and down into the groove in the drawer front **1** and **2**.

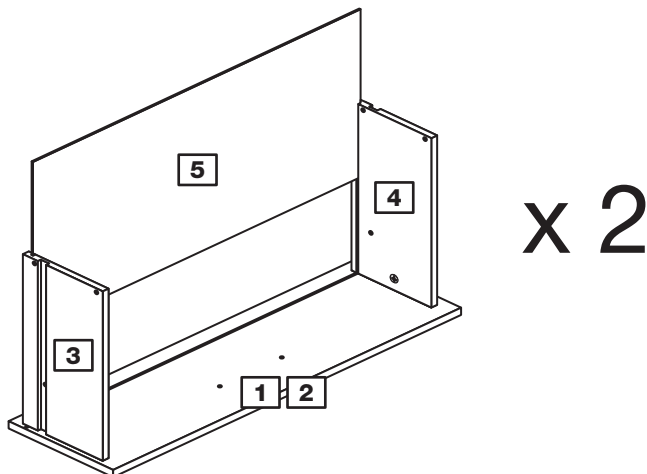


Step 5

Fit the drawer back

Fit the drawer back **6** between the drawer sides **3** and **4**. Make sure that the drawer base **5** fits into the groove in the drawer back **6**.


Hold the drawer back **6** in position and tap the knock-in pegs **C** through the holes in the drawer sides **3** and **4**.

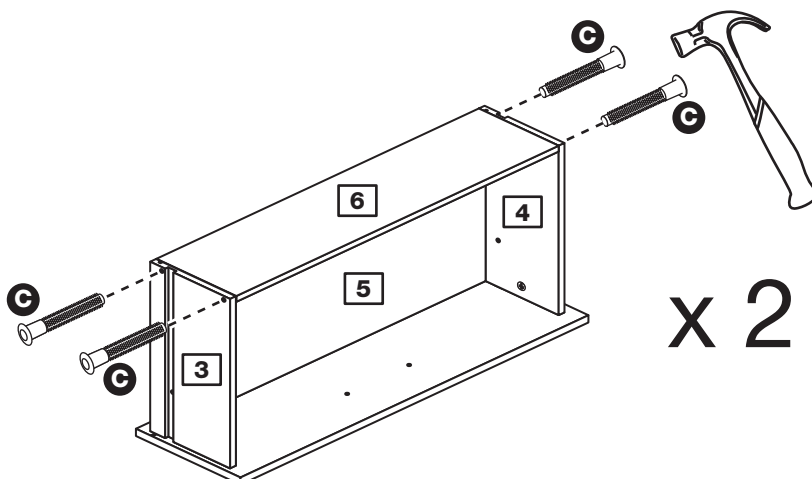

Step 6

Attach the handles

Attach a handle **R** to each drawer front **1** and **2** using screws **D**.

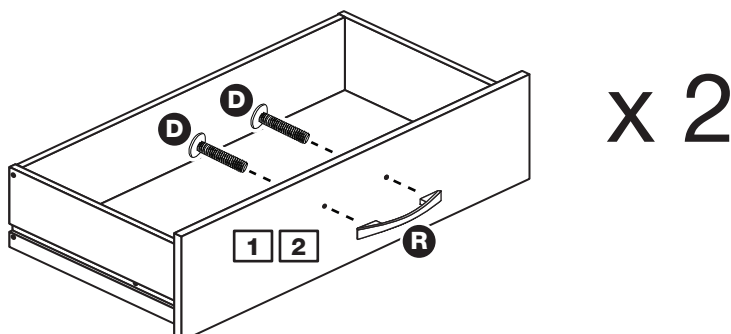


Assembly Instructions

Step 7

Fit the drawer braces

Turn the 2 drawer assemblies over and hook a drawer brace **O** onto the bottom edge of the drawer back **6**.

Fix it to the drawer front **1** and **2** and drawer back **6** using 2 screws **F**.

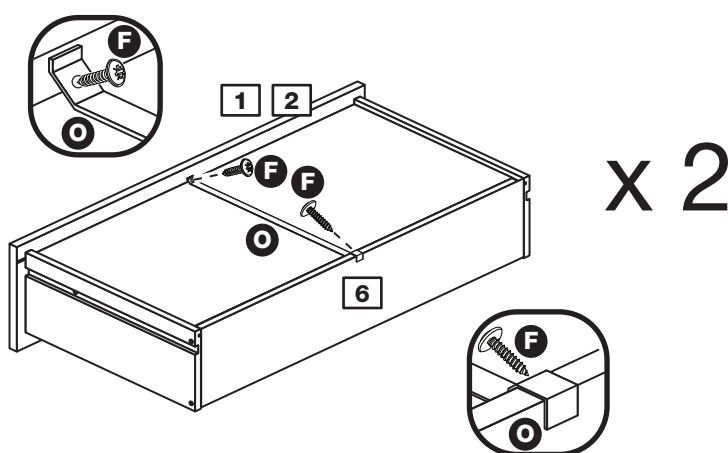

Step 8

Fit runners to the drawers


Fit the DL runner **Pc** to the bottom edge of the left drawer side **3**, as shown, making sure that it is pushed up against the back of the drawer front **1** and **2**. Use a bradawl to mark the fixing positions, then secure with 2 screws **E**.

Fit the DR runner **Pd** to the bottom edge of the right drawer side **4** using the same method.



Fixing Bottom Mounted Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

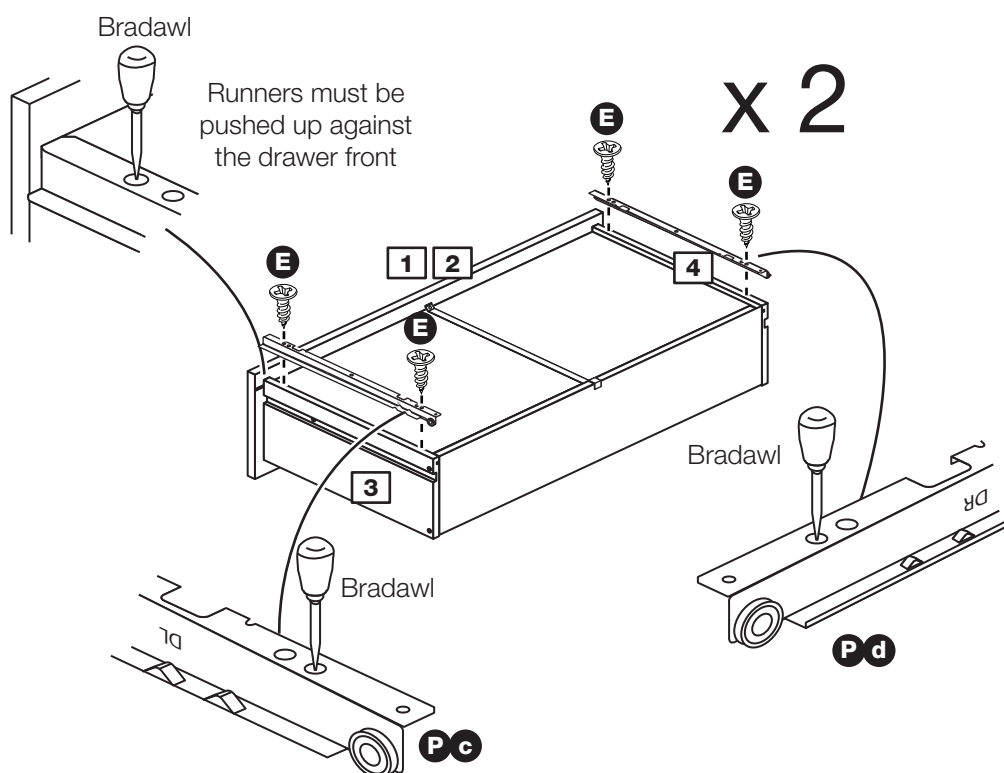

Assembly Instructions

Step 9

Use the Bag 1 for Steps 9 - end

Prepare the right side

a: Fit a CR runner **Pb** to the right side **8**.

The 1st screw **J** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **J** use the holes that line up with the other panel holes.

b: Mark the top hole of the runner **Pb** with a bradawl and then fit a screw **E**.

c: Screw 6 metal dowels **A** into the right side **8**.

d: Push 2 hollow core locking nuts **K** into the right side **8**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **K**.



Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **K**.





Fixing Bottom Mounted Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>


a:

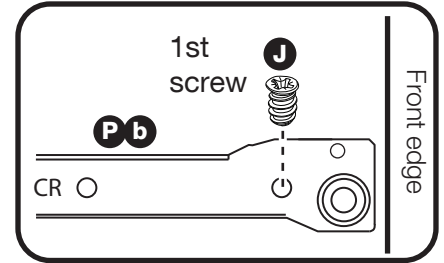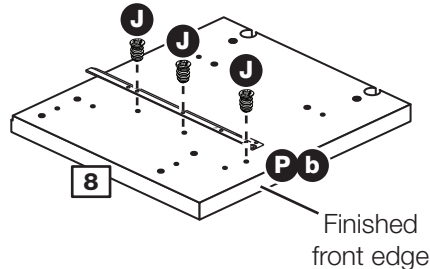





b:

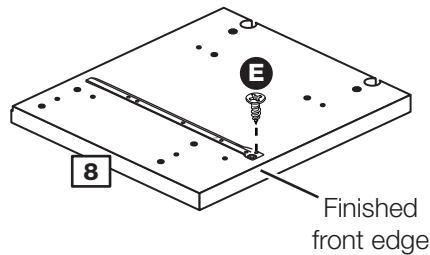

c:

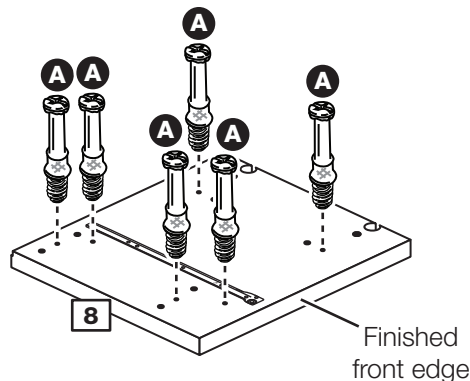

d:

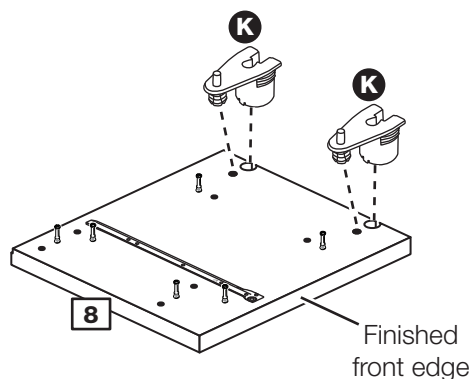

Assembly Instructions


Step 10

Prepare the top

Screw 6 small metal dowels **L** into the holes in the top **11**.

Fit the bracket from the overbalance protector kit **Q** to the shallow mark-hole drilled into the top **11** using 1 of its screws.

Note: Only fit 1 of the screws, the other 1 will be fitted later.

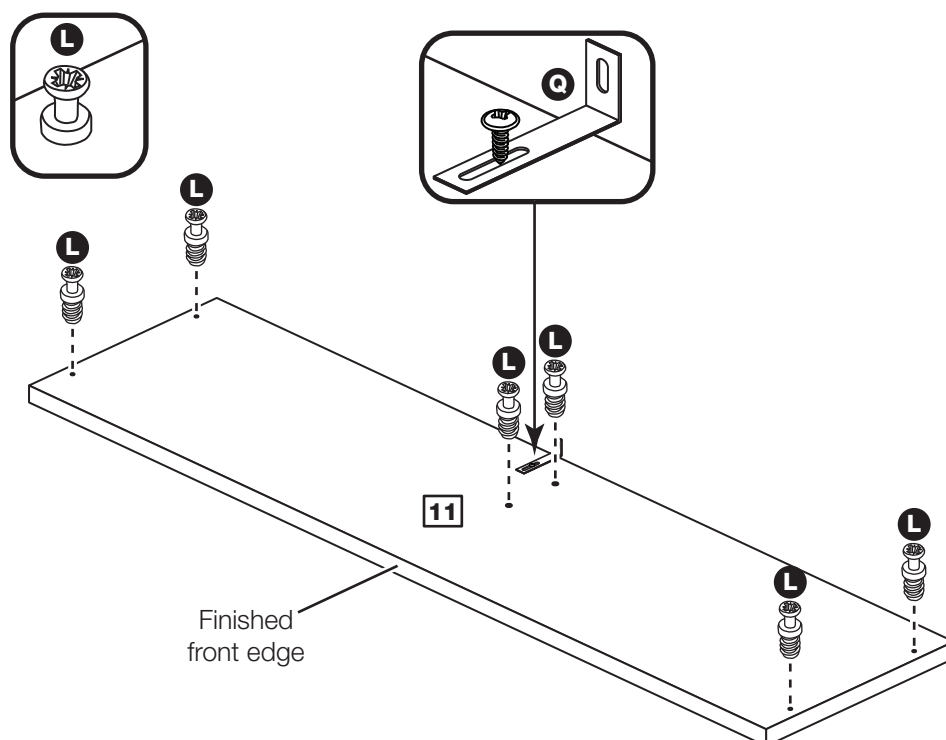


Step 11

Fit the right side to the top

Slide the right side **8** onto the top **11**.

The 2 hollow core locking nuts **K** fitted to the right side **8** must slide over the 2 small metal dowels **L** fitted to the top **11**.

Insert a screwdriver into the 2 hollow core locking nuts **K** and turn the nuts inside as far as they will go.

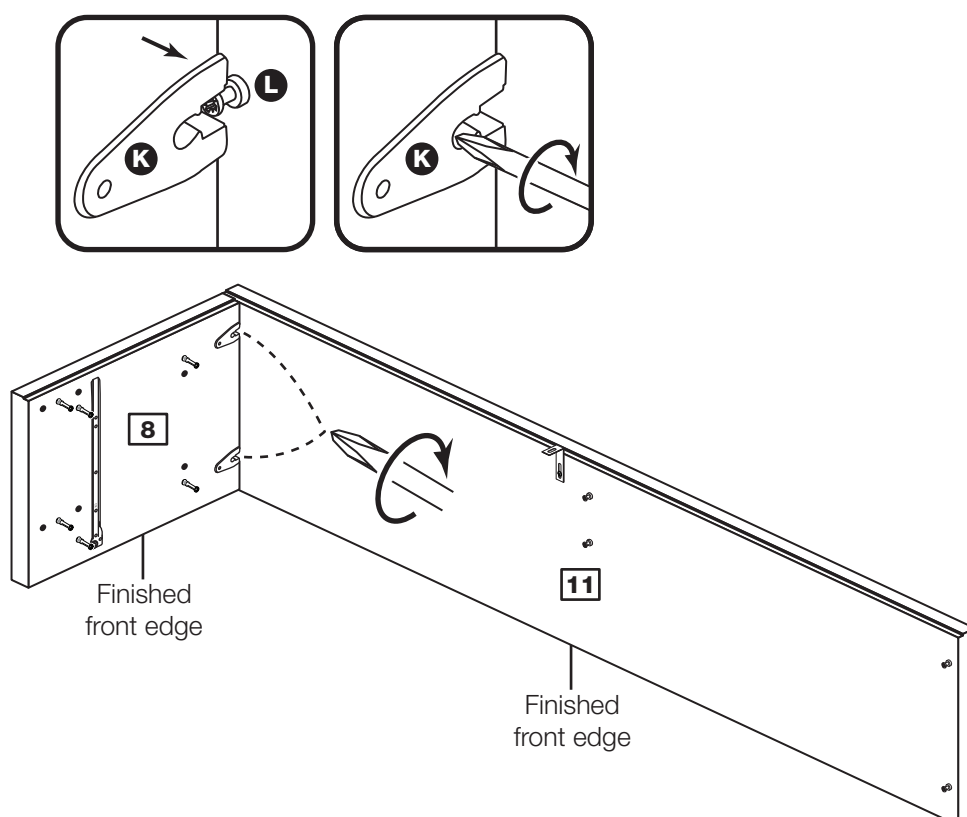

Assembly Instructions


Step 12

Prepare the fixed shelf

Tap 4 wooden dowels **H** into the fixed shelf **13**.

Insert 4 large locking cam nuts **G** into the fixed shelf **13**.


Screw 2 metal dowels **A** into the fixed shelf **13**.

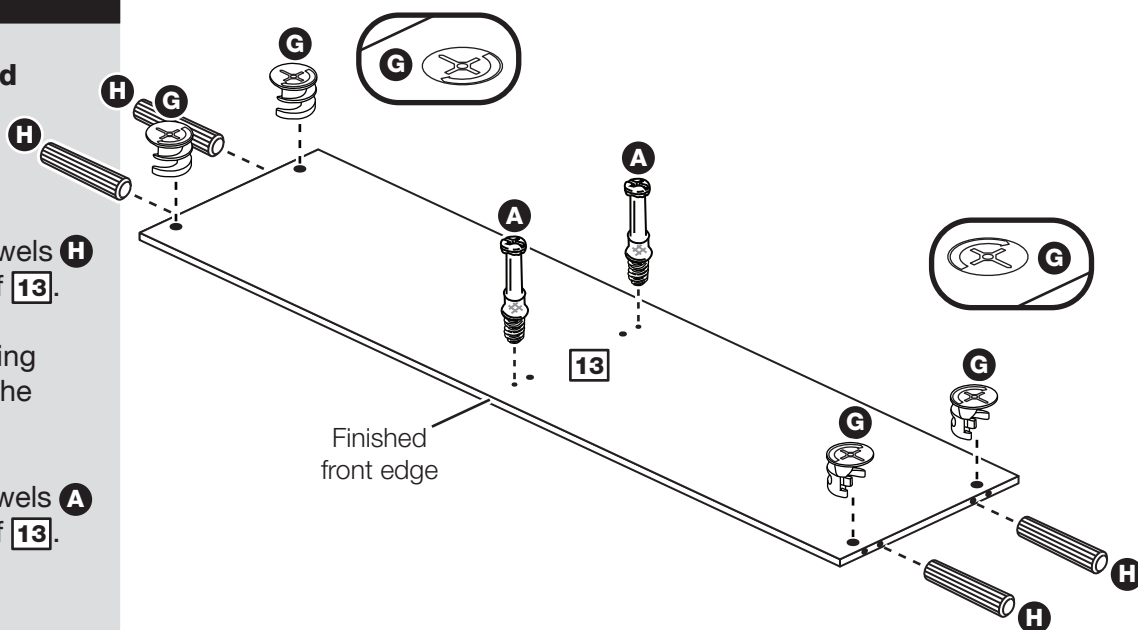

Step 13

Turn the fixed shelf over

Screw 2 small metal dowels **L** into the holes in the fixed shelf **13**.

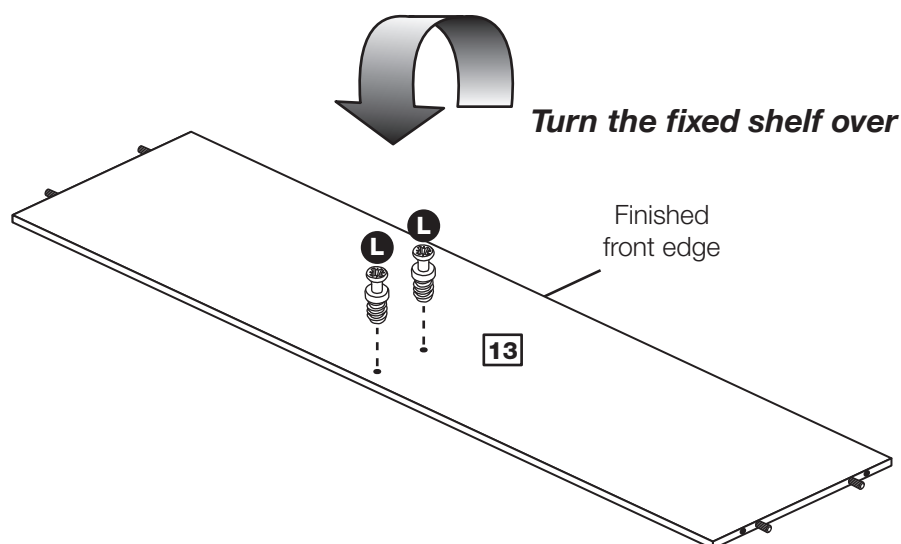


Step 14

Fit the fixed shelf

Push the fixed shelf **13** onto the right side **8**.

Use a screwdriver to tighten the 2 large locking cam nuts **G** fitted to the fixed shelf **13**.

Note: Turn the large locking cam nuts **G** as far as they will go - more than 1/2 a turn.

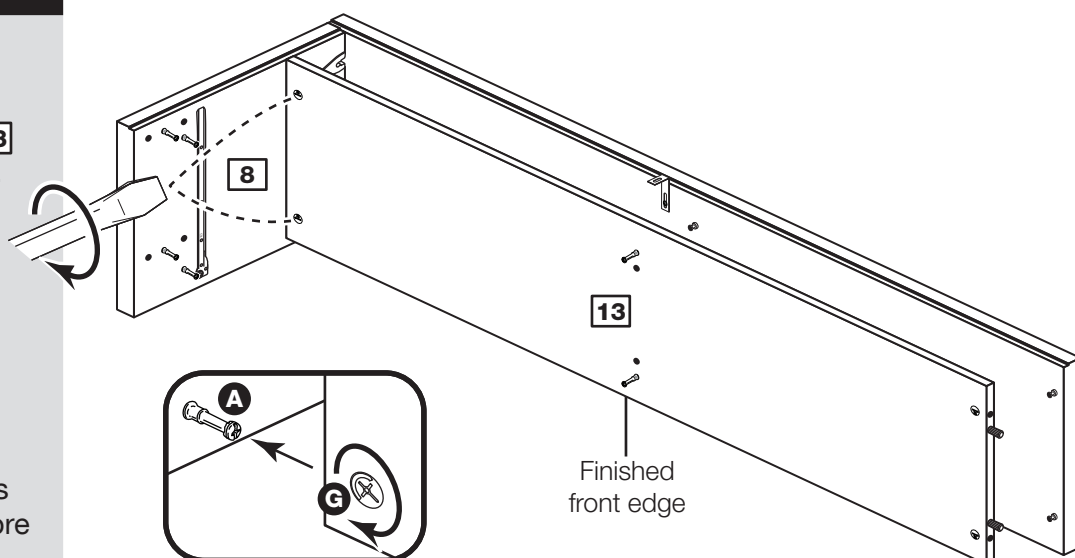

Assembly Instructions

Step 15

Prepare the divider

a: Fit a CL runner **Pa** to the divider **9**.

The 1st screw **J** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **J** use the holes that line up with the other panel holes.

b: Mark the top hole of the runner **Pa** with a bradawl and then fit a screw **E**.

c: Tap 2 wooden dowels **H** into the divider **9**.

Insert 2 large locking cam nuts **G** into the divider **9**.

Note: The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.







Turn the divider over

d: Fit a CR runner **Pb** to the divider **9**.





The 1st screw **J** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **J** use the holes that line up with the other panel holes.

e: Mark the top hole of the runner **Pb** with a bradawl and then fit a screw **E**.

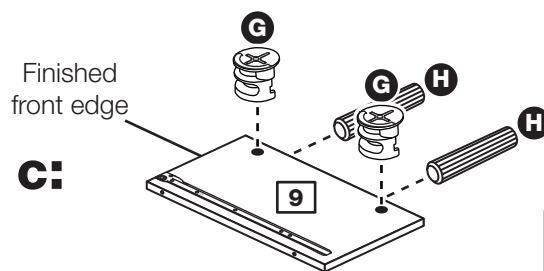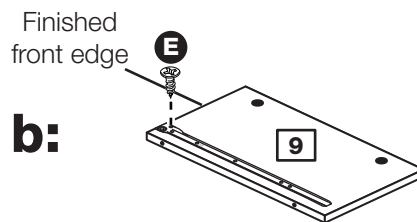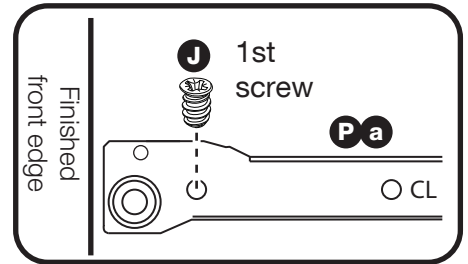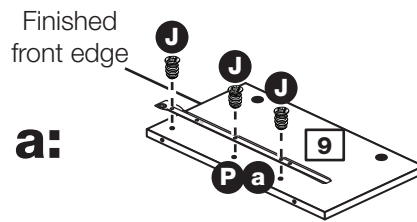

Turn the divider over

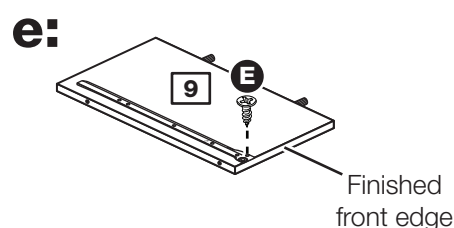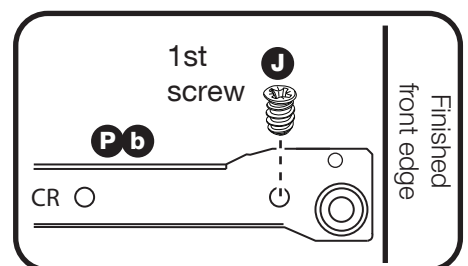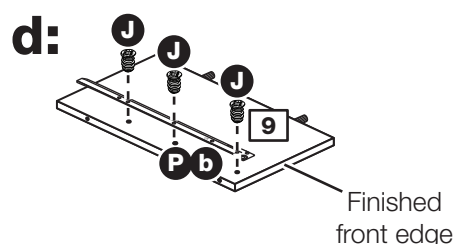

Assembly Instructions


Step 16

Fit the divider to the fixed shelf

Fit the divider **9** onto the fixed shelf **13**.

Use a screwdriver to tighten the 2 large locking cam nuts **G** fitted to the divider **9**.

Note: Turn the large locking cam nuts **G** as far as they will go - more than 1/2 a turn.

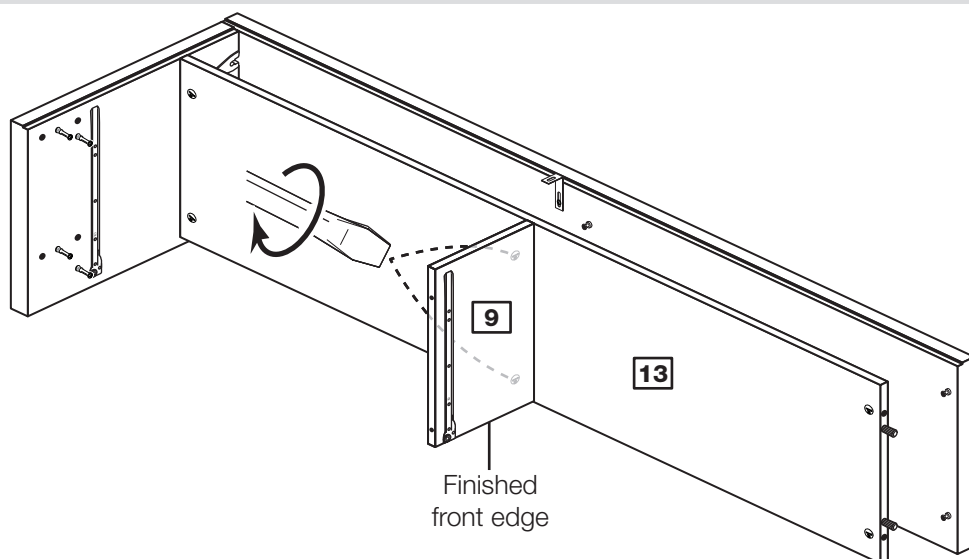


Step 17

Prepare the bottom rail

Tap 2 wooden dowels **H** into the bottom rail **14**.

Insert 2 large locking cam nuts **G** into the bottom rail **14**.

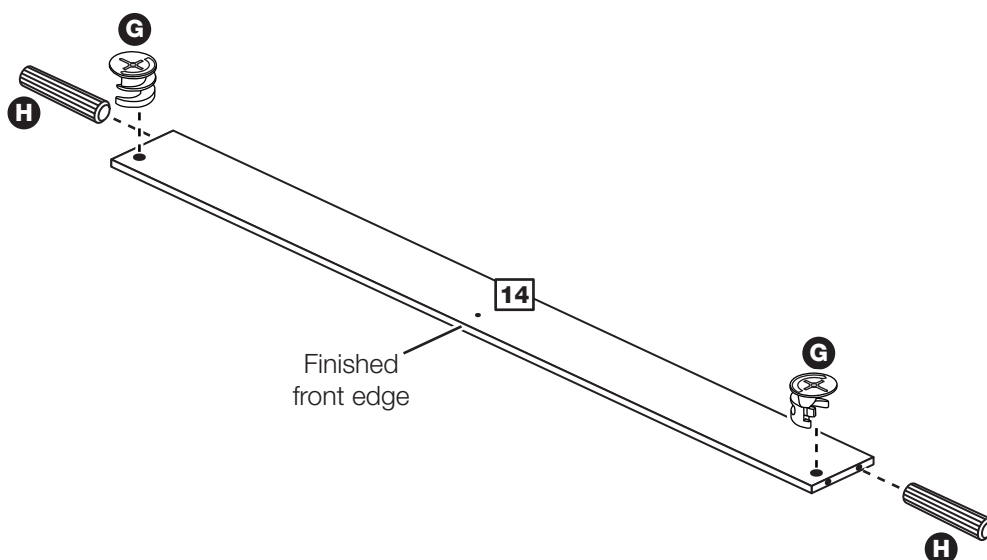


Step 18

Fit the bottom rail

Push the bottom rail **14** onto the right side **8**.

Use a screwdriver to tighten the large locking cam nut **G** fitted to the bottom rail **14**.

Attach the bottom rail **14** to the divider **9** using screw **I**.

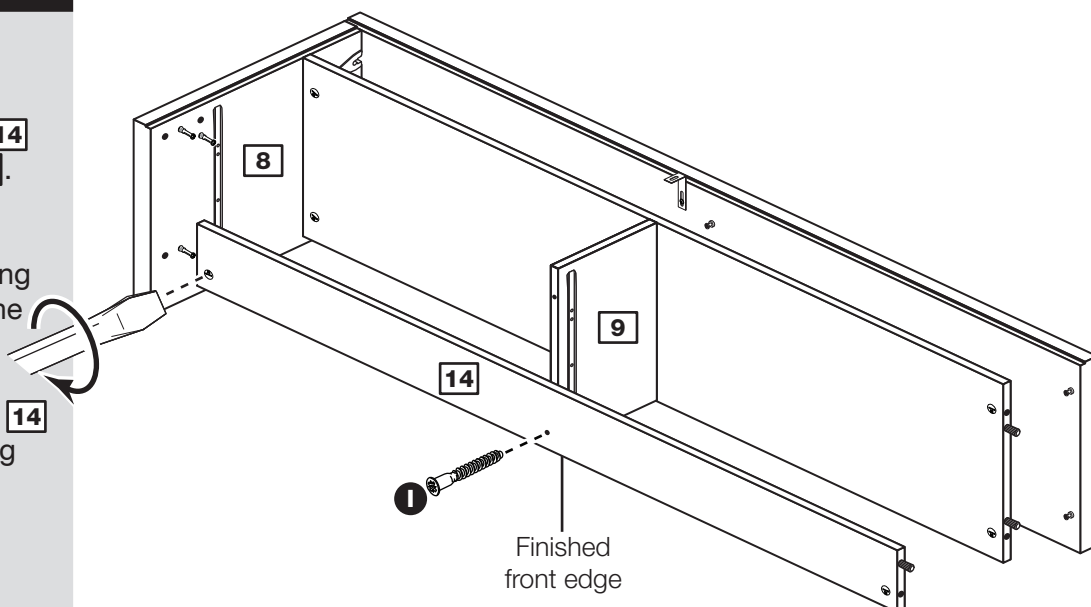


Assembly Instructions

Step 19

Prepare the back rail

Tap 2 wooden dowels **H** into the back rail **15**.

Insert 2 large locking cam nuts **G** into the back rail **15**.

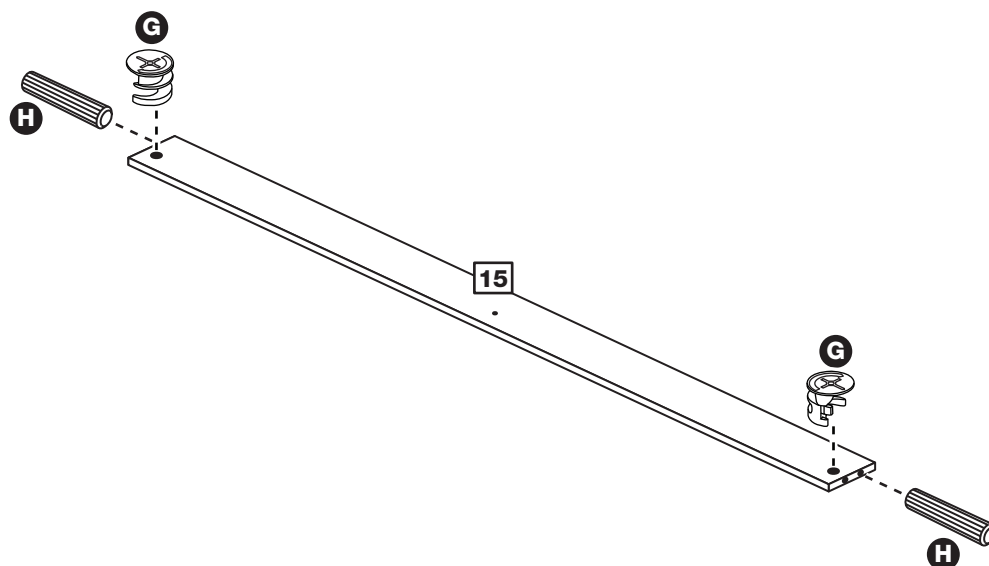


Step 20

Fit the back rail

Push the back rail **15** onto the right side **8**.

Use a screwdriver to tighten the large locking cam nut **G** fitted to the back rail **15**.

Attach the back rail **15** to the divider **9** using screw **I**.

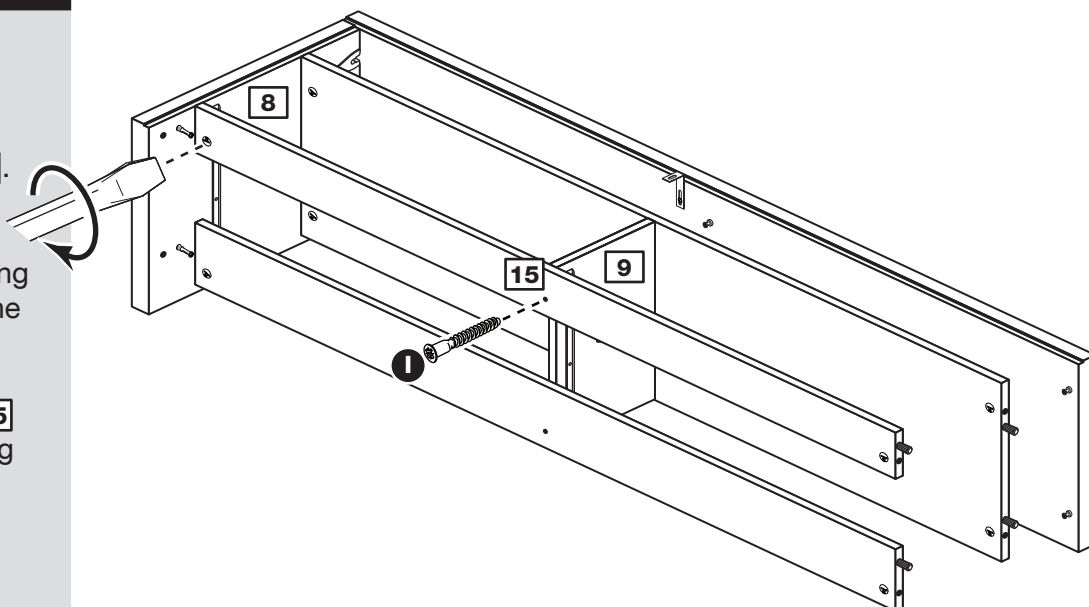


Step 21

Prepare the 2 plinth rails

Tap 2 wooden dowels **H** into both of the 2 plinth rails **16**.

Insert 2 large locking cam nuts **G** into both of the 2 plinth rails **16**.

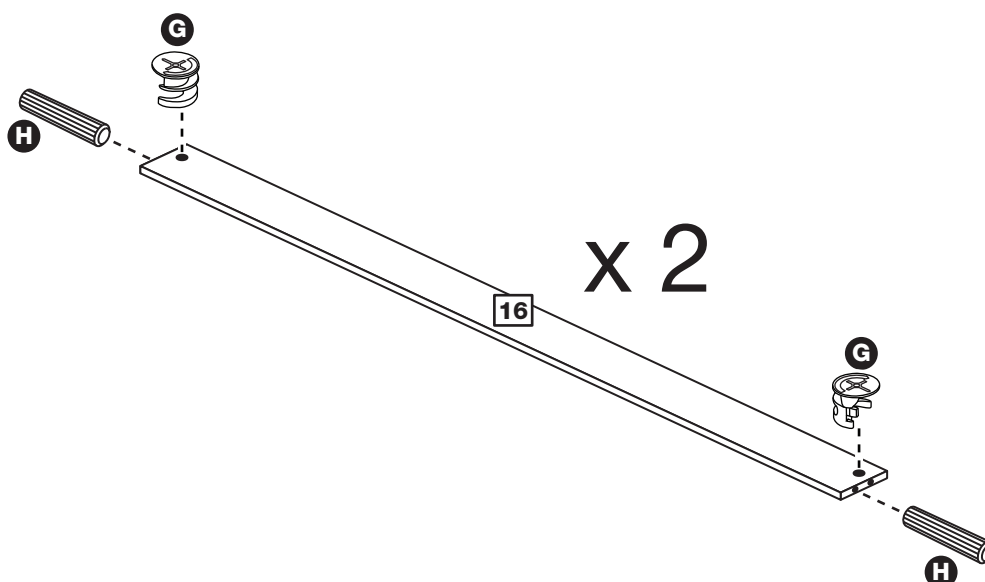

Assembly Instructions

Step 22

Prepare the left side

a: Fit a CL runner **Pa** to the left side **7**.

The 1st screw **J** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **J** use the holes that line up with the other panel holes.







b: Mark the top hole of the runner **Pa** with a bradawl and then fit a screw **E**.

c: Screw 6 metal dowels **A** into the left side **7**.

d: Push 2 hollow core locking nuts **K** into the left side **7**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **K**.

Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **K**.

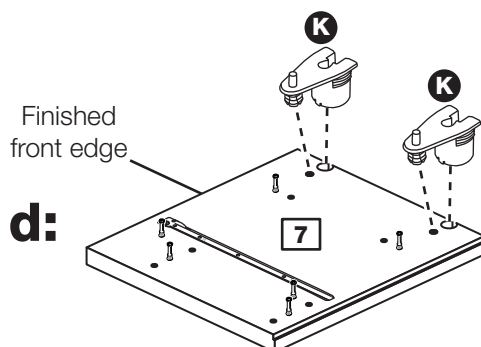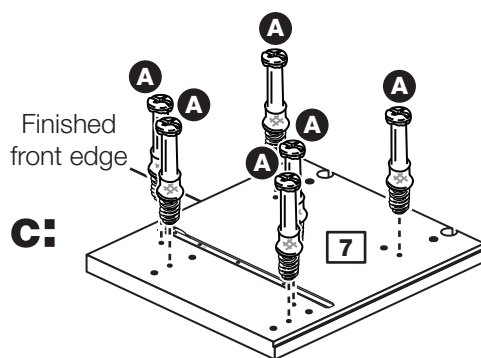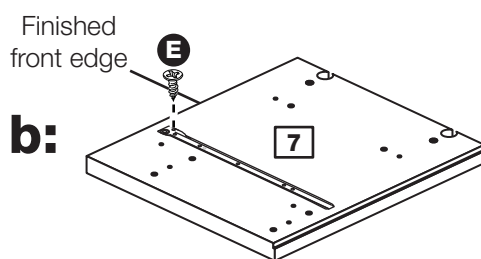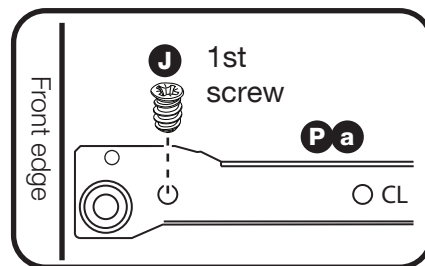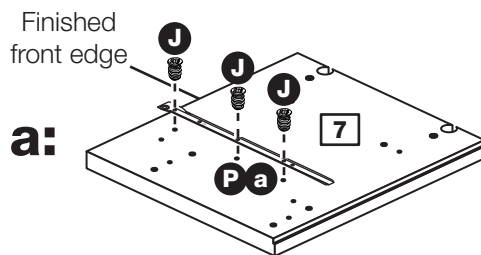


Assembly Instructions

Step 23

Fit the 2 plinth rails

Push the 2 plinth rails **16** onto the right side **8**.

Use a screwdriver to tighten the large locking cam nut **G** fitted to each plinth rail **14**.

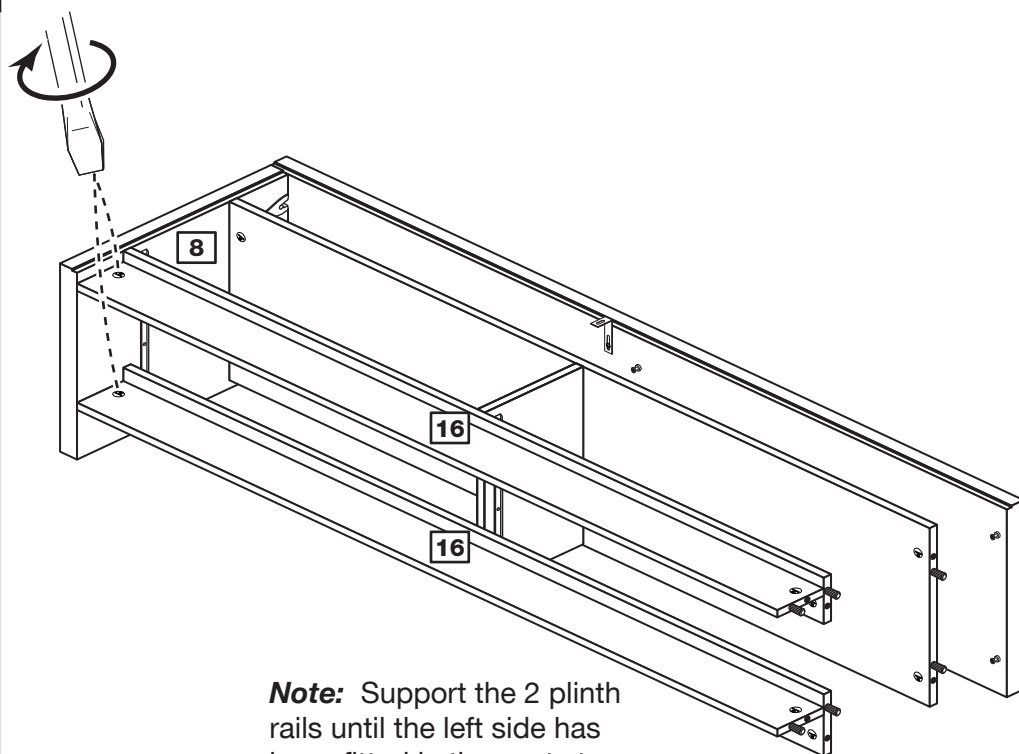

Note: Support the 2 plinth rails until the left side has been fitted in the next step.

Step 24


Fit the left side

Push the left side **7** onto the assembly.

The 2 hollow core locking nuts **K** fitted to the left side **7** must slide over the 2 small metal dowels **L** fitted to the top **11**.

Insert a screwdriver into the 2 hollow core locking nuts **K** and turn the nuts inside as far as they will go.

Use a screwdriver to tighten the 6 large locking cam nuts **G** fitted to the fixed shelf **13**, the bottom rail **14**, the back rail **15** and the 2 plinth rails **16**.

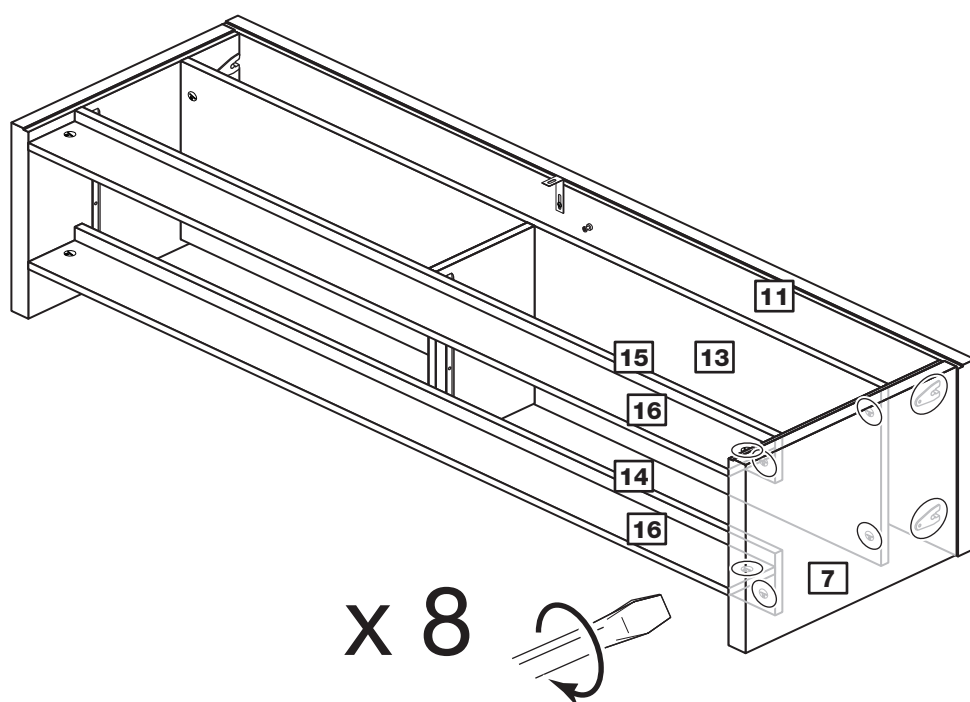



x 8

Assembly Instructions

Step 25

Prepare the small divider


Press 4 wedge fixes **M** into the small divider **10**.

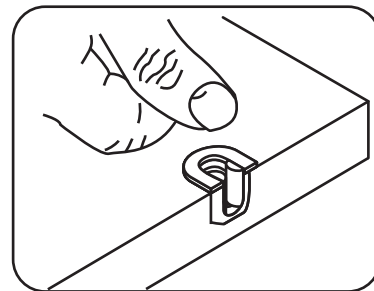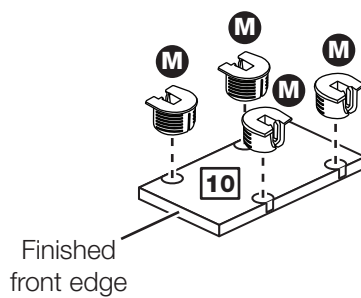

Step 26

Fit the small divider

Place the small divider **10** between the top **11** and the fixed shelf **13** and gently push it onto the small metal dowels until it clicks into place.

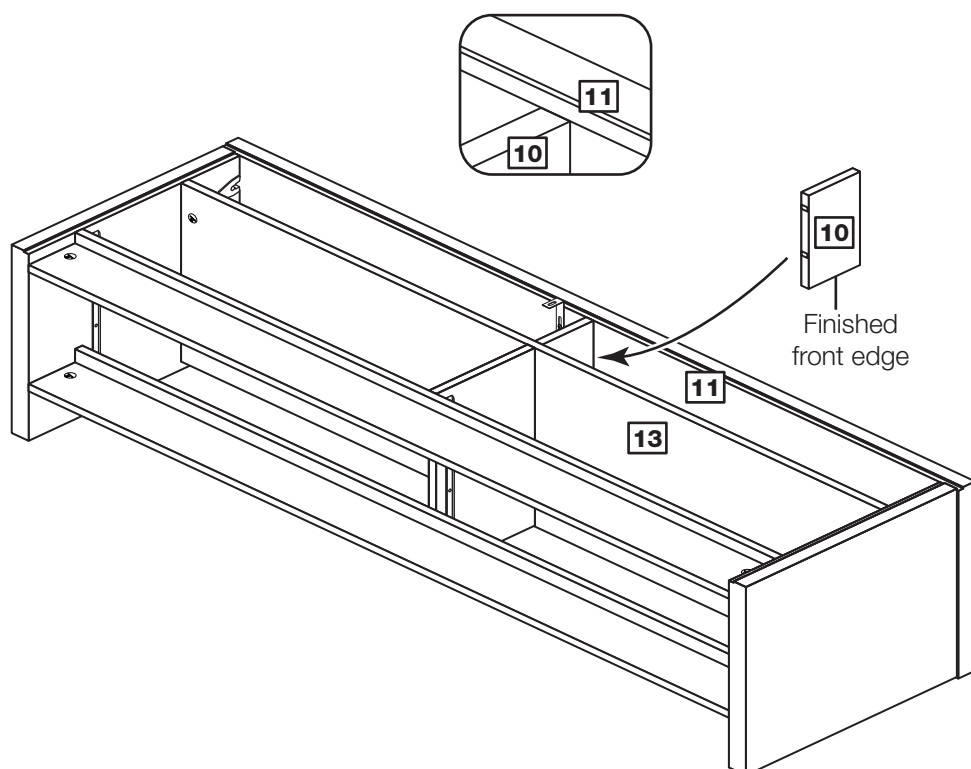

Assembly Instructions

Step 27



Squaring up a Chest and fitting the Back Panel

www.youtube.com/watch?v=Feal6541z7o

Fit the back panels

a: Square up the unit by making sure that measurement **x:x equals y:y**.

Place the 2 backs **12** onto the unit as shown.

Make sure that they sit in the rebate and are pushed up tight against the side and top panels.


b: Nail around the 3 outside edges of each back **12** as shown using the nails **N**.

Carefully stand the unit up for the next step.



Warning: The unit is heavy. Lift with care.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

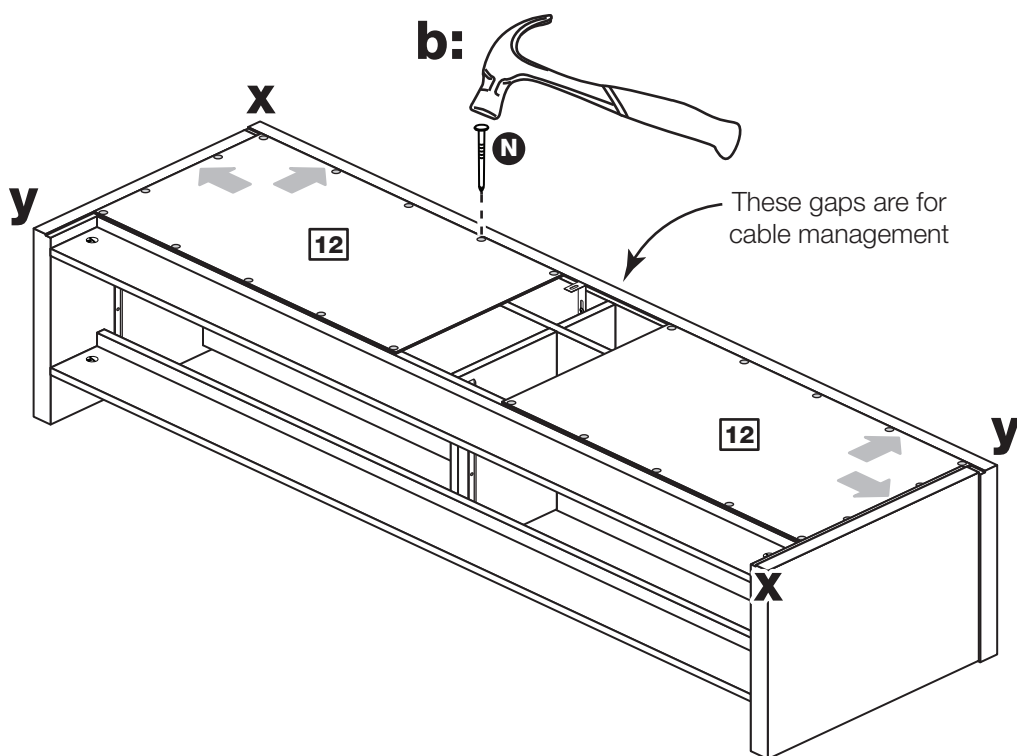

Assembly Instructions

Step 28

Secure the unit to a wall

a: Before fitting the unit to a wall, use a spirit level to check the top of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level.

To prevent possible overbalancing this unit **must be secured** to a suitable wall by fitting of the overbalance protector kit **Q** to a wall.

b: Push the unit up against the wall and slide the bracket against the wall. Fit the 2nd screw into the underside of the top panel.

Mark the slot at the back of the bracket for drilling into the wall.


Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.



WARNING!

In order to prevent overturning this product must be used with the wall attachment device provided


a:

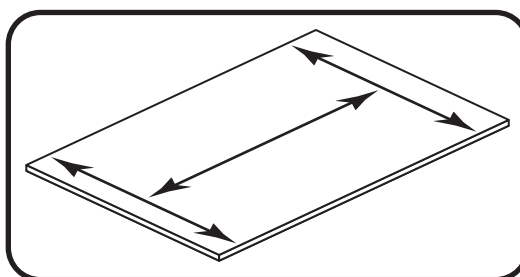

b:




See the next page for a guide to wall mounting and fixings

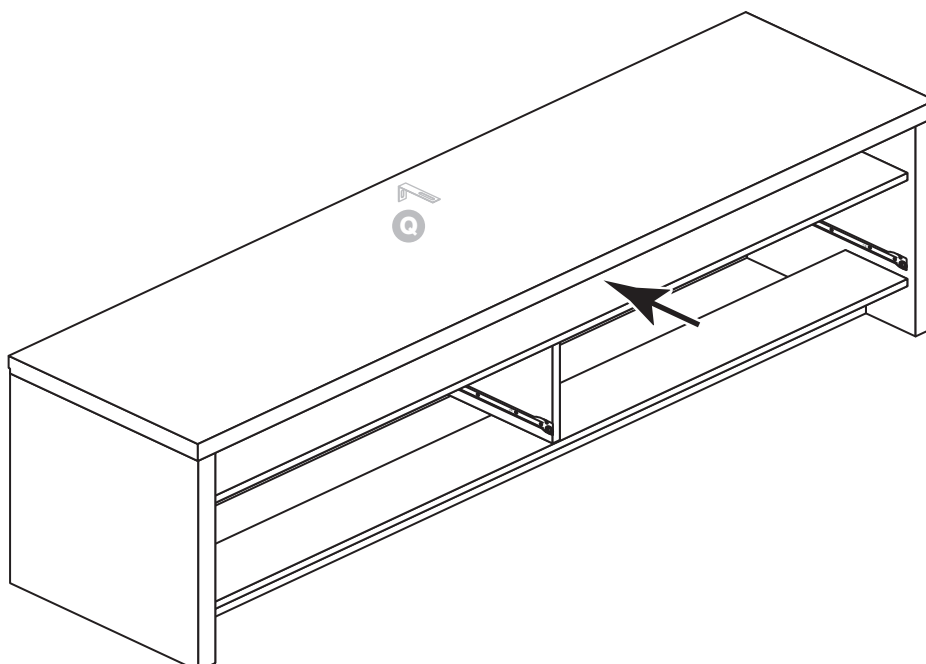

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule: Always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

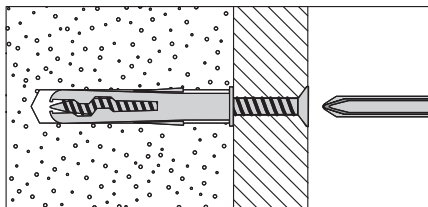


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

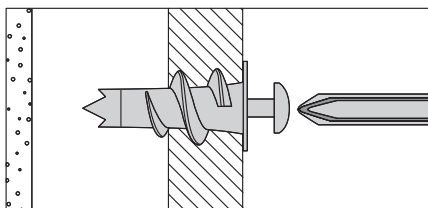


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

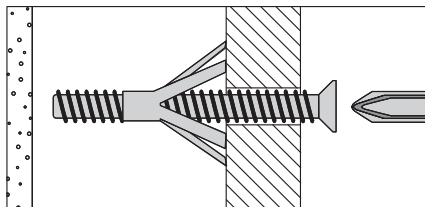


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

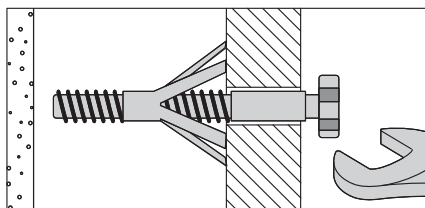


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

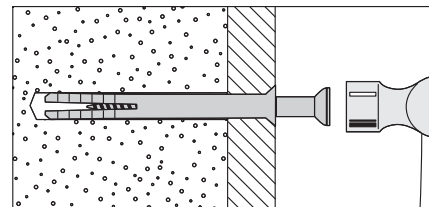

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

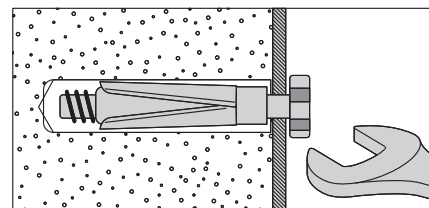

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.

Assembly Instructions

Step 29



Fit the drawers

Slide the wheels of the runners fitted to the drawers, over the wheels of the runners fitted to the side panels and push the drawers into position



Fixing Bottom Mounted Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

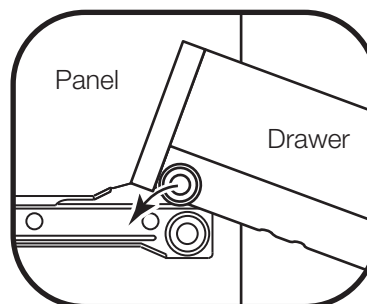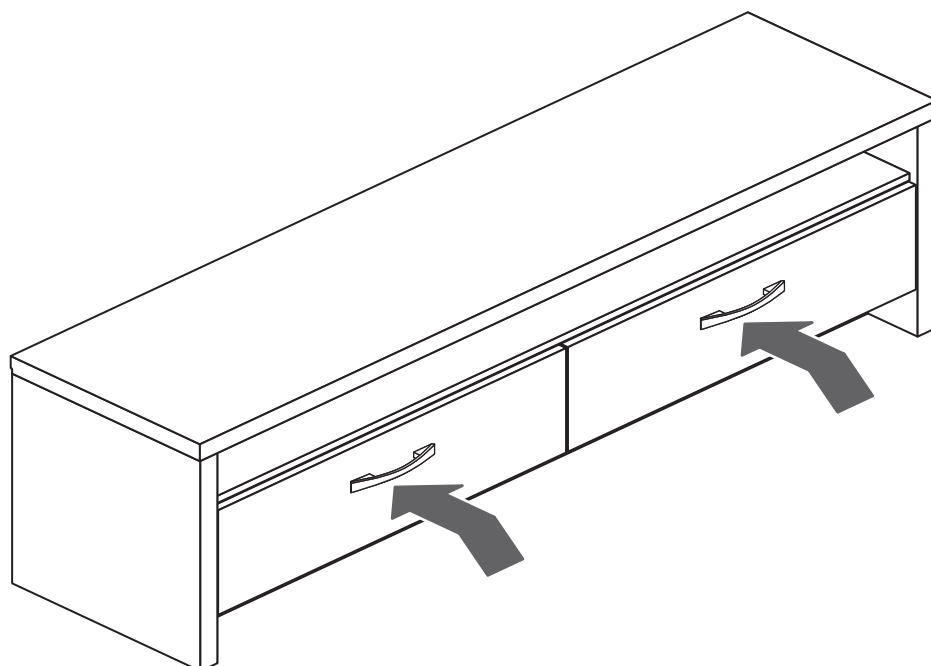

Assembly is complete

Please remove any blue protective film from panel edges and clear protective film from panel surfaces

