
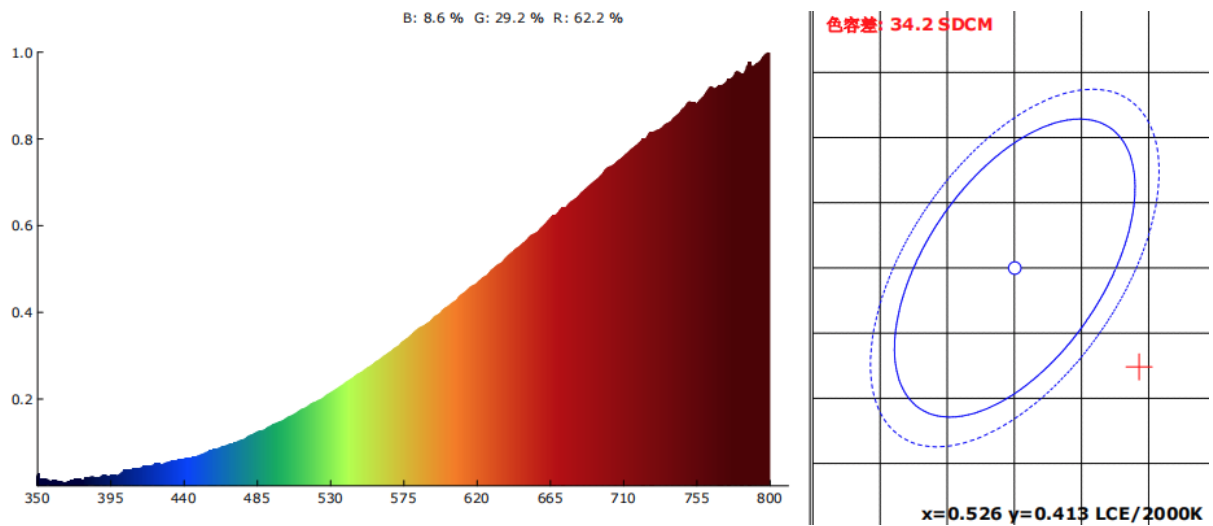


Supplier's name or trade mark: Schylling Inc			
Supplier's address: 21 High Street, Suite 400, North Andover, MA 01845			
Model identifier: 5026 BULB, 2000 SERIES AND 4000 SERIES LAVA LAMPS			
Type of light source: Incandescent light			
Lighting technology used:	[other]	Non-directional or directional:	[DLS]
Light source cap-type (or other electric interface)	[E14]		
Mains or non-mains:	[MLS]	Connected light source (CLS):	[no]
Colour-tuneable light source:	[no]	Envelope:	[non-clear]
High luminance light source:	[no]		
Anti-glare shield:	[no]	Dimmable:	[no]
Product parameters			
Parameter	Value	Parameter	Value
General product parameters			
Energy consumption in on-mode (kWh/1,000 h) rounded up to the nearest integer	25W	Energy efficiency class	[D]
Useful luminous flux ( $\Phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in [sphere/wide cone/narrow cone]	Correlated colour temperature, rounded to the nearest 100K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set	[2500K]
On-mode power ( $P_{\text{on}}$ ), expressed in W	25W	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal point	NA
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal point	NA	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	[99.6]
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	60	 R39 230V25W.png
	Diameter	38	
Claim of equivalent power (see paragraph [2(1) and (2)])	[yes/-]	If yes, equivalent power (W)	x
		Chromaticity coordinates (x and y)	x.0.4743  y.0.4124
Parameters for directional light sources:			
Peak luminous intensity (cd)		Beam angle in degrees, or the range of beam angles that can be set	[60]
Parameters for LED and OLED light sources:			
R9 colour rendering index value	x	Survival factor	x.xx
The lumen maintenance factor	x.xx		

Parameters for LED and OLED mains light sources:			
Displacement factor (cos $\phi$ 1)	x.xx	Colour consistency in McAdam ellipses	x
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage (see paragraph [2(3)]).	[yes/-]	If yes then replacement claim (W)	x
Flicker metric (Pst LM)	x.x	Stroboscopic effect metric (SVM)	x.x



**Note:** At the end of its life this light source should be taken to the nearest household waste recycling or civic amenity centre. Do not dispose in your household waste.