







# Snug

EN **BBABY SEAT FOR BICYCLE**  
FRAME FIXATION



TOOLS REQUIRED FOR ASSEMBLY ARE A 13mm SPANNER & A 5mm ALLEN KEY

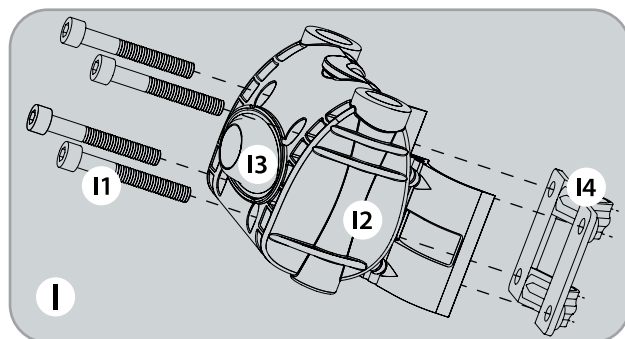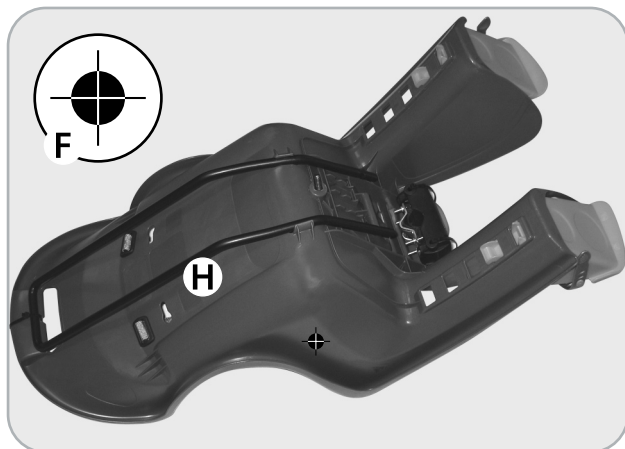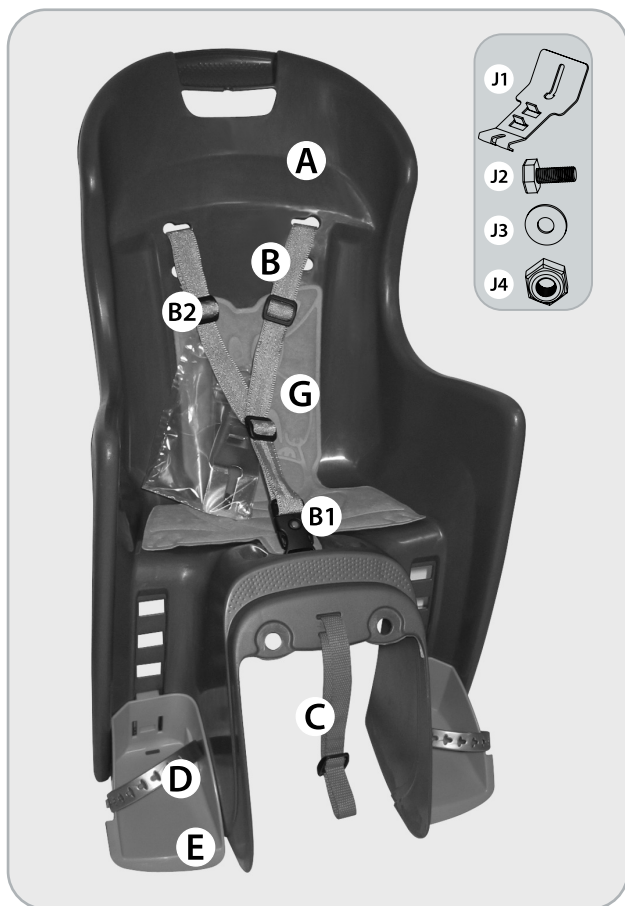

#### EN - INDEX

- A. Main seat
- B. Safety belt
- B1. Safety lock
- B2. Belt adjuster
- C. Safety belt for bicycle frame
- D. Foot rest strap
- E. Foot rest
- F. Gravity centre
- G. Cushion
- H. Metallic bracket
- I. Fixation block
- I1. Screws
- I2. Plastic fixation block
- I3. Block button
- I4. Metallic fixation plate
- J. Metallic fixation Kit
- J1. Metallic fixation plate
- J2. M8x25 screw
- J3. M8 washer
- J4. M8 nut

### Avenir - Snug

Congratulations for purchasing an Avenir product.

We created this baby seat with your child's comfort and security in mind so that your rides become great moments of pleasure and joy.

This seat is built to carry children with a maximum weight of 22kg / 48,5 lbs or up to 7 years old. Check regularly your child's weight and never carry a child weighing more than the recommended.

**This document contains information and instructions for assembling the seat in a safe manner**

#### TECHNICAL CHARACTERISTICS


**- The seat cannot be mounted on bicycles with rear shock absorbers.**

- It can be mounted on bicycles with wheels with a diameter of 26" and 28".

- It can be mounted on bicycles with round and oval tubular frames, with a diameter between 28mm and 40mm.

- The seat cannot be mounted on bicycles with luggage carriers wider than 175mm.

- If you have any doubts regarding the assembly of this seat on your bicycle, we recommend you obtain further information from your bicycle retailer.

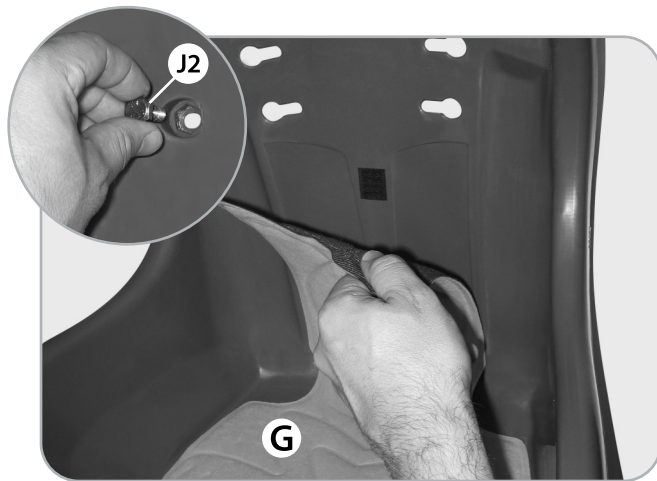

EN


Open the bag, lift the baby seat cushion (G) and put the screw (J2) in the hexagon hole, the same as in the picture.



EN


Turn over the seat as shown in the picture.

03

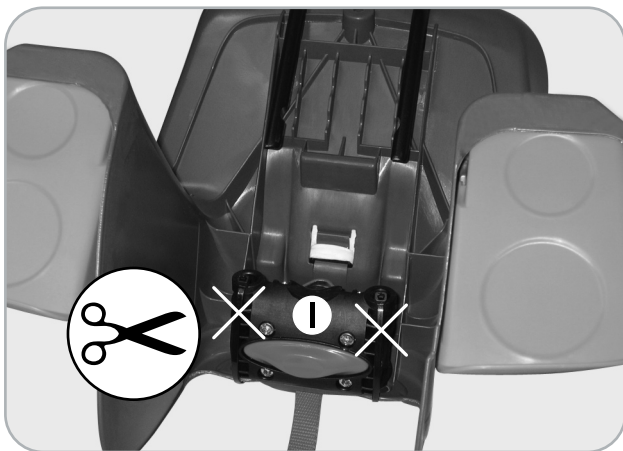


EN  
Remove the fixation block (I) by cutting the two straps.

05

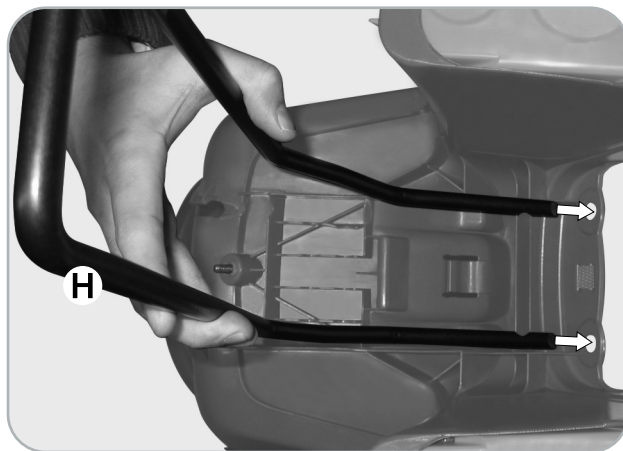


EN  
Hold the metallic bracket (H) the same as in the picture and pass it through the opening in the baby seat.

04

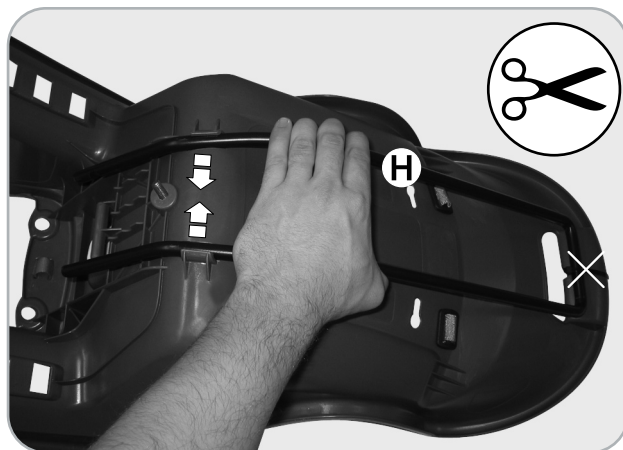


EN  
Remove the metallic bracket (H) by cutting the strap, and remove it from the fixation clips.

06

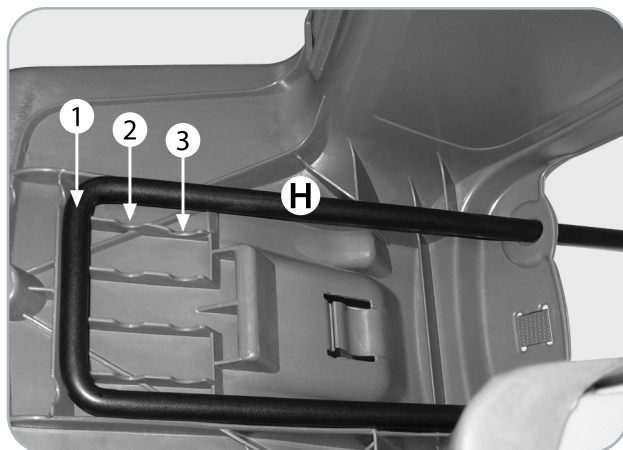

EN  
In order to adjust the baby seat onto the bicycle, put the metallic rod into one of the three allowed positions.

07

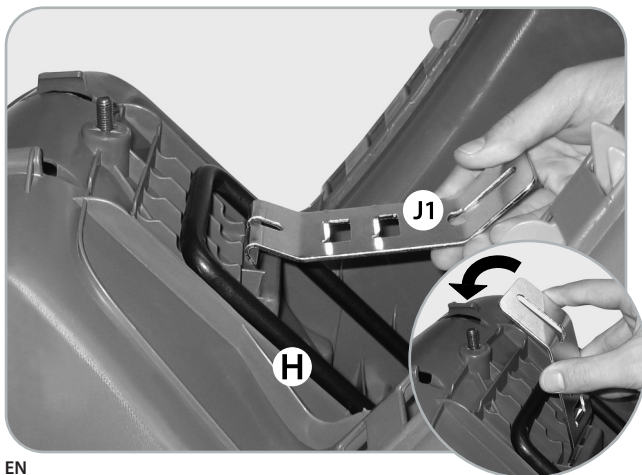


EN  
Insert the metallic fixation plate (J1) on the grooves of the baby seat, and close it as indicated in the picture.

08




EN  
Insert the washer (J3) and tighten the nut (J4) on the screw. Make sure the nut is well tightened and the metallic bracket is firmly fixed.

09

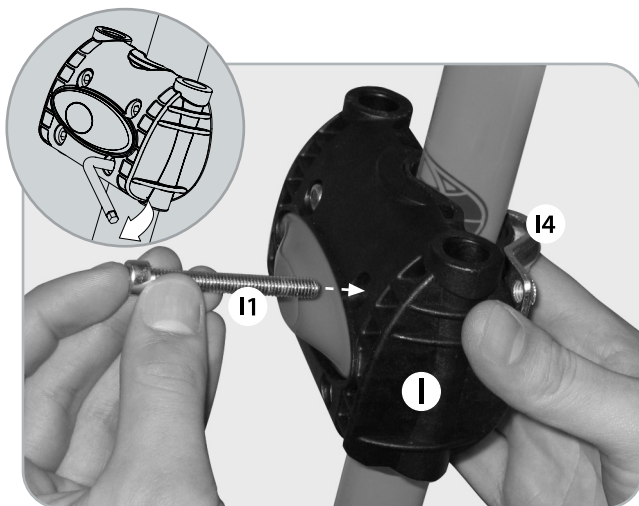


EN  
Put the fixation block (I2) on the front of the bicycle frames seat tube. Screw the fixation block (I2) onto the metallic fixation plate (I4) in such a way it may be adjusted later.

10

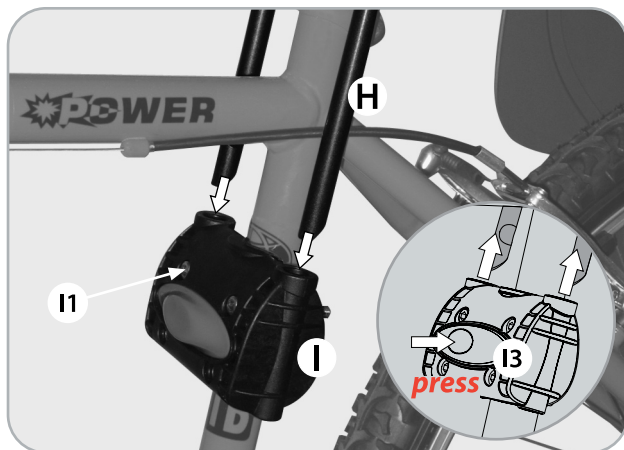


EN  
Insert the ends of the metallic bracket (H) into the holes of the fixation block (I) until you hear a click that signals it is in the locked position. Centre and adjust the seat above the rear wheel. Make sure the seat does not touch the rear wheel when you add the child's weight. Tighten the screws (I1) securely. Try to shake the seat to make sure it is secure on the bicycle. To remove the seat, press the block button (I3) and remove it according to the direction indicated in the picture.




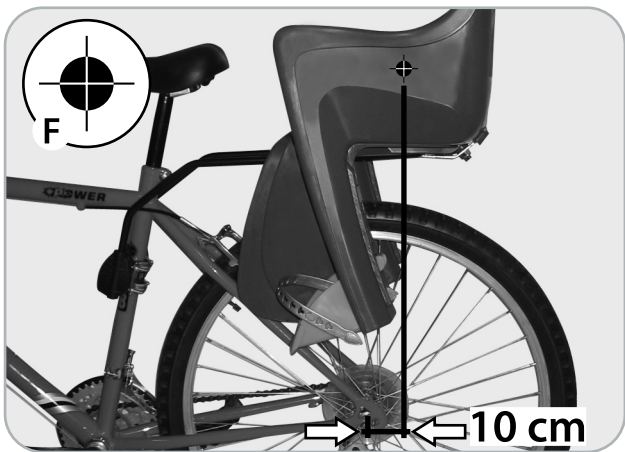


EN  
The seat has a gravity centre (F) (engraved on the seat) which cannot be more than 10cm away from the axle of the rear wheel. In case the gravity centre is at a longer distance, position the seat in another of the available positions (go back to page 9). Pay attention to the positioning of the seat; it must be adjusted so that the cyclist does not touch the seat when pedaling.

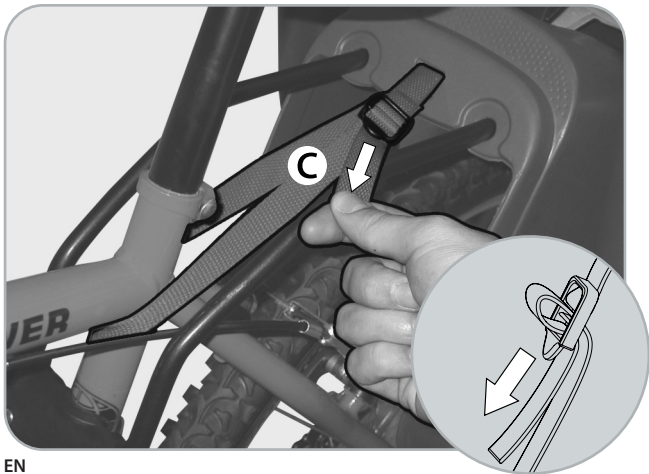


EN  
Pass the safety belt (C) around the bicycle frame. Adjust it as shown in the picture, under tension.

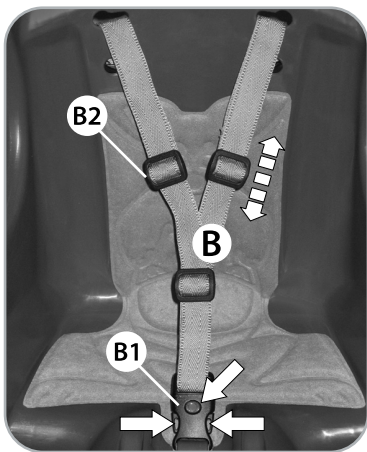

EN  
To put the child in the seat, open the lock (B1) of the safety belt (B) and press the three buttons of the lock (B1) as indicated. Before starting your ride, make sure the seat belt is properly adjusted and that it does not hurt the child. This adjustment is made by sliding the belt adjustors (B2).

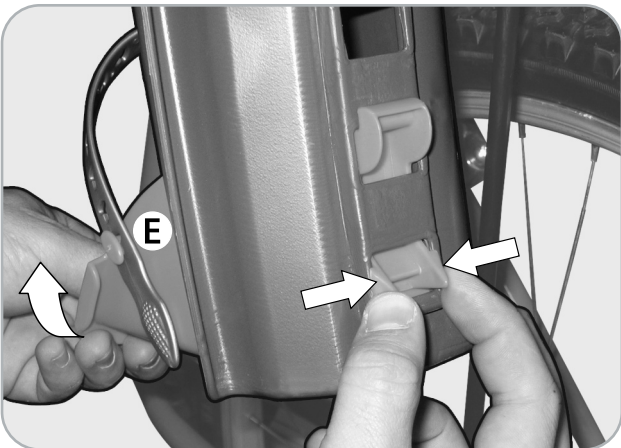

EN  
To adjust the height of the foot rest (E) that suits your child's size, release the foot rest (E) from the seat (A) by pressing the two fasteners together and lift the foot rest as indicated in the picture ( it may be necessary to apply some pressure).

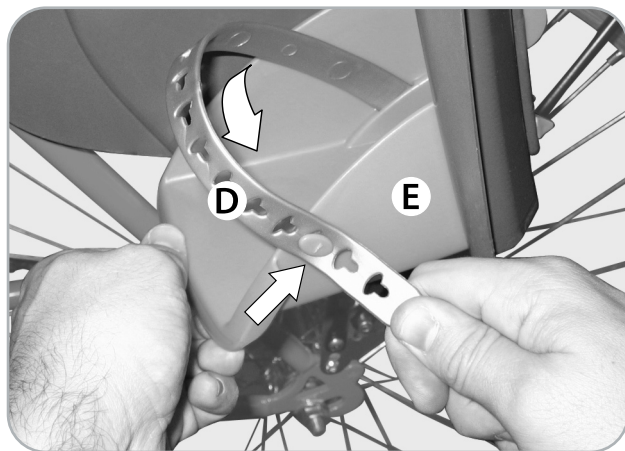

EN

To guarantee your child's safety, adjust the strap (D) of the foot rest. Unlock the strap (D) and adjust it to the child's foot. Lock it again making sure the strap does not hurt the child.

## MAINTENANCE

To keep the baby seat in good working conditions and to prevent accidents we recommend the following:


- Check regularly the fixation system of the seat to the bicycle in order to make sure it is in perfect condition.
- Check all the components to see if they work properly. Do not use the seat if any of the components are damaged. Damaged components must be substituted.
- Clean the seat with soap and water (do not use abrasive, corrosive or toxic products).

## SAFETY INSTRUCTIONS AND WARNINGS

- The bicycle rider must be at least 16 years of age;
- The baby seat is only suitable for transporting children with a maximum weight of 48.5 lbs / 22 kg, with an age limit of 7 years. Check the child's weight regularly and do not carry a child that weighs more than this.
- Do not carry a child less than 12 months of age, in this baby seat. To be a passenger, the child must be able to sit up straight with the head held upright while wearing a bicycle helmet.
- Check if all parts of the bicycle function correctly with the baby seat mounted.
- Do not install this baby seat on a racing bicycle.
- Secure the child on the baby seat ensuring that all the safety belts and straps are fastened firmly but not so tight as to cause discomfort to the child;
- Make sure the seat stays slightly reclined towards the back and not towards the front, to avoid the child from slipping
- The baby seat must never be used before adjusting the safety belt.
- Do not allow any part of the child's body or clothing, shoelaces, baby seat belts, etc. to come in contact with moving parts of the bicycle because this could harm the child or cause accidents.
- You are recommended to mount the seat on bicycles supplied with wheel-covers, in order to prevent the child from inserting his feet or hands into the wheel's spokes. It is also recommended to use a saddle-cover or a saddle with internal springs, in order to prevent the child from crushing his fingers in the saddle springs.
- Dress the child with proper clothes according to weather conditions and use an appropriate helmet.
- The seat has a marking of the centre of the gravity. After fitting a child seat to a bicycle, this marking cannot be behind the rear wheel axle more than 10 cm. Make the adjustment through the alteration of the position of the baby seat in one of the 3 positions available.
- When the baby seat is not in use, fasten the waist buckle of the security harness to prevent the straps from dangling and entering in contact with any turning parts of the bicycle such as wheels, brakes, etc. as these may be a hazard to the cyclist.
- For safety reasons any modification of the seat is not advisable.
- Never leave a child in the seat unattended to.
- Don't carry supplementary luggage that surpasses the load capacity of the bicycle, never carry the supplementary luggage on the baby seat. In case you can't do without it, carry it in front of the rider.
- The rider should pay special attention to the different performance of the bicycle when the baby seat is being used.
- Check regularly the condition of the screws and substitute them if necessary according to the mounting instructions; don't use the baby seat if any part is broken.
- The position of the baby seat must be adjusted so that the bicycle rider does not touch the baby seat with the feet when in motion.
- The weight of the rider and the child carried must never be more than the maximum load allowed for the bicycle. Check the bicycle instruction manual from the bicycle supplier to make sure the bicycle supports this additional load.
- You must cover any sharp or pointy object of the bicycle that may be reached by the child
- The seat and cushion can get hot if under the sun for a long time. Make sure that they aren't too hot before seating the child.
- When transporting the bike on luggage racks or bicycle racks on the car roof or boot door, always take the child seat off the bike. The drag could damage the bicycle or child seat or tear it off the bicycle.
- Check that the seat functions correctly when mounted.
- Check the laws and regulations in your country, related to carrying children in seats attached to bicycles.





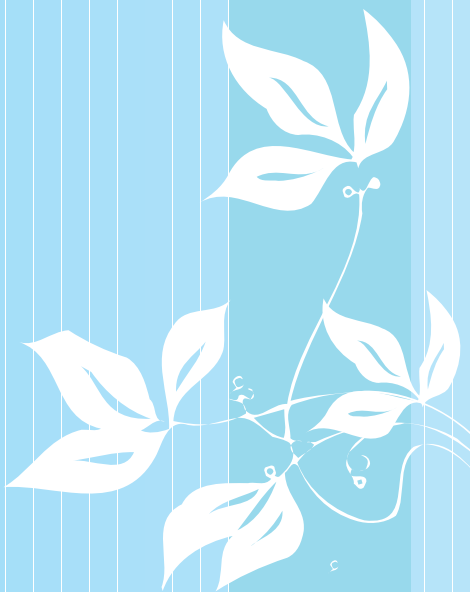

**Snug**

Distributed by Raleigh UK Ltd  
Parts and Accessories, Nottingham, NG16 3HT  
[www.raleigh.co.uk](http://www.raleigh.co.uk)  
made in Portugal