

GUILD SACK BARROW 60kg

Instruction Manual

GZS70S



GUILD

After Sales Support

UK/Ireland 0345 640 0800

Important - Please read these instructions fully before operating or maintaining your Guild sack barrow

Note the safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Please keep instructions safe for future use. If you need help or have damaged or missing parts, call the Customer Helpline on 0345 640 0800

Contents

Safety instructions.....	3
Specifications.....	3
Assembly & use.....	4

Safety instructions

- ✓ Always load evenly with the centre of gravity of the load as near the centre of the truck as possible.
- ✓ Obtain additional support for large or wide loads to prevent tipping.
- ✗ **DO NOT** overload the truck - see Specifications.
- ✗ **DO NOT** leave unattended, especially when loaded, unless the wheels are chocked or the truck is otherwise secured.
- ✗ **DO NOT** use truck on uneven ground and do not run over curbs or steps - use a ramp.
- ✗ **DO NOT** allow others to ride on the truck.
- ✗ **DO NOT** use the truck if any part is significantly damaged - pay particular attention to the wheels.

Specifications

Lightweight aluminium frame, weighs only 3.2kg yet has a carrying capacity of 60kg. Folding steel foot plate and telescopic handle with spring release means that trolley can be packed away in seconds. Large back support makes light work of oversized loads. Fitted with Ø150mm wheels for easy rolling over rough ground. Ideal for business and home use.


Max. Load:	60kg
Wheel Diameter:	134mm
Height Folded:	710mm
Height Extended:	960mm
Width:	380mm
Footplate Width:	380mm
Footplate Depth:	235mm

Assembly & use

The wheels of the product have been installed. If you want to remove them, please follow the following steps.

1. How to open


- Press the centre button. Whilst pressing the button, pull the upper handle upwards. This might require a bit of force.
- Using your foot, start pushing the nose palte forwards. The wheels should unfold automatically.

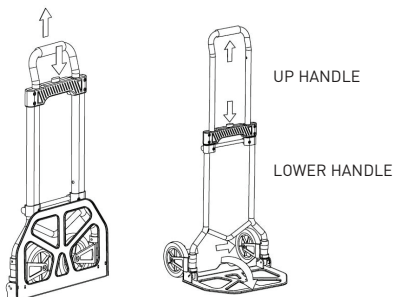

Assembly & use

1. How to fold

- Press button in center.
- Push upper handle downward.
- Push the sack barrow slight forward allowing the nose plate to start folding. Push it all the way to full fold the product.

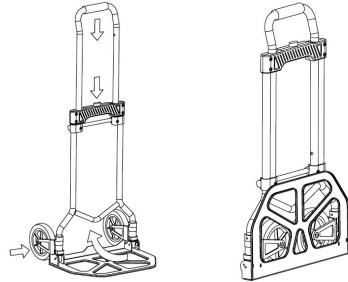

WHEN FOLDING AVOID USING YOUR HAND



ONCE OPEN, PULL THE UPPER HANDLE ALL THE WAY BEFORE STEPPING THE NOSEPLATE

