
210mm

Fitting Instructions for Double Mirror Doored Cabinet Important : KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE

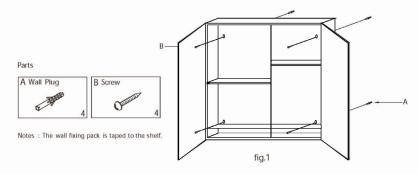

Safety Information

- 1. Installation of this product must be carried out by a competent person. You will need the assistance of a second competent person to install this cabinet.
- 2. Maximum loading of the cabinet is 10kg.
- 3. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill wandering, particularly on tiled surfaces.
- 4. When drilling into walls always check that there are no hidden wires, pipes etc. Make sure that the screws and wall plugs supplied are suitable to support the unit. Specialist fixings may be required. If in doubt consult a qualified tradesperson.

- 1. Place the cabinet in the chosen location, against the wall. Use a spirit level to ensure that the cabinet is
- 2. Ask the competent helper to hold the cabinet in position.
- 3. Push the cabinet door to the right side and use a pencil to mark the wall through each of the circular holes in the back of the cabinet.
- 4. Remove the cabinet from the wall.
- 5. Using the pencil marks, drill 4 holes. Using a suitable 6.3mm drill bit to a depth of 28mm.
- 6. Place a wall plug (A) in each hole and tap in with a hammer until flush with the wall
- 7. Ask the helper to hold the cabinet in position.
- 8. Using the screws (B) provided, fix the cabinet to the wall. Tighten all screws to secure the cabinet: See Fig. 1.

Warnings

- 1. Do not place very hot or very cold items against or in close proximity to glass surfaces unless adequately thick insulating material is used to prevent such items from coming into contact with the glass.
- 2. Do not strike the glass with hard or pointed items.
- 3. It is essential that this unit is fixed to a wall using the correct type of fixings. This product could be dangerous if installed
- 4. Do not sit or stand upon horizontal glass surfaces.

Care Instructions

When cleaning stainless steel panels or mirrors, use a damp cloth or leather and mild washing up liquid or soft soap if

Do not use washing powders or any other substance containing abrasives since these substances will scratch the surface or glass

This unit complies with BS 7449: (1991).

Produced for

Argos Ltd. 489-499 Avebury Boulevard Saxon Gate West Central Milton Keynes Bucks, MK9 2NW


Cat. No : 833-1087 (D) Manufacture Date

This unit contains film backed mirrored doors of a nominal thickness of 3mm which is not required to be classified to RS6206 Class C.

If a glass is chipped or broken, replace with glass of the type described on this label. Consult the manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the model number, and batch number or date of manufacture.

A Guide to

Wall Mounting & Fixings



IMPORTANT:


When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.

- 1) General Rule Always use a larger screw and wall plug if you are not sure.
- 2) Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3) Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4) Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
- 5) Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types Of Walls


You can use one of the following types of wall plug if your walls are made of brick breeze block concrete stone wood or plaster board.

No.1 "Standard" Wall Plug **General Wall Materials**



These come in various sizes and are made from plastic or sometimes wood fiber


No.2 "General Purpose" Wall Plug Aerated / Breeze Block



used to support heavy loads, use a specialist fitting in this case. For light loads, a General Purpose Plug can be used.


Generally aerated blocks should not be

No.3 "Shield Anchor" Wall Plug **Heavy Loads**




For use with heavier loads such as TV & HiFi Speakers and Satellite Dishes etc.

No.4 "Cavity Fixing" Wall Plug




For use with plaster board partitions o

No.5 "Cavity Fixing - Heavy Duty" Wall Plug



For use when fitting or supporting heavy loads such as shelving, wall cabinets, coat racks.

No.6 "Hammer Fixing" Wall Plug



For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall

CARE & MAINTENANCE

A SAFETY

Always check the fitting and location to ensure your safety in and around the home.

/!\ FITTING

From time to time check the fitting to ensure the wall plugs or screws do not become loose.