

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Home

**Supplier's address:** -

**Model identifier:** 3371822

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	580 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	6,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,413
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	-2	Survival factor	0,90
the lumen maintenance factor	0,96		

(a): not applicable;

(b): not applicable;

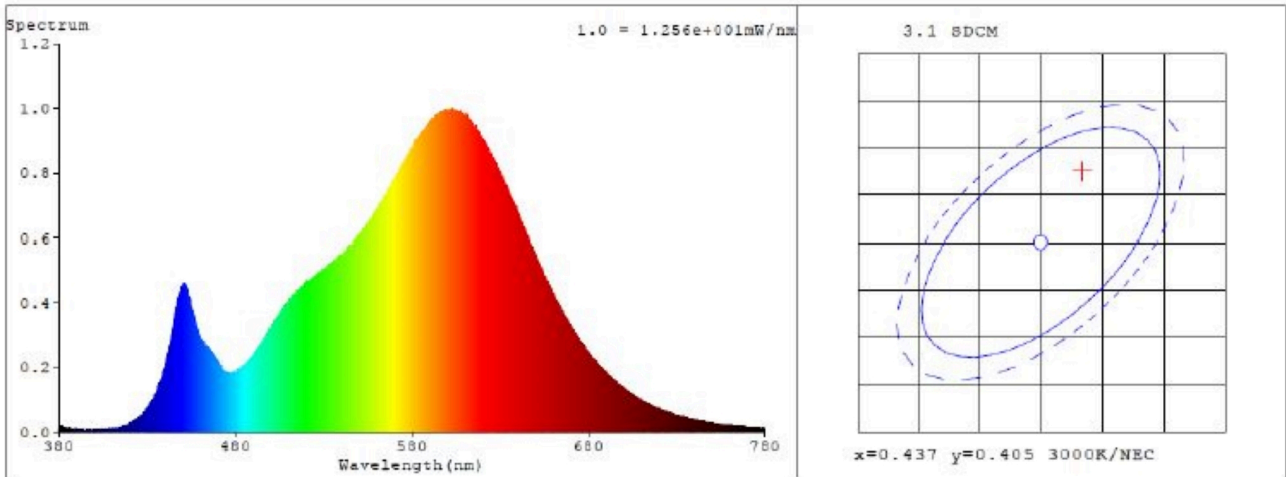

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4404$   $y = 0.4125$  /  $u' = 0.2492$   $v' = 0.5252$  ( $duv=2.84e-03$ )

CCT= 3010K Prcp WL: Ld=581.8nm Purity=56.0%

Peak WL: Lp=603nm FWHM: =125.0nm Ratio:R=22.4% G=75.1% B=2.5%

Render Index: Ra = 81.1

R1 =79	R2 =89	R3 =97	R4 =79	R5 =79	R6 =88	R7 =83
R8 =56	R9 =-2	R10=76	R11=78	R12=69	R13=81	R14=99
						R15=70