3 Door Tall Robe

Assembly Instructions - Please keep for future reference

274/9668


259/2468

239/2819

355/1288

330/5386

355/3262

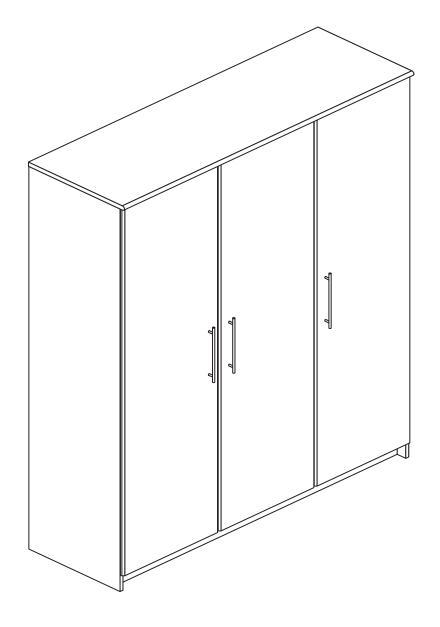

Dimensions

Width - 149.5cm

Depth - 50cm

Height - 199.5cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800



!\ Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Warning: This unit weighs approximately 89kgs. Please lift with care.
- Check you have all the components and tools listed on pages 1, 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



 We do not recommend the use of power drill/drivers for inserting screws,


as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Tools required

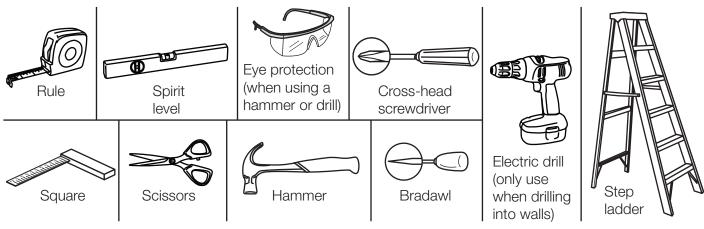


Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below

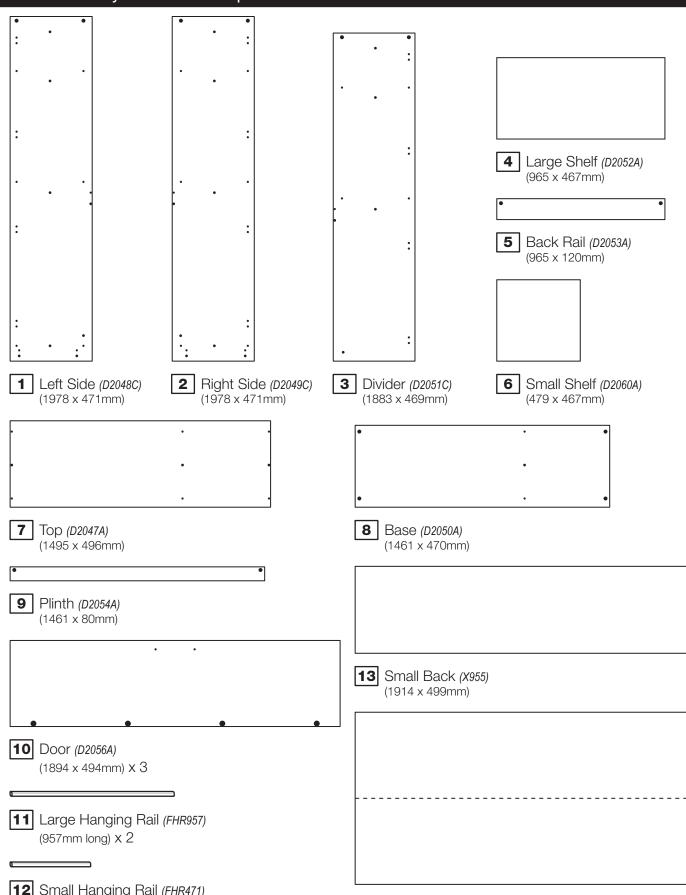



Small Hanging Rail (FHR471) (471mm long) x 2


Large Back (X956) (1914 x 988mm)


Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

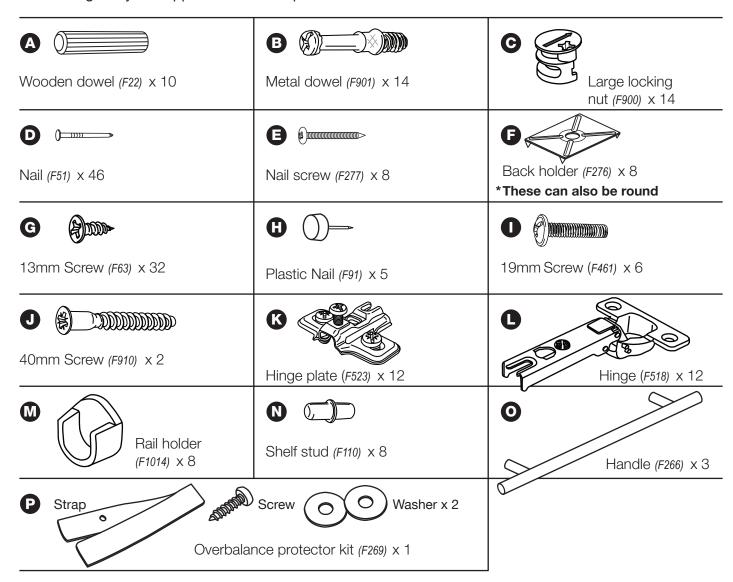

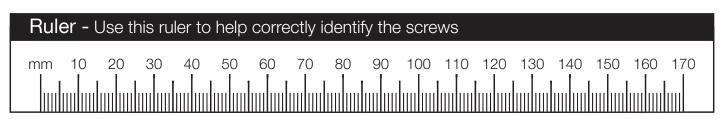

If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 03456 400800 quoting the reference numbers below

Step 1

Prepare the divider

Screw a metal dowel B into the divider 3.

Note: Tighten metal dowels up fully against the panel.


Fit 4 hinge plates **K** onto the divider 3, making sure that the slot is facing towards the finished front edge.

Insert 2 large locking nuts **©** into the divider 3.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

Tap 2 wooden dowels A into the divider 3.

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

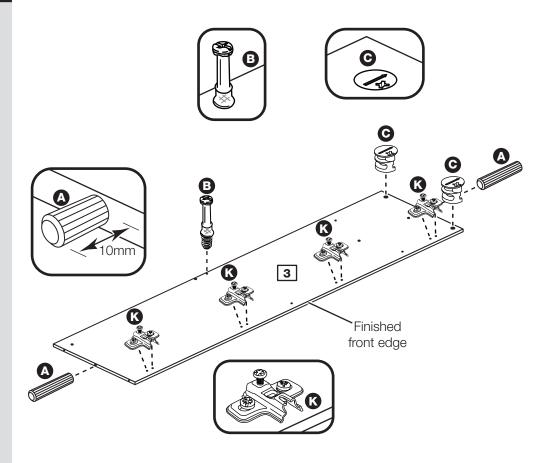


Step 2

Prepare the base

Insert 4 large locking nuts **©** into the base **8**.


Tap 2 wooden dowels (A) into the base 8.

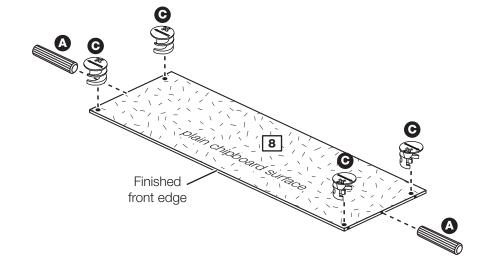

Step 3

Fit the base to the divider

Push the base 8 onto the divider 3 and secure with 2 screws 0.

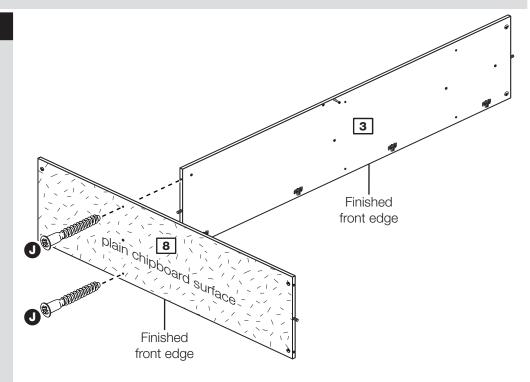

Step 4


Prepare the left side

Screw 4 metal dowels **B** into the left side **1**.

Fit 4 hinge plates **(C)** onto the left side **(1)**, making sure that the slot is facing towards the finished front edge.

Insert 2 large locking nuts **©** into the left side **1**.

Tap a wooden dowel **A** into the left side **1**.

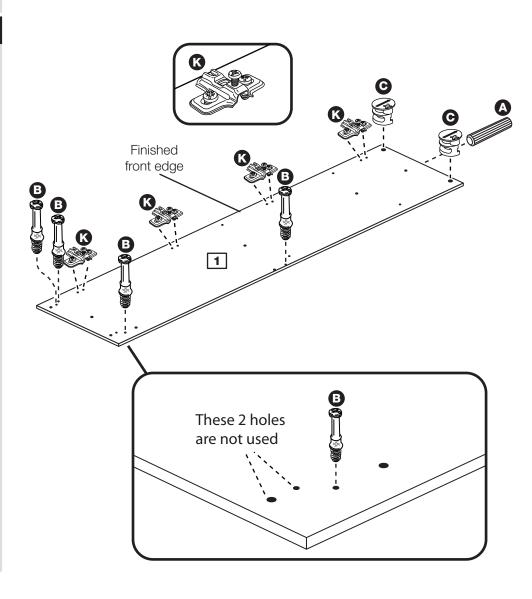

Step 5


Prepare the right side

Screw 3 metal dowels **B** into the right side **2**.

Insert 2 large locking nuts **©** into the right side **2**.

Fit 4 hinge plates (C) onto the right side (2), making sure that the slot is facing towards the finished front edge.

Tap a wooden dowel **A** into the right side **2**.

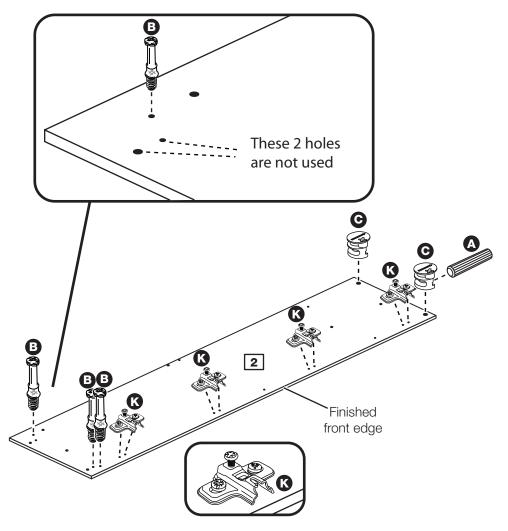


Step 6

Fit the right side to the base

Push the right side 2 onto the base 8.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the base **8**.

Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

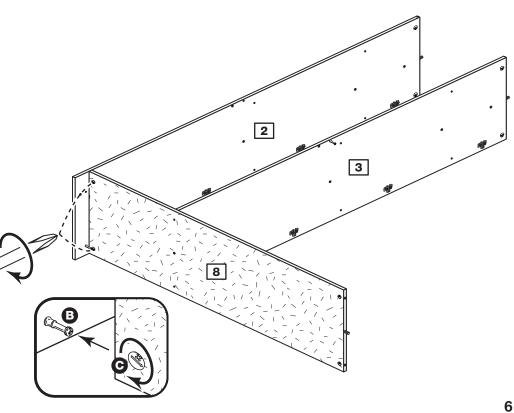


Step 7

Prepare the plinth

Insert 2 large locking nuts **©** into the plinth **9**.

Tap 2 wooden dowels (A) into the plinth [9].

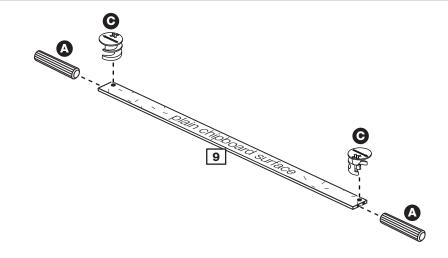


Step 8

Fit the plinth

Push the plinth 9 onto the right side 2.

Use a screwdriver to tighten the large locking nut **©** fitted to the plinth **9**.

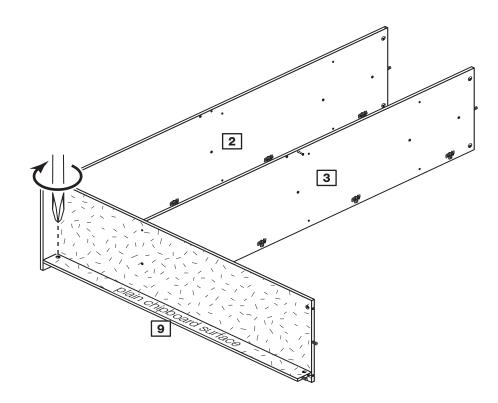


Step 9

Prepare the back rail

Insert 2 large locking nuts **©** into the back rail **5**.

Tap 2 wooden dowels **A** into the back rail **5**.

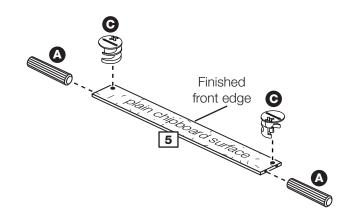


Step 10


Fit the back rail to the left side

Push the back rail 5 onto the left side 1.

Use a screwdriver to tighten the large locking nut **C** fitted to the back rail 5.

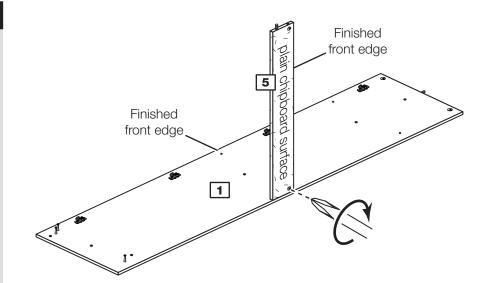


Step 11

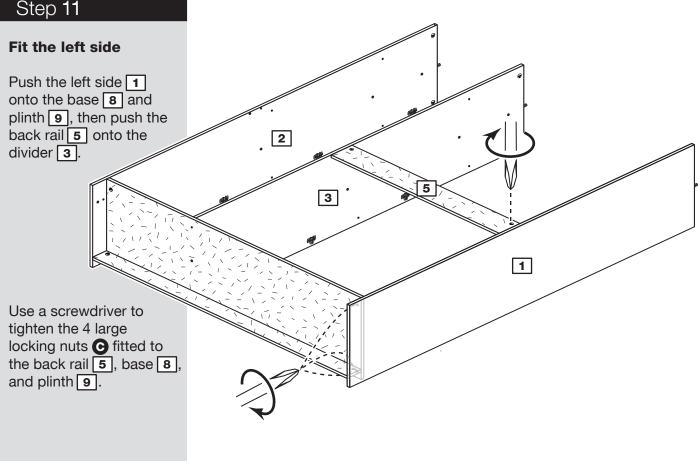

Step 12

Prepare the top

Screw 6 metal dowels **B** into the top **7**.

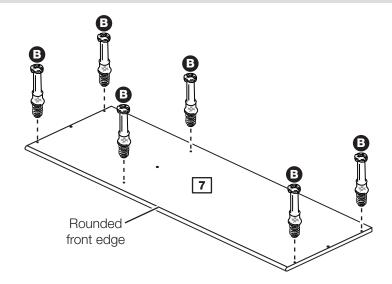

Step 13

Fit the top and plastic nails


Push the top **7** onto the assembly.

Use a screwdriver to tighten the 6 large locking nuts **©** fitted to the left side **1**, right side **2** and divider **3**.

Tap 2 plastic nails (1) into the bottom edge of each of the sides (1) and (2).

Tap 1 plastic nail **(+)** into the bottom edge of the plinth **(9)**.

9

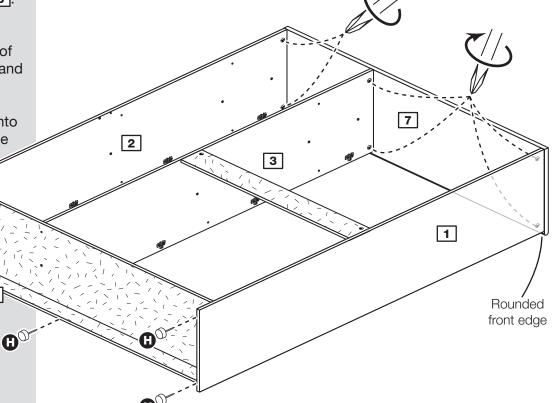

Step 14

Fit back panels

a: Square up the unit by making sure that measurement **x:x equals y:y.**

Place the small back 13 and large back 14, coloured surface facing down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the divider's back edge.

b: Nail **o** around the outside edges of the 2 backs.


Note: Do not nail where the 2 backs meet.

C: Push the nail screws
through the back
holders f and tap them
down between the small
back 13 and large back
14 and into the back
edge of the divider 3.


Keep tapping the nail screws (a) in until the back holders (b) dig into the small and large back.

Stand the unit up for the next step.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

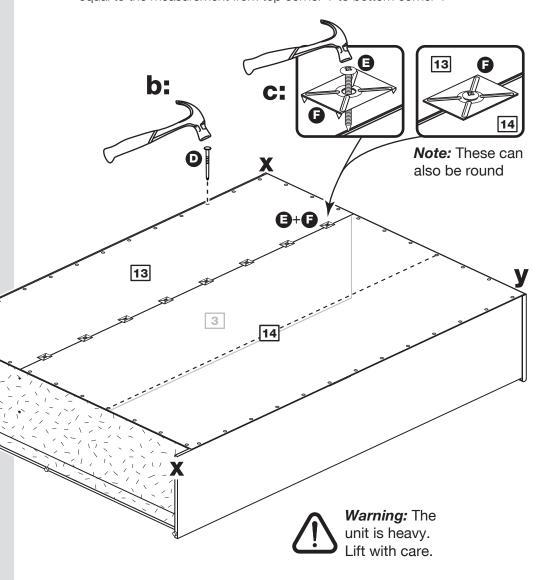

Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.



Step 15


Fit the hanging rails

You can fit the 2 long hanging rails 11 and 2 short hanging rails 12 using any of the 4 positions shown opposite.

Note: The rails at position 4 are used for shoe storage.

Insert 2 rail holders **M** for each of the 4 rails and then secure with them with screws **G**.

Push the hanging rails 11 and 12 down into the rail holders M.

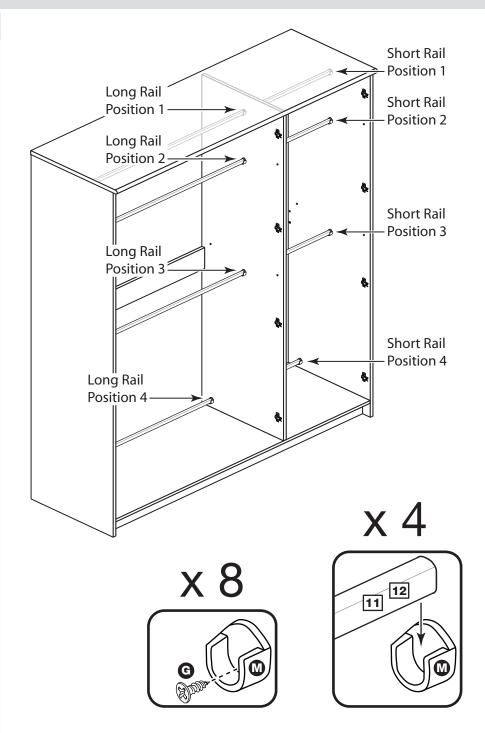


Step 16

Fit the shelves

Insert 4 shelf studs **N** at position 1 or 2 for the large shelf **4** and the small shelf **6**.

Lower the large shelf 4 and the small shelf 6 down onto the shelf studs (1).

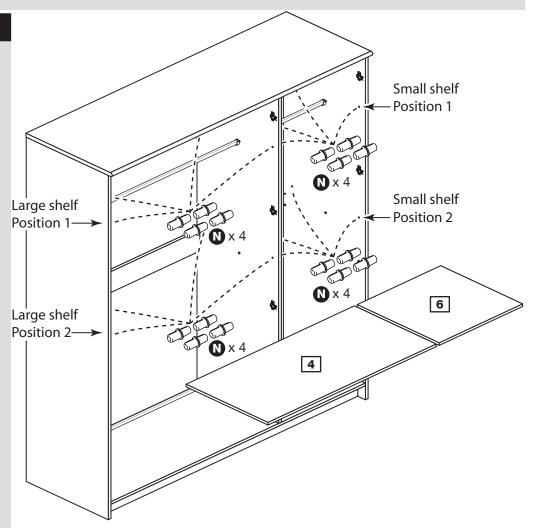


Step 17

Prepare the 3 doors

Push fit 4 hinges into each of the doors 10.

Secure each hinge with 2 screws **G**.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

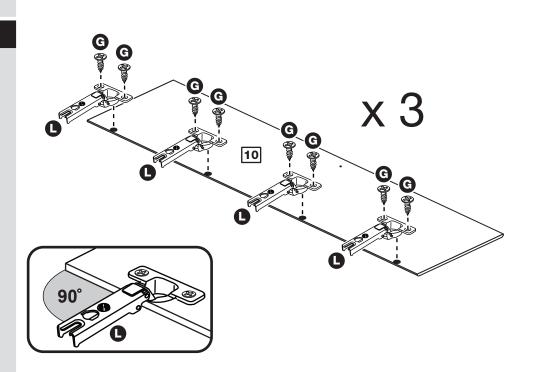

Step 18

Fit doors and handles

Note: The easiest way to attach each door 10 is to fit the top hinge first, then align and fit the other hinges.


onto the front part of the hinge plate **(C)**. The recess at the bottom of screw B goes into the slot in the hinge plate.

b: Keep the hinge **C**FLAT against the hinge plate **C** as you slide it across as far as it will go. Tighten screw A.

C: The hinge must be flat against the hinge plate prior to any adjustment.

d: The hinge must NOT be AT AN ANGLE to the hinge plate when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

e: Attach a handle **()** to each door **(10)** using 2 screws **()**.

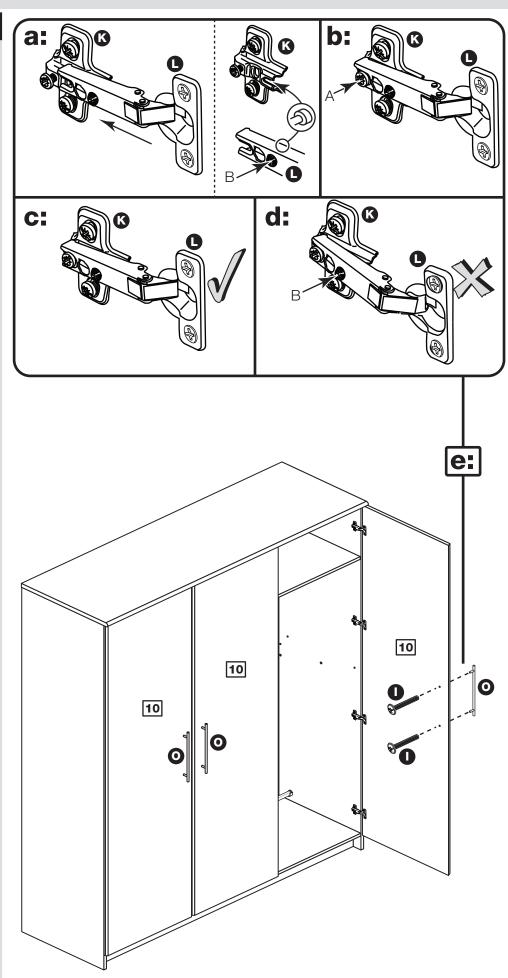

Step 19

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown.

Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

C: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C.
To move door 'in' tighten screw C.

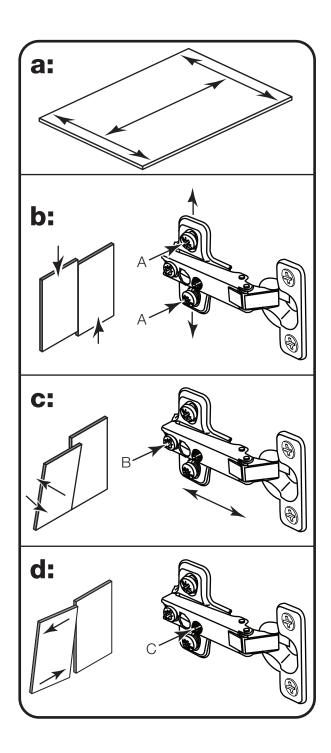

Step 20

Fit the overbalance protector kit


To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit

to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete

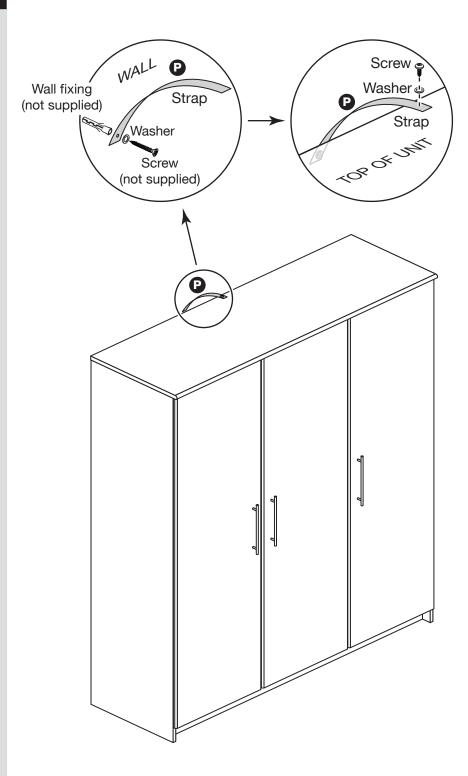

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

15 ALR3005