


2+
YEARS



- CONTENTS:**
1. Main frame
 2. Front wheel and fork assembly
 3. Mudguard
 4. Stabilisers x 2
 5. Saddle and pillar assembly
 6. Handlebars
 7. Front plaque (shaped and size may vary)
 8. Pedals x 2
 9. Clamp x2
 10. Clamp cover x1
 11. Pedal plugs x2 (Already Pre-assembled to the front fork)
 12. Rear wheel assembly

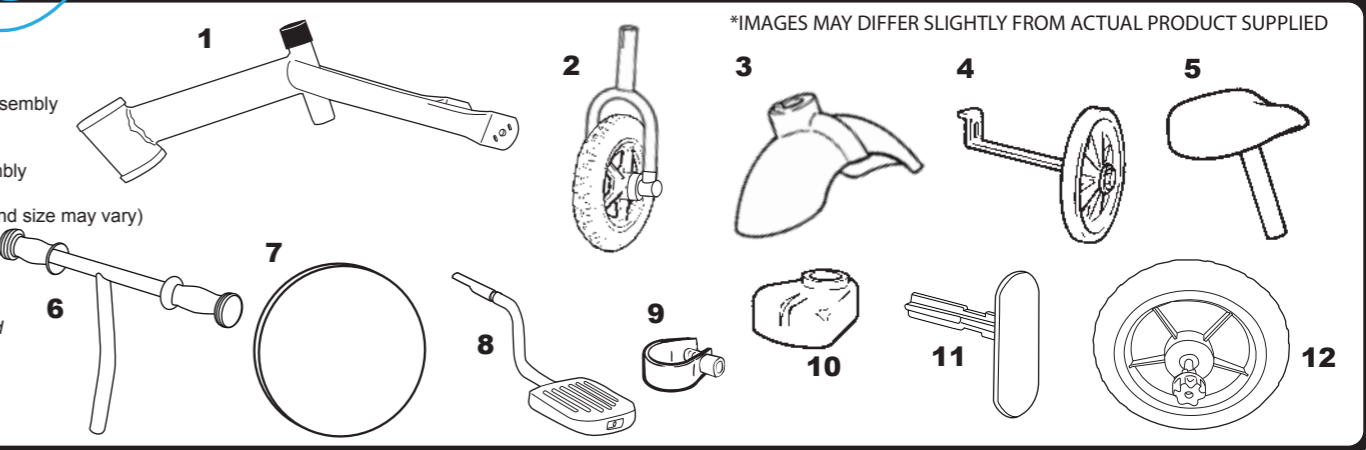

*IMAGES MAY DIFFER SLIGHTLY FROM ACTUAL PRODUCT SUPPLIED

2-in-1 10" Bike

This bicycle is to be assembled by an adult.

Check the contents and only remove the protective packaging from each item as and when it is to be fitted.


Please remove all packaging before giving to a child.

Please keep the packaging until you have completely assembled the bicycle.


ATTACHING THE REAR WHEEL

1. Remove the bolt, bracket, washer from the rear axle on one side. On the opposite side remove the bolt, bracket, washer, nut, axle sleeve and wheel.
2. Remove the other axle sleeve and thread the axle through the rear fork, and thread the axle sleeve on to the axle.
3. Thread the rear wheel and the other axle sleeve on to the axle. Thread the remaining of the axle through the rear fork and tighten with the nut
4. Tighten the wheel on the axle using the nut spanners and twist them in the opposite direction to tighten.
5. Thread the washer and bracket on to the axle on both sides and tighten with the bolt. This is now in balance bike mode. See Bike mode to add the stabilisers.

REAR WHEEL ASSEMBLY

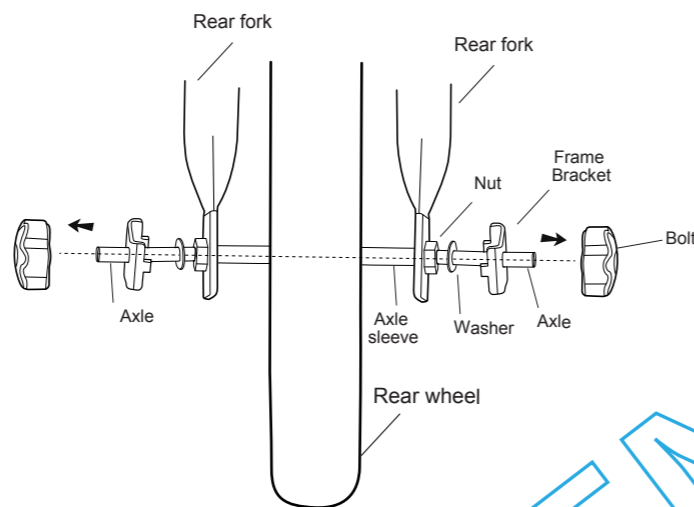


TIGHTEN THE WHEEL

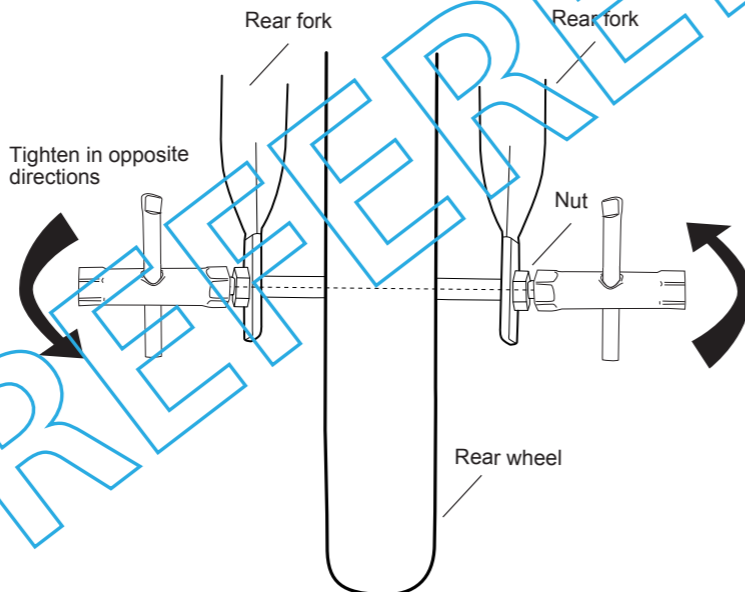


FRONT FORK ASSEMBLY

1. Slide the mudguard on to the front fork.
2. Slide the frame on to the fork stem, ensure the location tab on the fork stem fits in to the groove located on the frame head tube.
3. Push the clamp onto the fork stem and push it all the way down.

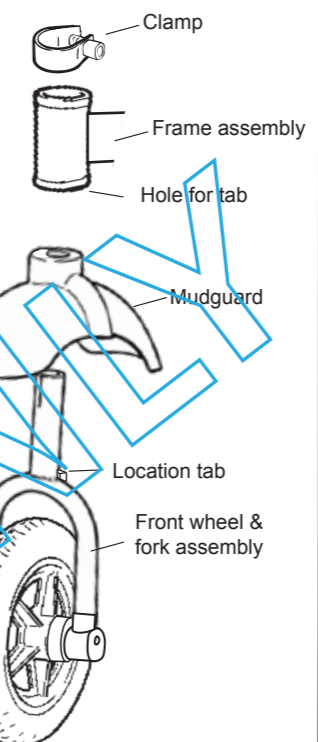


FITTING THE HANDLEBARS

1. Slide the clamp cover onto the handlebar stem.
2. Push the handlebar stem into the fork stem until the minimum insertion marks are concealed.
3. Align the handlebar with the front wheel and tighten the clamp.
4. Slide the clamp cover down over the clamp.

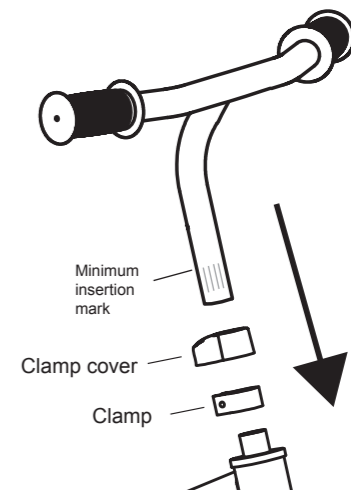


FITTING THE SADDLE

1. Push clamp onto the down tube.
2. Push the saddle stem into the down tube to at least the minimum insertion mark.
3. Align the saddle with the bike frame and tighten the clamp.

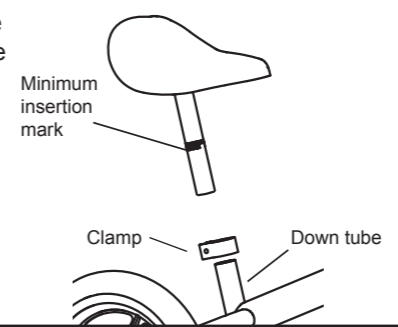

ATTACHING THE PLAQUE

There are 2 possible ways to attach the plaque, depending on the size and shape. See below diagrams.

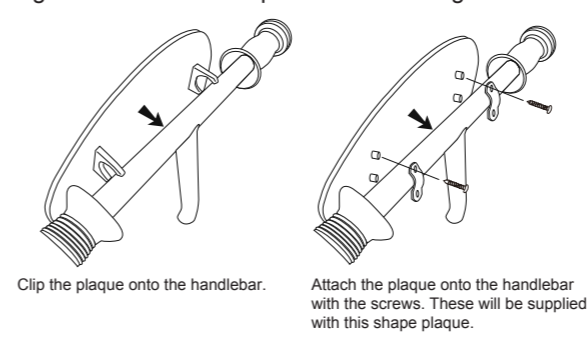


Important owner's information

Please read this before allowing your child to ride the bicycle.

CORRECT BICYCLE SIZE

Make sure the bicycle you have bought is the correct size for the child. The minimum crotch measurement of the rider, with feet flat on the ground, should be 1" (25mm) more than the height of the bike.

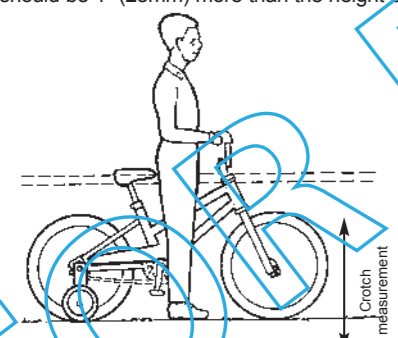

BICYCLE SET UP

It is essential that, before moving off, the rider is comfortably seated on the bicycle and not stretching forward to reach the handlebars.

Re-check the instructions given for the installation of the saddle.

FOR YOUR CHILD'S SAFETY

Recheck that all screws, nuts and bolts are firmly tightened. Make sure that your child is capable of riding this bicycle. Do not allow your child to ride without supervision.

RECOMMENDED TORQUE TOLERANCES

Handlebar clamp	15 Nm
Seat Post	15 Nm
Wheels	20 Nm

WARNING: Stabilizers are not to be used by children over 36 months due to insufficient strength (for pedal bike)

Pedal bike mode for children 2-3 years.

Balance bike mode for children 3 years and up.

This toy should be used with caution since skill is required to avoid falls or collisions causing injury to the user or third parties.

Please retain this leaflet for reference to the manufacturer. Design and spec may vary.

Made in China to European Safety Standards.

The CE mark denotes compliance with the standards laid down by the EC (European Community).

CUSTOMER SERVICES

MV has taken great care to ensure that this item has reached you in good condition. Should you have a query, please contact: customer.services@mvsports.com where your query will be dealt with promptly. Alternatively, you can call on 0121 748 8017

DISTRIBUTED BY

MV SPORTS & LEISURE LTD
35 Tameside Drive • Castle Bromwich • Birmingham • B36 7AG • UK
www.mvsports.com

A GUIDE TO SAFE CYCLING

1. We recommend this bike is for pavement use only.
2. Do not ride at night. Visibility is often limited at dawn and dusk.
3. Always give pedestrians right-of-way, and don't ride too close to them. Never park your bicycle where it can cause a nuisance.
4. Avoid hazards that may cause you to lose control of your bicycle such as pot holes, uneven pavements and manhole covers.
5. Leave plenty of room when passing parked vehicles and watch out for doors being opened in your path.
6. Remember that braking distance should be increased in wet weather, and regular checks of brakes, steering and lighting should be made.
7. Never carry passengers on your bicycle. Never carry packages in your hands while riding, or fix anything to your bicycle that could obstruct your visibility or control.
8. Don't wear anything that restricts your hearing.
9. Always ride with both hands on the handlebars.
10. Don't wear very loose clothing, which could hang down and become caught in the wheels of your bicycle. Wear cuff bands or trouser clips to keep your trousers from getting caught in the chainwheel.
11. We recommend that light-coloured or fluorescent clothing be worn which helps others to see you in daylight and poor light.
12. Always wear proper safety equipment. We recommend a helmet, long-sleeve shirt, long trousers, shoes and elbow and knee pads. Gloves and eye protection also make good sense. Cover your handlebars, stem and top tube with safety pads for extra protection.
13. Don't ride your bicycle if the chain cover is not attached.

PLEASE REFER TO THE HIGHWAY CODE REGARDING RULES FOR CYCLISTS.

PEDAL BIKE MODE ASSEMBLY

PEDALS



1. Remove the pedal plug by pushing in the button at the bottom of the fork, to release the plug.
2. Look through the hole in the fork to establish where the flat edge is (see diagram A). Pushing in the button at the bottom of the fork, insert the pedal arm in to the hole in the fork. Ensure the flat side of the pedal arm is flat edge to flat edge in the hole.
3. Push the pedal in to the hole until the groove in the pedal is no longer visible, realise the fork button and the pedal will be securely locked.
4. If the flat edge is inserted upwards on the first pedal then it will be inserted downwards on the second pedal or visa-a-versa.

NOTE: Check and ensure the pedals are fully engaged and securely locked before giving to a child.

STABILISERS

1. Remove the bolt from the rear wheel axle.
2. Ensure the bracket is fitted into the grooves on the frame on the bike
3. Slide the stabiliser on to the axle, all the way so it covers the bracket.
4. Replace and tighten the bolt.

NOTE: It is very important to check the stabiliser connection to the bicycle. Failure to properly tighten may cause the stabiliser to dislodge. Pay attention for risk when using stabiliser. When the stabilisers are removed please be sure to replace the bolt to cover the end of the axle. When the pedals are removed please replace the pedal plug to over the hole.

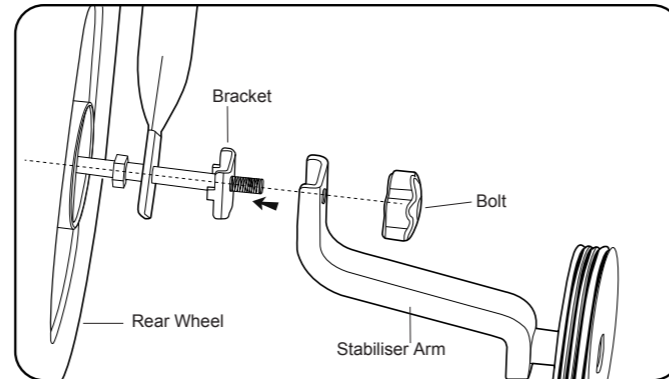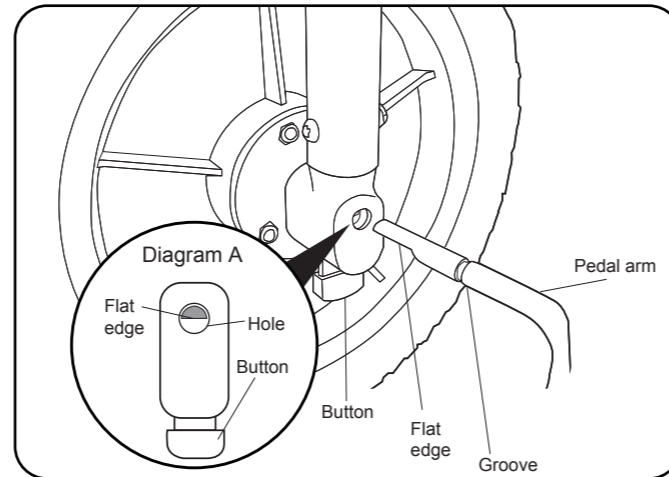

Refer to that illustrated.

BALANCE BIKE MODE ASSEMBLY

REMOVE PEDALS

1. Push the button in at the bottom of the fork and pull the pedal out.
2. Push the button in at the bottom of the fork and insert the pedal plug.
Note: Pedal plugs are used to ensure no debris gets in to the wheel assembly when in balance bike mode.

REMOVE STABILISERS

1. Un-screw the bolt from the stabiliser arm to release.
2. Remove stabiliser arm away from the frame bracket.
3. Ensure the frame bracket is still on the axle and re-place the bolt and tighten.

