









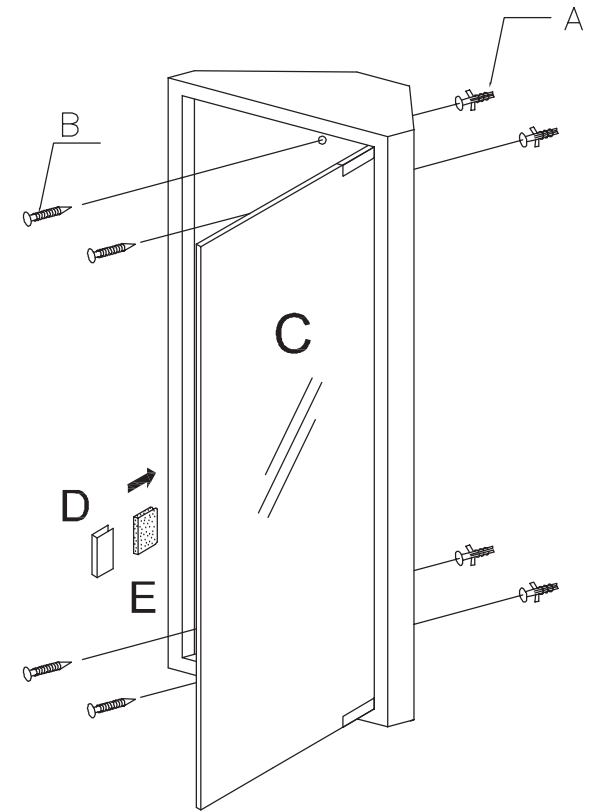
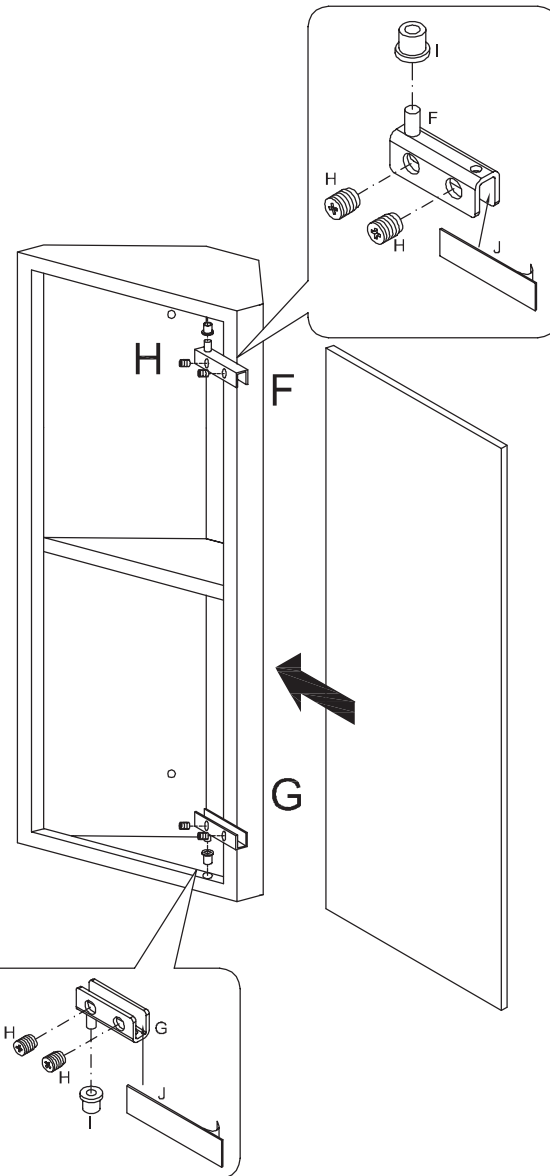
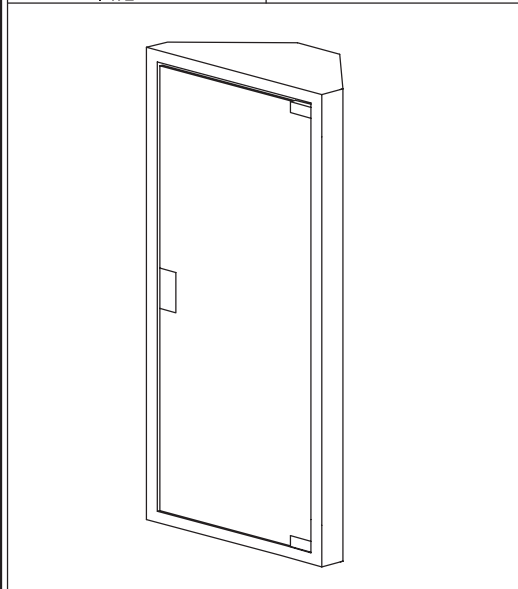


ASSEMBLY INSTRUCTIONS

Contents:

 A x4	 B x4
 C x1	 D x1
 E x1	 F x1
 G x2	 H x4
 I x2	 J x2




Please take the shelf-adhesive stickers J out and tear off, then stick on the inside of F & G

Fitting Instructions for Stainless Steel Corner Cabinet

Important : KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE

Parts

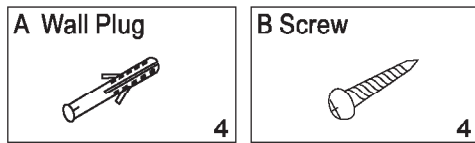


Notes : The wall fixing pack is taped to the shelf.

Safety Information

1. Installation of this product must be carried out by a competent person. You will need the assistance of a second competent person to install this cabinet.
2. Maximum loading of the cabinet is 10kg.
3. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill wandering, particularly on tiled surfaces.
4. When drilling into walls always check that there are no hidden wires, pipes etc. Make sure that the screws and wall plugs supplied are suitable to support the unit. Specialist fixings may be required. If in doubt consult a qualified tradesperson.

Installation

1. Place the cabinet in the chosen location, against the wall. Use a spirit level to ensure that the cabinet is level.
2. Ask the competent helper to hold the cabinet in position.
3. Push the cabinet door to the right side and use a pencil to mark the wall through each of the circular holes in the back of the cabinet.
4. Remove the cabinet from the wall.
5. Using the pencil marks, drill 4 holes. Using a suitable 6.3mm drill bit to a depth of 28mm.
6. Place a wall plug (A) in each hole and tap in with a hammer until flush with the wall.
7. Ask the helper to hold the cabinet in position.
8. Using the screws (B) provided, fix the cabinet to the wall. Tighten all screws to secure the cabinet: See Fig. 1.

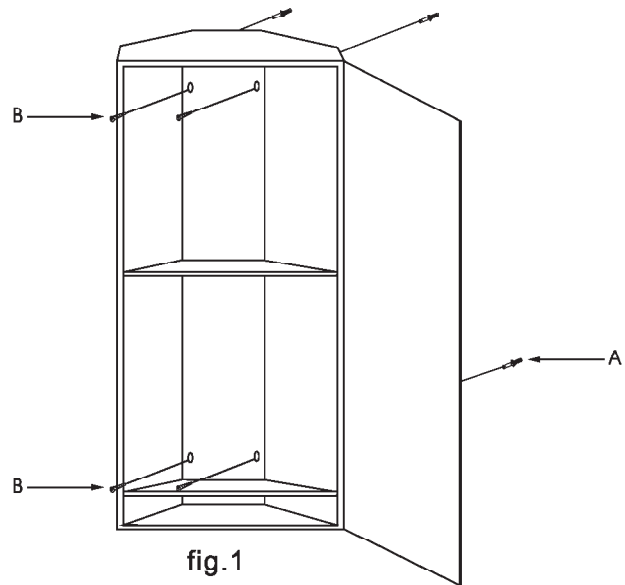

Warnings

1. Do not place very hot or very cold items against or in close proximity to glass surfaces unless adequately thick insulating material is used to prevent such items from coming into contact with the glass.
2. Do not strike the glass with hard or pointed items.
3. It is essential that this unit is fixed to a wall using the correct type of fixings. This product could be dangerous if installed incorrectly.
4. Do not sit or stand upon horizontal glass surfaces.

Care Instructions

when cleaning stainless steel panels or mirrors, use a damp cloth or leather and mild washing up liquid or soft soap if necessary.
Do not use washing powders or any other substance containing abrasives since these substances will scratch the surface or glass.

This unit complies with BS 7449:(1991).

Produced for

Argos Ltd.
489-499 Avebury Boulevard
Saxon Gate West
Central Milton Keynes
Bucks, Mk9 2NW

Cat. No : 833-0318(D)
Manufacture Date :

This unit contains film backed mirrored doors of a nominal thickness of 5mm, which is not required to be classified to BS6206 Class C.

If a glass is chipped or broken, replace with glass of the type described on this label. Consult the manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the model number, and batch number or date of manufacture.

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.


Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:**  Always use a larger screw and wall plug if you are not sure.
- 2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

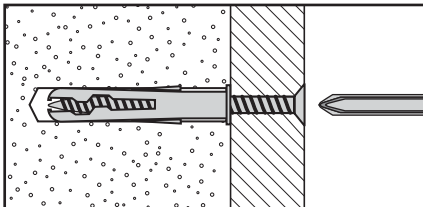


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

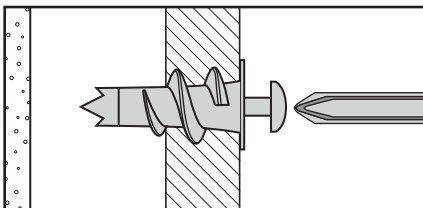


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

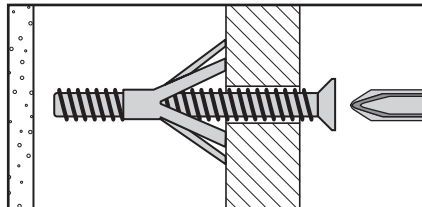


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

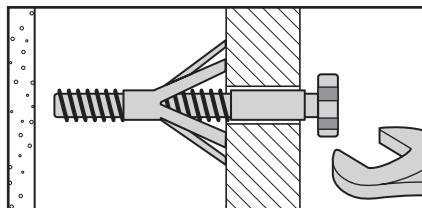


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

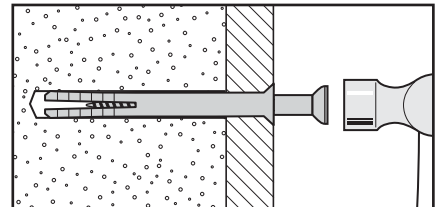

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

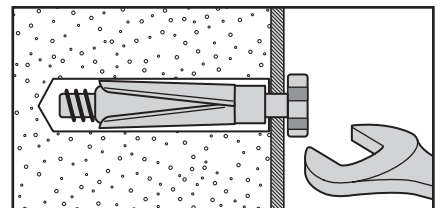

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.