


Assembly & Operation Instructions

HOME

WHITE WALL AIRER 3.5M DRYING SPACE (LYJ229B - 4330154)

Parts Included:




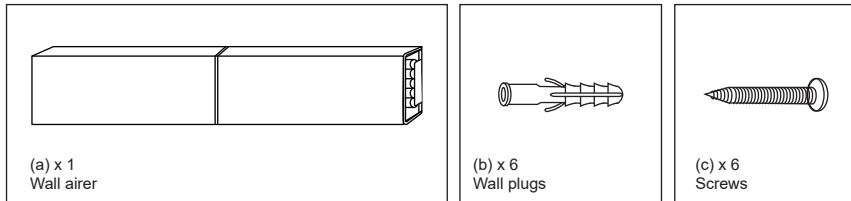


TOOLS REQUIRED (NOT SUPPLIED)

Description	Diagram
Pencil	
Drill with a 8mm drill bit	
Level ruler	
Screwdriver	


Installation

1. Open the wall airer (a) and hold against the wall. Ensuring it's level and in the correct location, mark the wall in 6 places through the screw holes in the wall plate.
2. Remove the airer (a) off the wall, drill the marked holes and insert the wall plugs (b).
3. Hold the open wall airer (a) against the wall and secure by aligning and fixing screws (c) through the wall plate and into the wall plugs (b). Recommendation: Fix the top right and left first to make installation easier and do not fully tighten all screws (c) until they are all aligned and in place. Tighten all screws (c) fully, once you're happy it is correctly mounted.

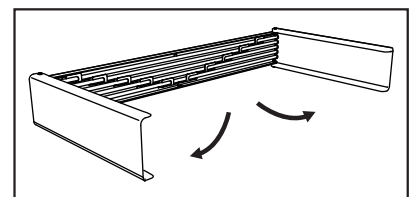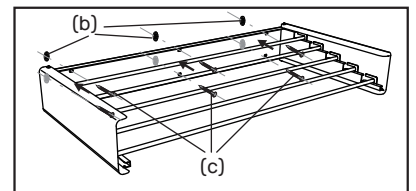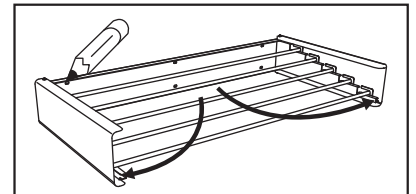


Directions For Use

1. Open the doors.
 2. Open the inner side support sections in the direction of the arrows shown. As these sections open it will then allow the rails to come forward and slot into position. All rails need to be located before use.
- Your airer is now ready to use.

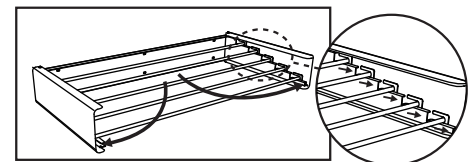


Storage

1. To close, using two hands, gently push the rails back towards the wall bar and close the inner metal support sections.
2. Close the doors.
3. Wipe clean with a damp cloth.

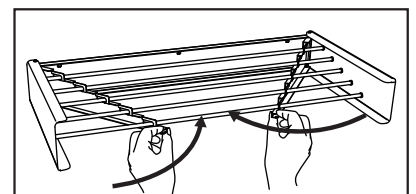

Warning

Maximum loading capacity is 4kg (evenly spaced).
This is not a children's toy. Do not allow children to play with this product.

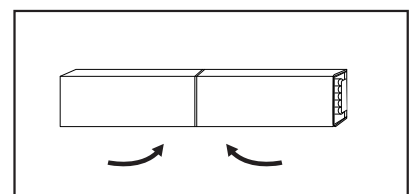

Customer Support

0345 640 2020

A GUIDE TO - WALL MOUNTING & FIXINGS

Important note:

If plastic wall plugs are supplied with your product:



these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

1. General rule: Always use a larger screw and wall plug if you are not sure.
2. Ensure you use the recommended drill bit to match the wall plug and hole size.
3. Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
4. Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
5. Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General purpose" wall plug

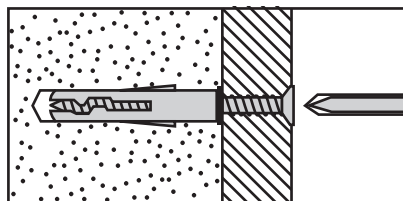


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

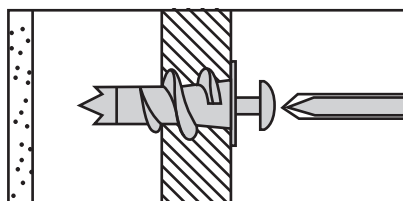


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity fixing" wall plug

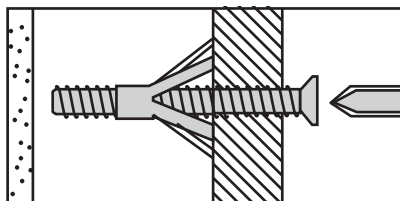


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity fixing-heavy duty" wall plug

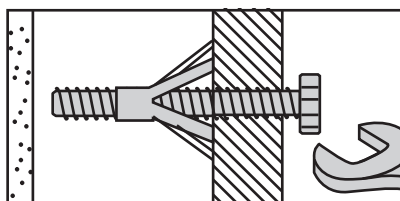


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer fixing" wall plug

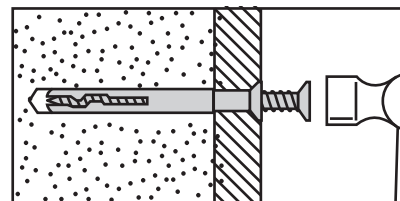

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield anchor" wall plug heavy loads

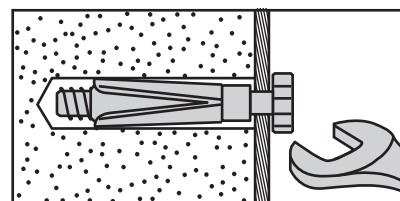

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.