

**Series 4, built-under cooker hood, 60 cm, Stainless steel
DUL63CC50B**



Optional accessories

DHZ2701 : Standard odor filter

The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- **LED Illumination:** The energy-saving lighting provides white and good lighting for the hob area.
- **Extraction rate:** ensures optimal kitchen air quality.
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **LED-Illumination:** The energy-saving lighting provides a clear and bright illumination for the hob area.
- Comfort of use.

Technical Data

Typology : Built-in/Built-under
 Length electrical supply cord : 145.0 cm
 Net weight : 6.2 kg
 Type of control : mechanical
 Number of speed settings : 3
 Maximum output air extraction : 350 m³/h
 Maximum output recirculating air : 110 m³/h
 Number of lights : 2
 Noise level : 72 dB(A) re 1pW
 Diameter of air outlet : 120 / 100 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : DHZ2701
 Total power of the lamps : 8 W
 Grease filter type : Kasette
 Connection Rating : 146 W
 Voltage : 220-240 V
 Frequency : 50 Hz
 Plug type : GB plug
 Installation typology : Built-under
 Body material : Stainless steel
 Plug type : GB plug
 Dimensions of the product, with chimney (if exists) (in) : x x
 Dimensions of the packed product : 11.02 x 29.52 x 25.98
 Net weight : 14.000 lbs
 Gross weight : 22.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 145.0 cm
 Dimensions of the product, with chimney (if exists) : 150 x 600.0 x 482.0 mm
 Dimensions of the packed product (HxWxD) : 280 x 750 x 660 mm
 Net weight : 6.2 kg
 Gross weight : 10.1 kg



Series 4, built-under cooker hood, 60 cm, Stainless steel DUL63CC50B

**The built-under cooker hood: save space
by mounting the hood beneath your upper
cabinet or on the wall.**

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 93.3 kWh/year
- Blower Efficiency Class: E
- Lighting Efficiency Class: E
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 56/72 dB

Variant:

Design:

Technical information

Performance

Power:

Environment and safety:

Comfort:

Measures:


Technical information

Optional accessories

- Built-under Hood stainless steel
- Suitable for ducted or re-circulated extraction
- For installation underneath a wall cupboard or on the wall
- push buttons
- 3 speeds
- Single motor
- Metal grease filter, dishwasher safe
- Adjustable glass visor
- 2 x 4 W LED 4W E14
- Light Intensity: 45 lux
- Colour Temperature: 3000 K
- Maximum extraction rate exhaust air 350 m³/h according to EN 61591
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Power rating: 146 W
- 100 or 120 mm diameter pipe

** In accordance with the EU-Regulation No 65/2014*

**Series 4, built-under cooker hood, 60 cm,
Stainless steel
DUL63CC50B**

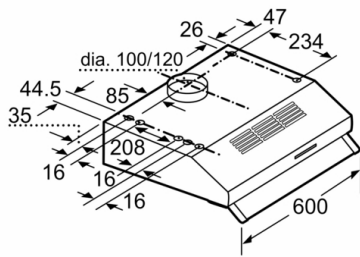

measurements in mm