


2 SEATER SWING HAMMOCK

Assembly Instructions - Please keep for future reference

450/4272

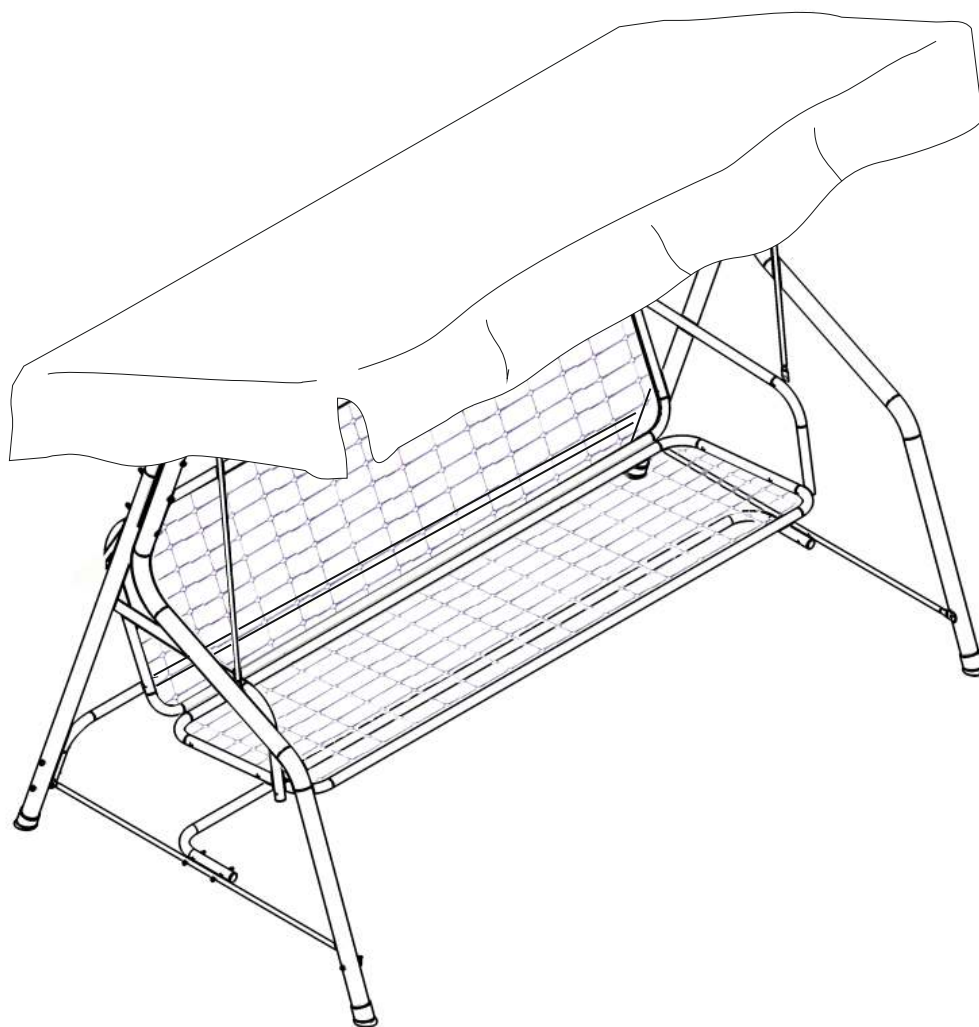

Dimensions

Width - 151 cm
Depth - 113 cm
Height - 154 cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**
Argos = 0345 6400800



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.

- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts


- Regularly check and ensure that all bolts and fittings are tightened properly.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

Customer Helpline: Argos = 0345 6400800


Please check you have all the components listed below




1 Back leg x 2 (137.5x4.5 cm)

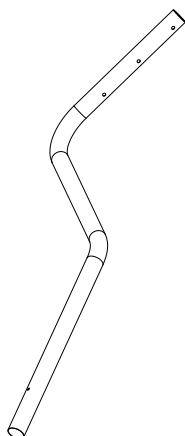


2 Front leg x 2 (150x34 cm)

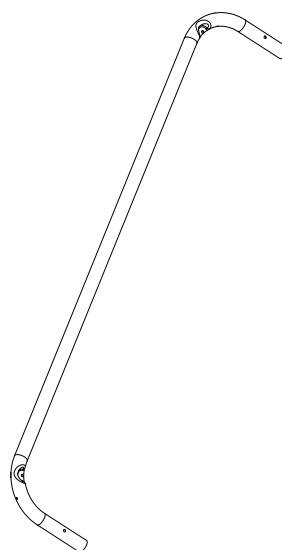


3 Top x 1 (178 x 35 cm)




4 Roof bar x 2 (118 x 17 cm)




5 Roof pole x 2 (169 x 1.5 cm)

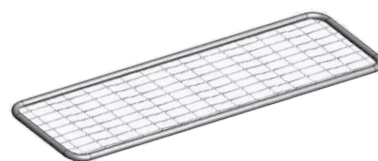


6 Seat support x 2 (150 x 48 cm)




7 Armrest x 2 (66 x 21 cm)




8 Seat support bar x 6
(79 x 1.6cm)



9 Side bar x 2 (104 x 2.5 cm)

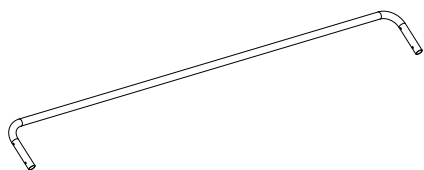

10 Cross bar x 2 (178 x 21 cm)




11 Canopy x 1 (178 x 60.5 cm)




Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.




M8 x 10cm Screw x 6




M6 x 8cm Screw x 4




M6 x 6cm Screw x 8



M6 x 5,5cm Screw x 4



M6 x 4cm Screw x 4

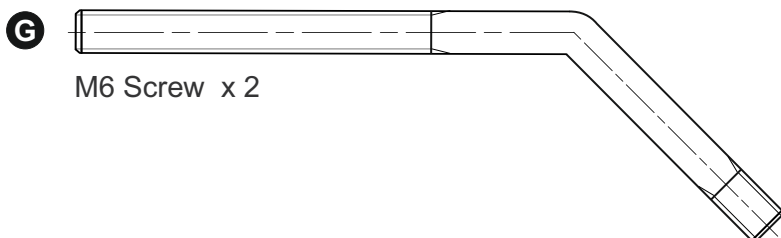


M6 Screw x 2

Tools required



(Supplied)

Ruler - Use this ruler to help correctly identify the screws









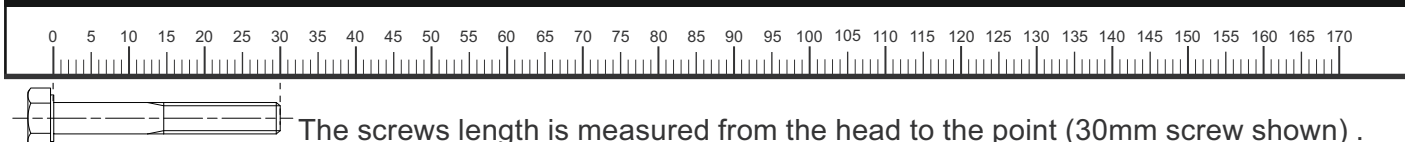








The screws length is measured from the head to the point (30mm screw shown) .

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


H  M8 Nut x 6	I  M6 Nut x 22	J  M6 Nut x 2
K  Ø8 x 12	L  Ø6 x 36	M  Ø6 x 2
N  Spring x 2	O  28 x 2.5 cm x 2	P  Ø45 x 2
Q  Ø45 x 4	R  x 2	S  x 4
T  x 8	U  x 2	V  Ø28 x 8

Assembly Instructions

Step 1

Insert the plastic foot **Q** onto the end of the back legs **1**

2x

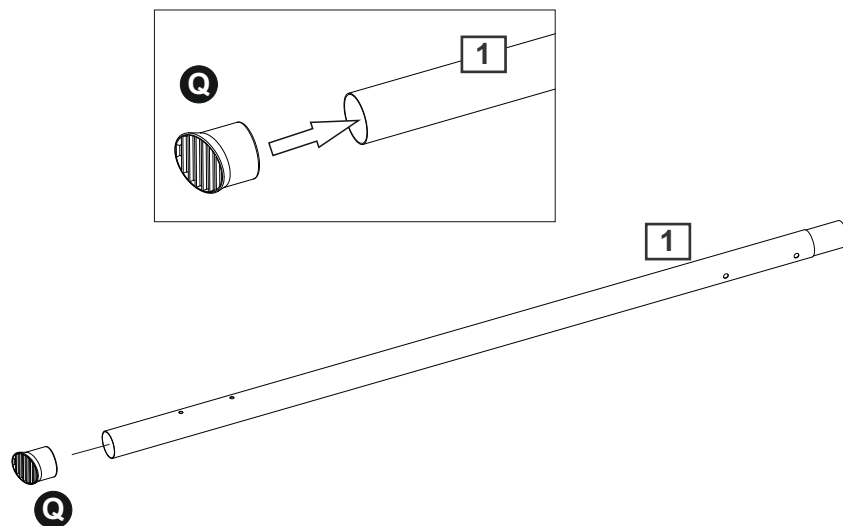


Step 2


a: Insert the plastic cap **P** into the end of front legs **2**

Note:
Pay attention to the position of the holes


2x

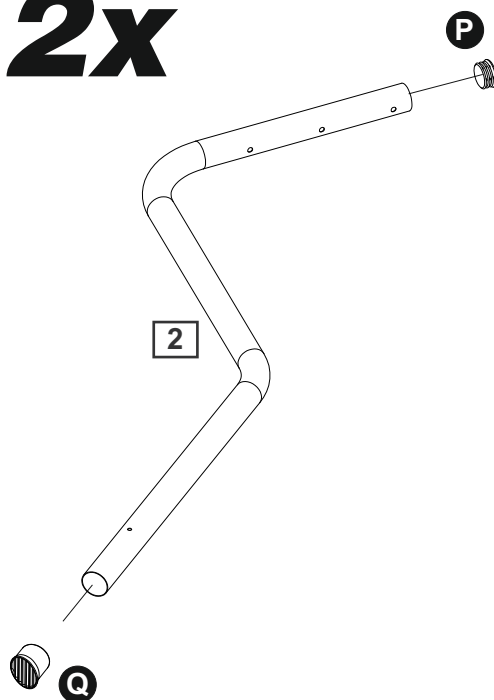

a:

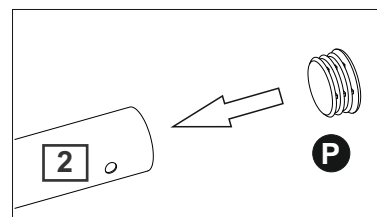

b:

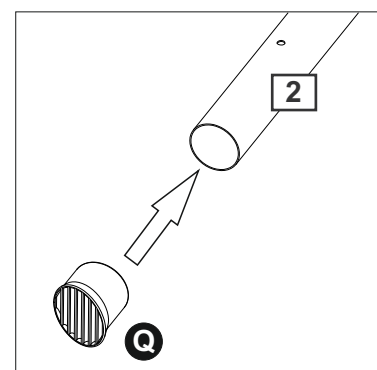

b: Insert the plastic foot **Q** onto the other end of the front legs **2**



Assembly Instructions

Step 3

Assemble back leg **1** and front leg **2** together with plastic spacer **O** using screws **A**, washers **K** and nuts **H**.



Note:
Do not fully tighten bolts.
Repeat with the remaining legs.

2x

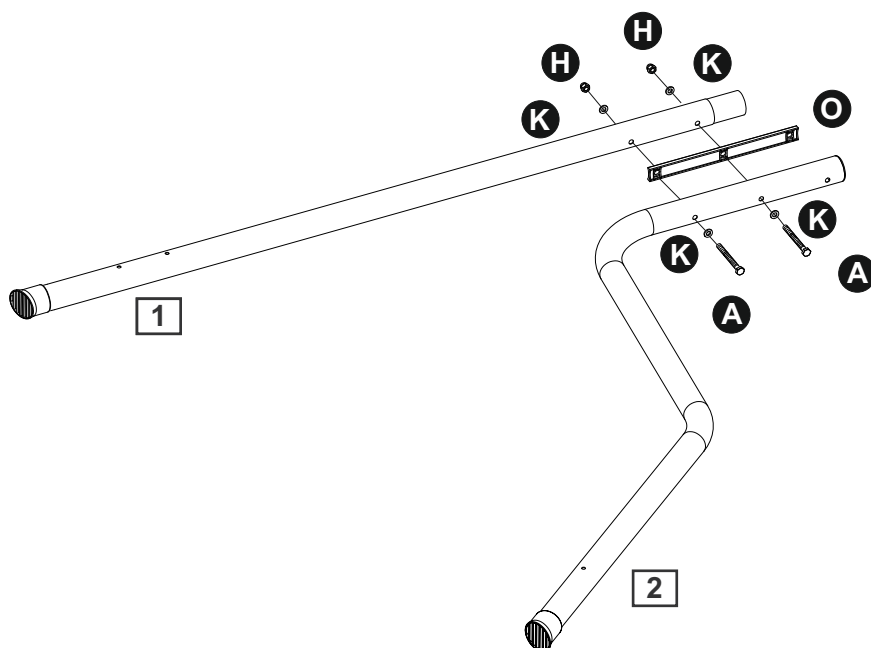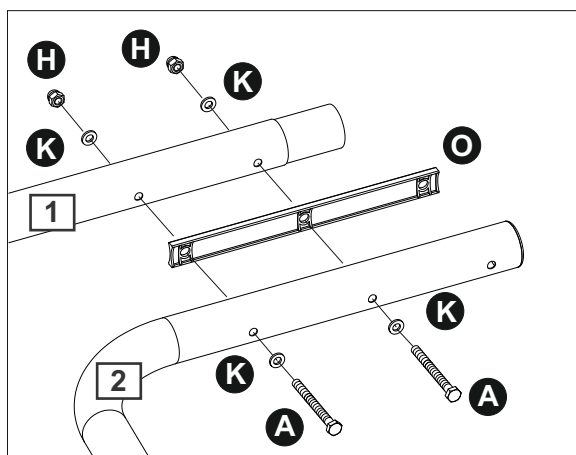

Step 4

Assemble the top **3** with the legs using screws **A**, washers **K** and nuts **H**.

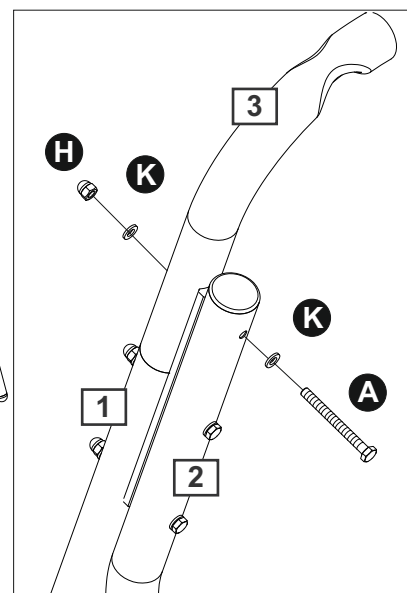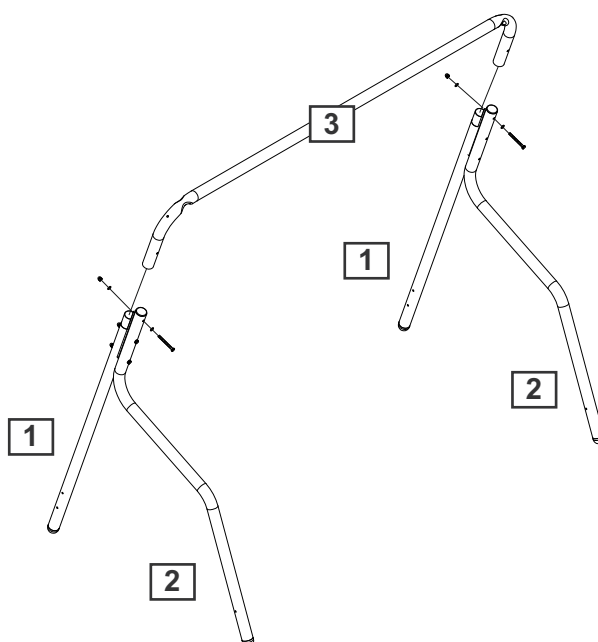


Assembly Instructions

Step 5

fix the plastic caps **S**
onto the side bar **9**




2x

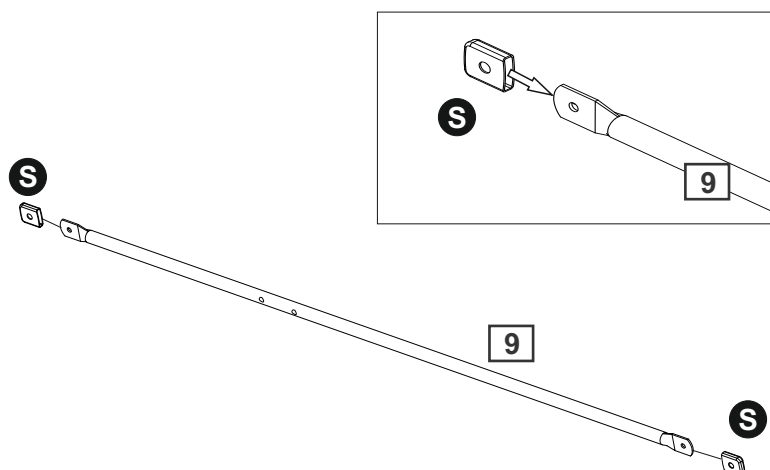

Step 6


Assemble the side bar **9**
with the legs using
screws **D**, washers **L**
and nuts **I**

Note:
Pay attention to the
position of the holes

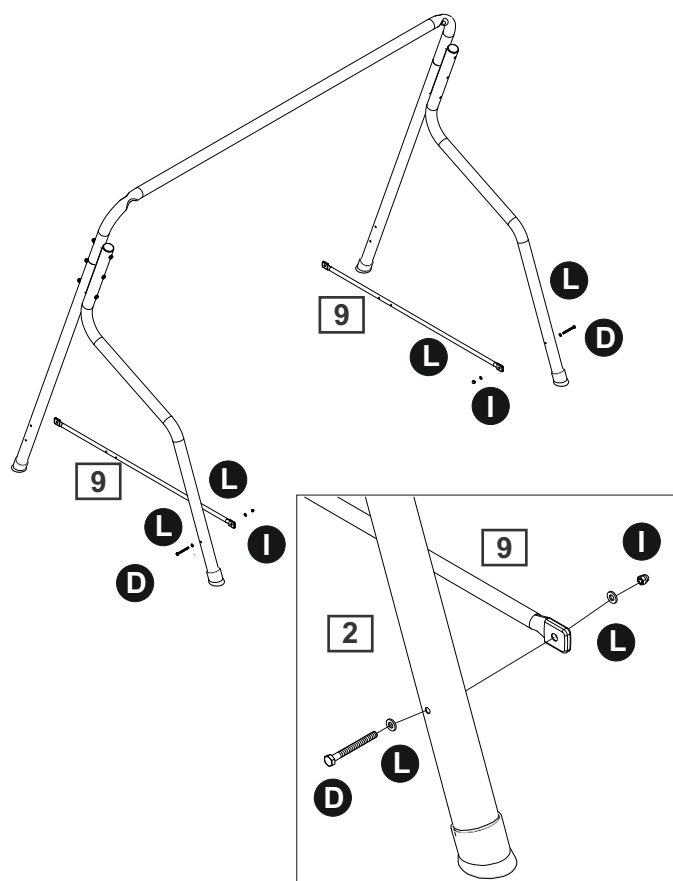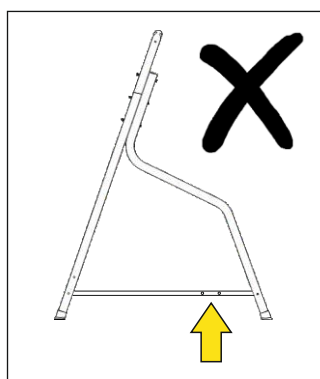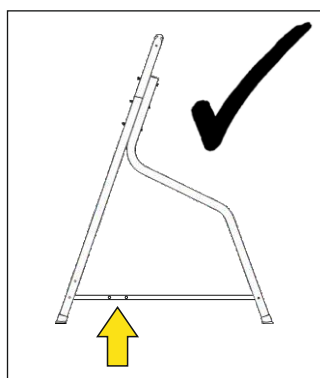

Step 7

Insert the plastic caps **V**
into the end of one
cross bar **10**


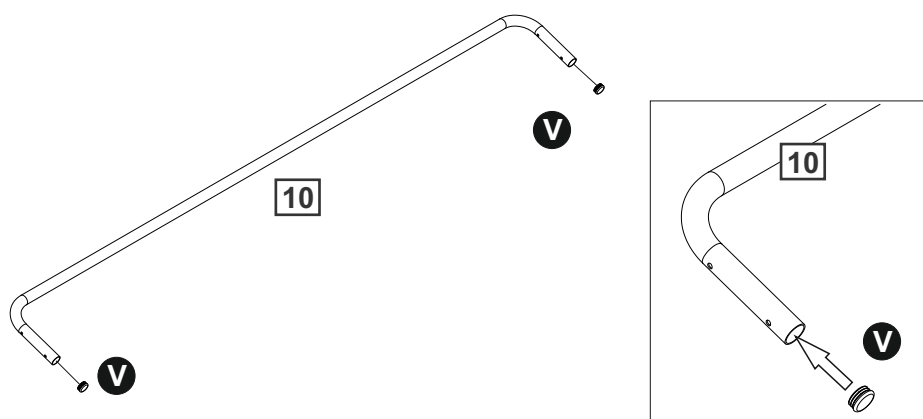


Assembly Instructions

Step 8


Assemble the cross bar **10** with the back legs **9** using screws **B**, washers **L** and nuts **I**

Note:
Do not fully tighten bolts.

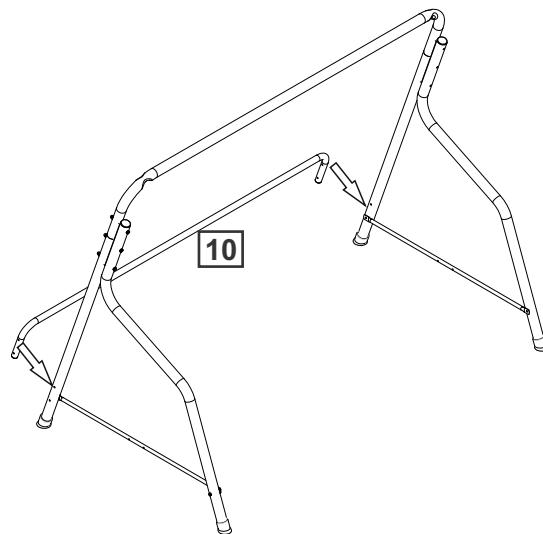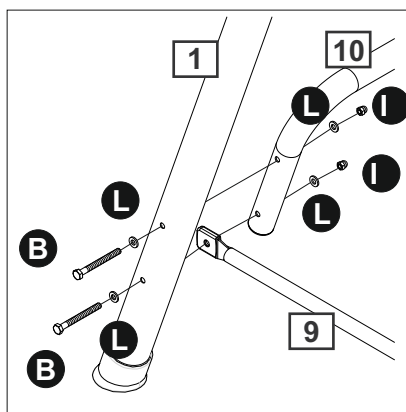

Step 9



Insert the plastic caps **V** into the end of the other cross bar **10**

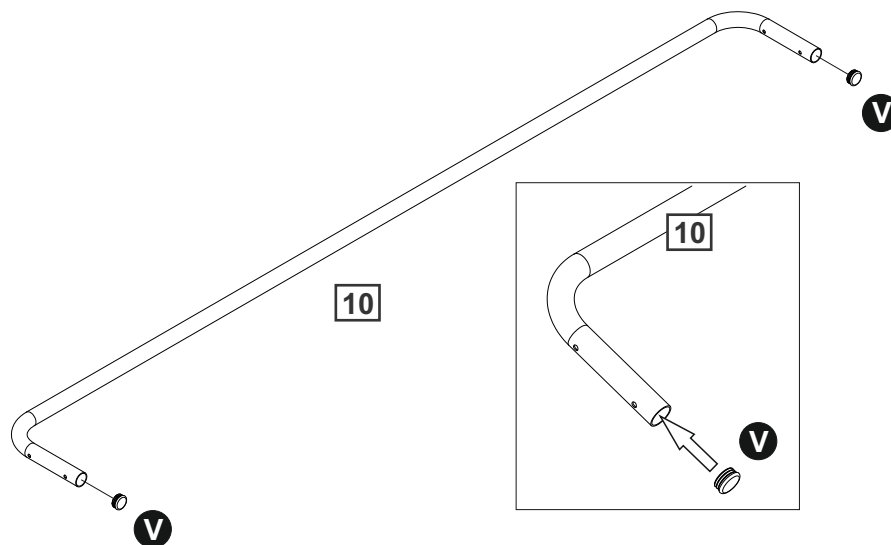

Step 10

Assemble the cross bar **10** with the side bars **9** using screws **D**, washers **L** and nuts **I**

Note:
Do not fully tighten bolts.


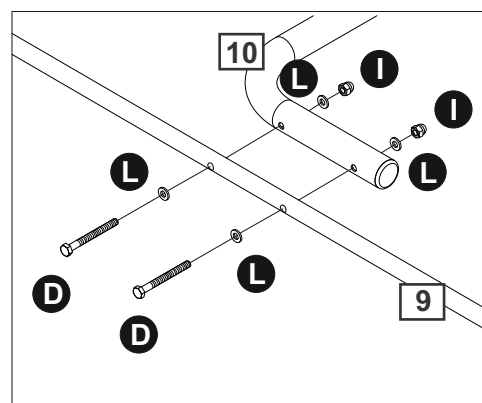
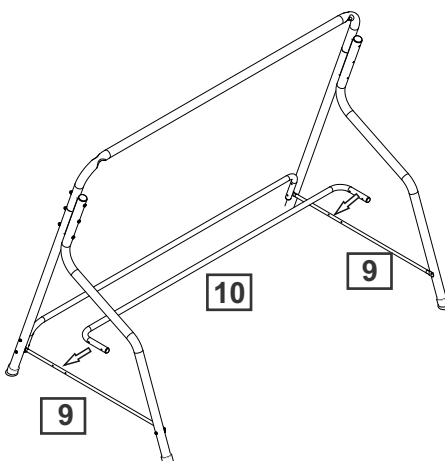


Assembly Instructions

Step 11



Insert the plastic caps **V** into the end of the armrests **7**

2x

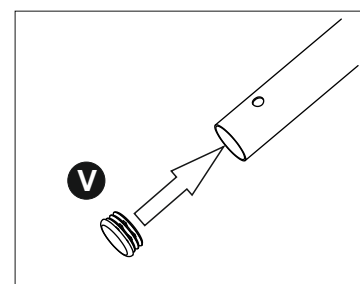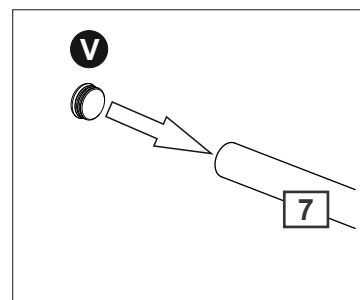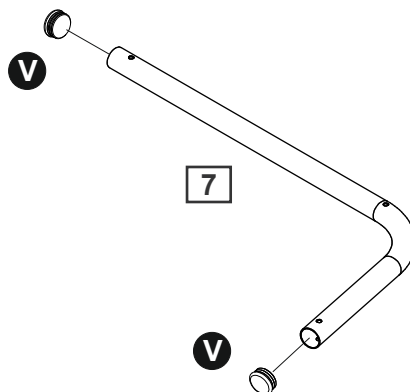




Step 12

Assemble the two seat support **6** together using screws **D**, washers **L** and nuts **I**

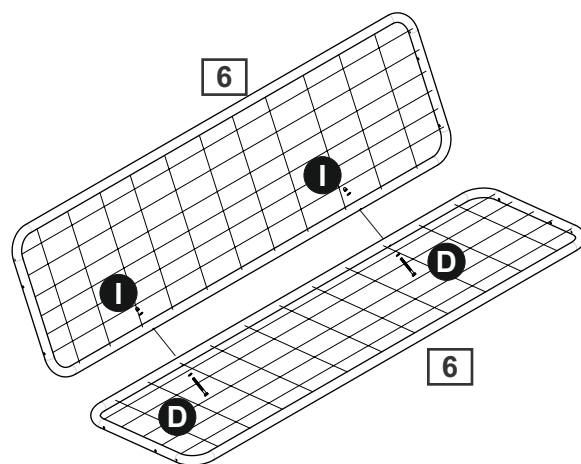

Step 13


Assemble the left armrest **7** with the seat support **6** using screws **E**, washers **L** and nuts **I**

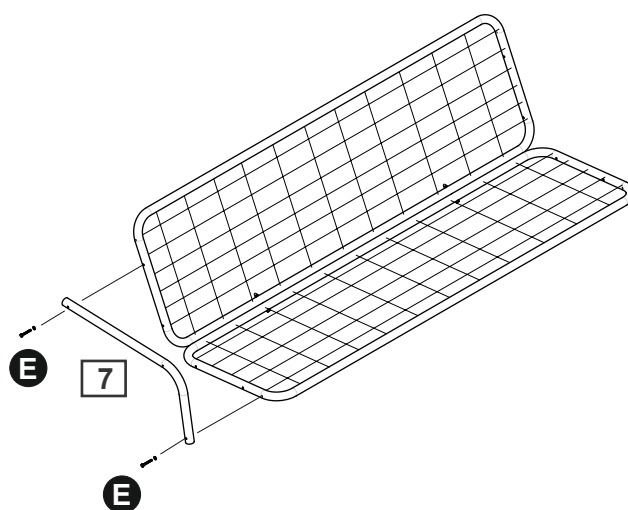

Assembly Instructions

Step 14


Assemble the right armrest **7** with the seat support **6** using screws **E**, washers **L** and nuts **I**

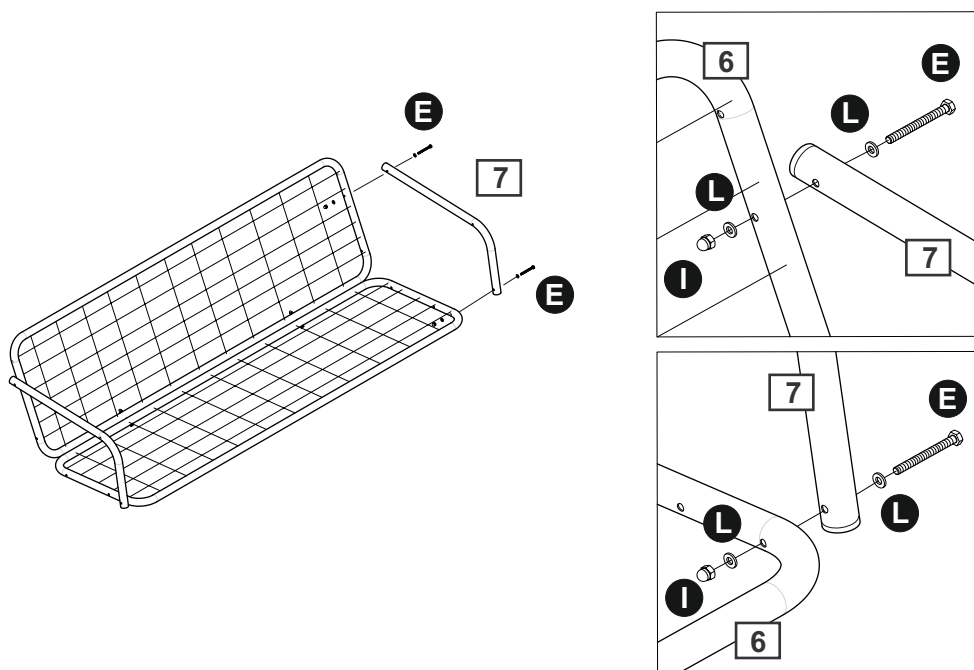

Step 15


Fix the plastic caps **T** onto the seat support bar **8**

4x

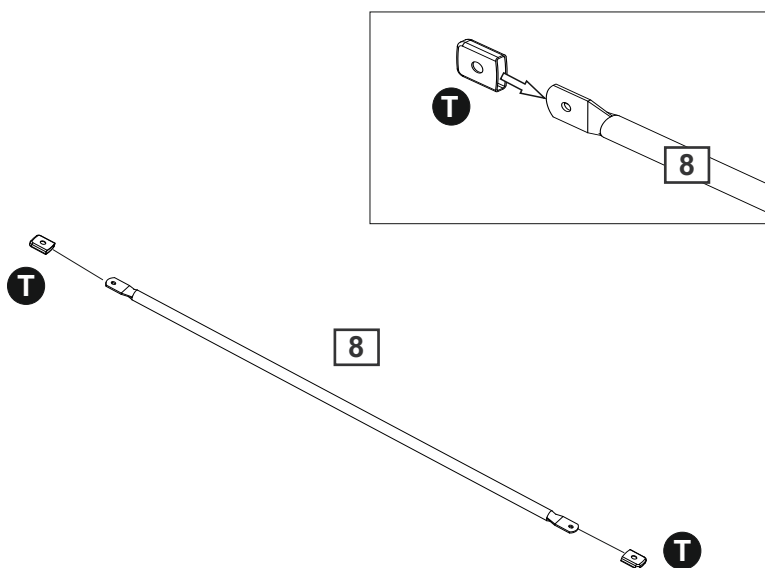

Step 16



Assemble the left back seat support bar **8** to the seat support **6** using screw **F**, washers **L** and nuts **I**

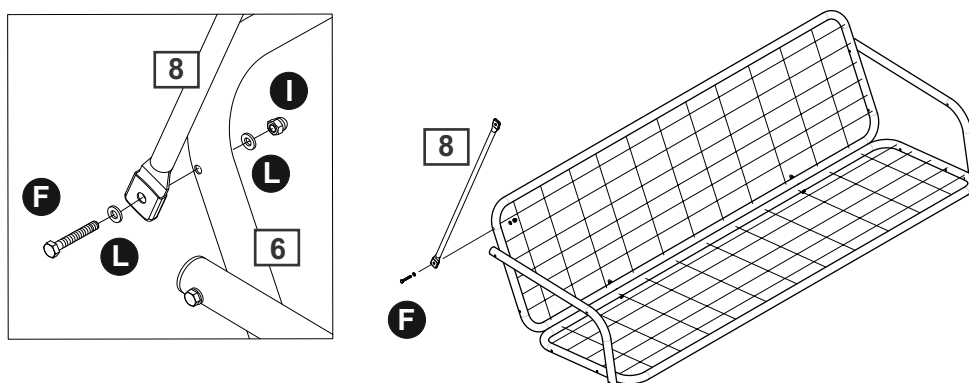

Assembly Instructions



Step 17

Assemble the right back seat support bar **8** to the seat support **6** using screw **F**, washers **L** and nuts **I**

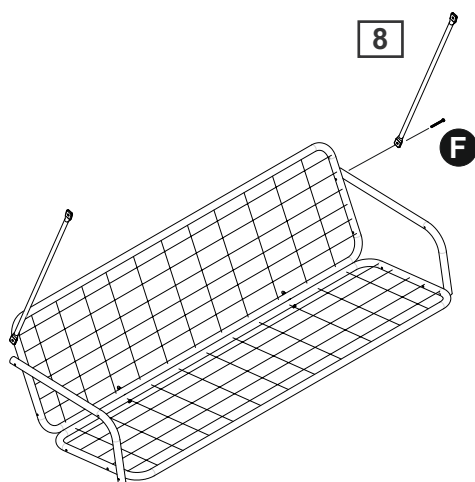



Step 18

Assemble the left front seat support bar **8** to the armrest **7** using screw **F**, washers **L** and nuts **I**

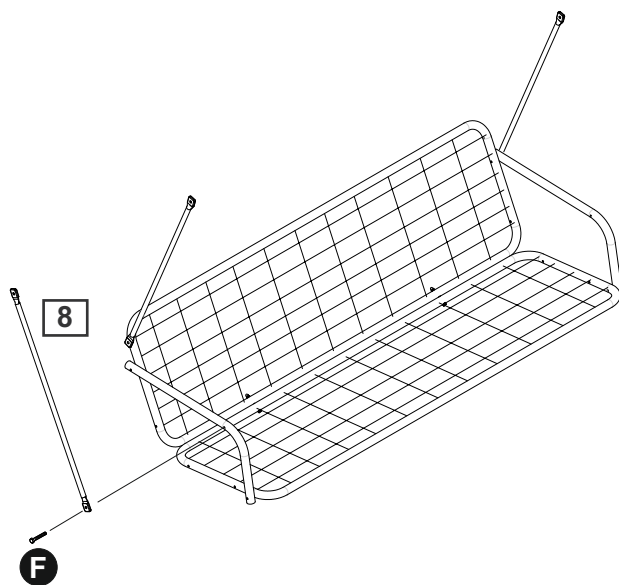

Step 19



Assemble the right front seat support bar **8** to the armrest **7** using screw **F**, washers **L** and nuts **I**

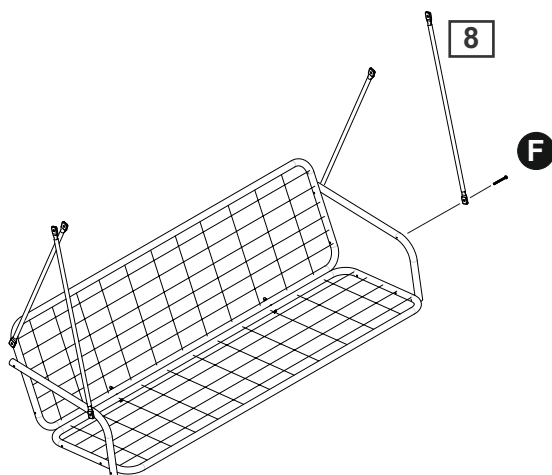

Assembly Instructions



Step 20

Insert the springs **N** into the seat support bars **8**

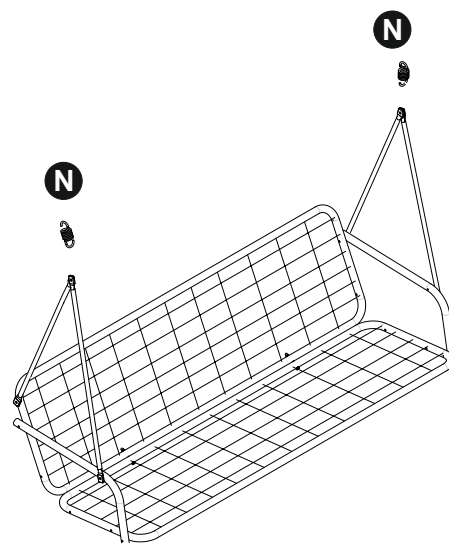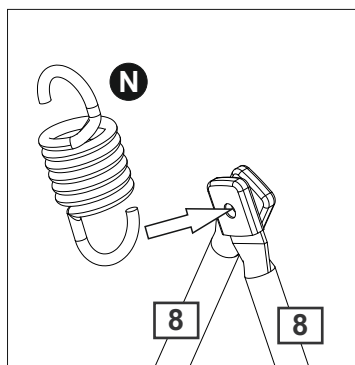

Step 21



Fix the spring **N** to the top **3**

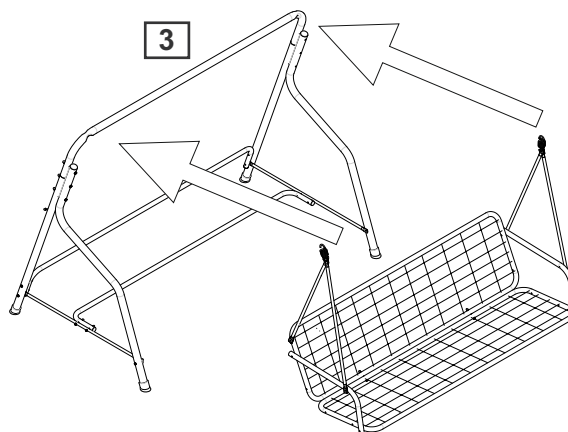

Step 22

Fix the nuts **J** to the pin **G**, deep in the longest thread.

2x

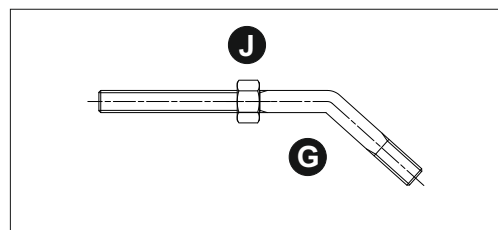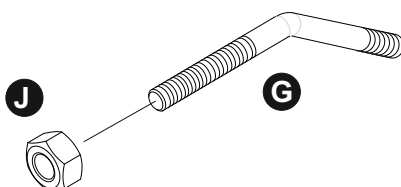


Assembly Instructions

Step 23

Insert the pin **G** through the plastic joint **R** by the shortest thread.
Push it as far as the nut **J** touches the plastic joint **R**



2x

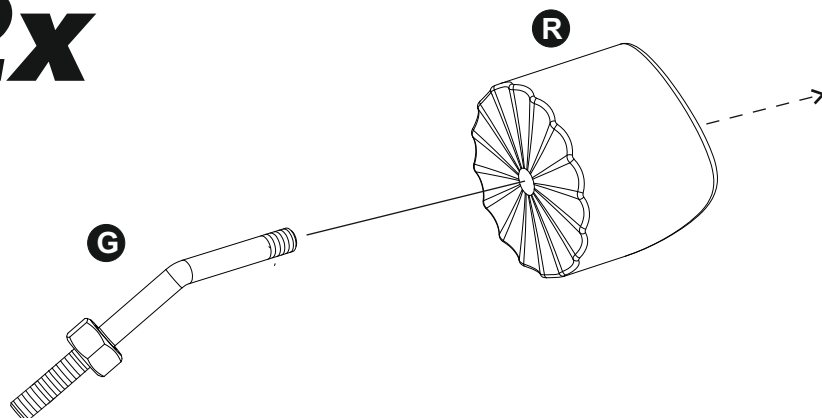

Step 24



Fix the plastic joint **R** to the top **3** using the washer **L** and the nut **I**

Note:
the longest thread of the pins **G** have to be horizontal after fixing

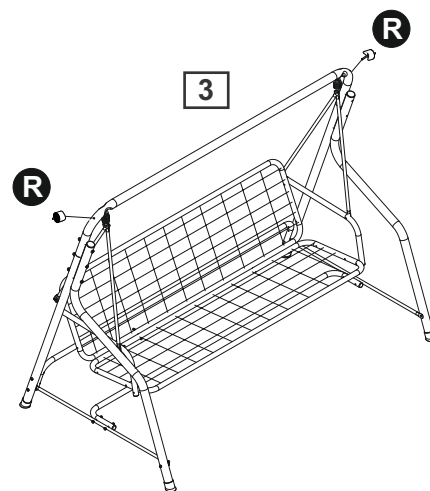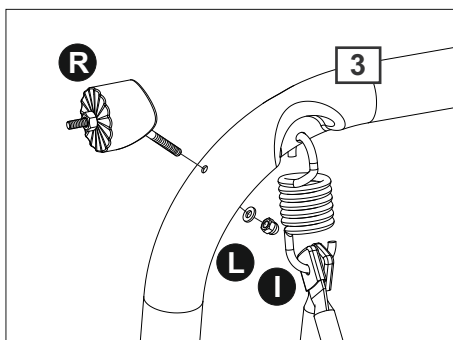

Step 25

Fix one roof bar **4** to the pin **G** using the washer **M** and the wheel **U**

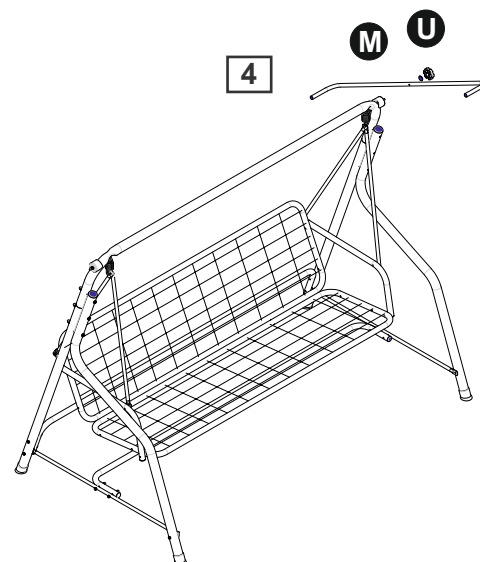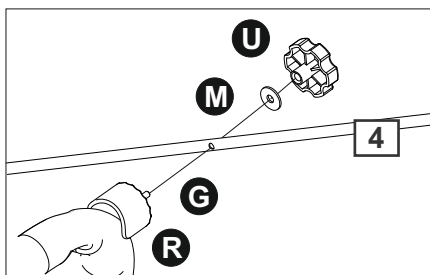


Assembly Instructions

Step 26



Insert the roof poles **5**
into the canopy's slots
11

Note:
Let the roof poles pass
through the complete
slots

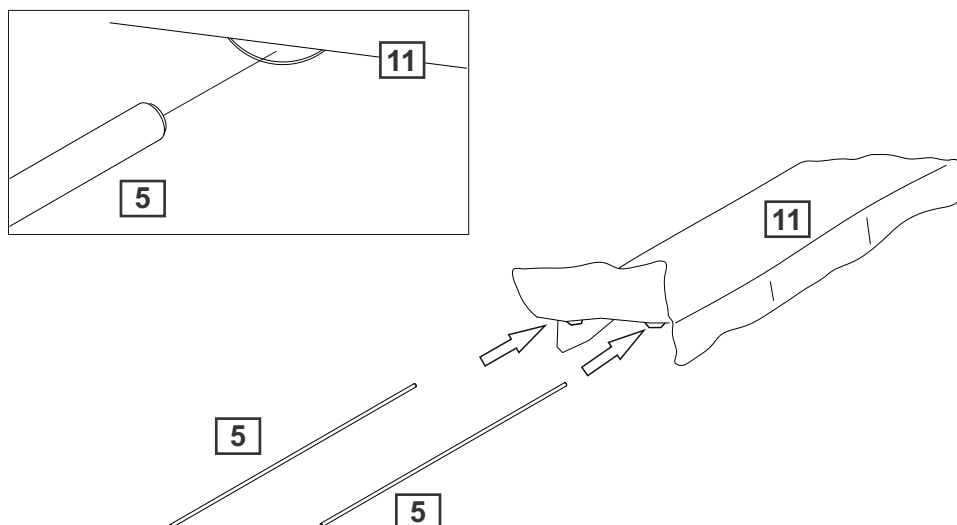


Step 27

Insert the roof poles **5**
into the assembled roof
bar **4**

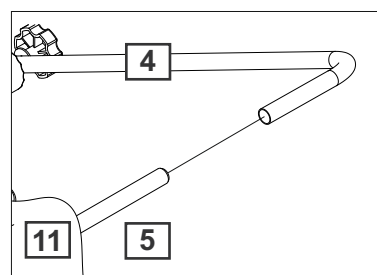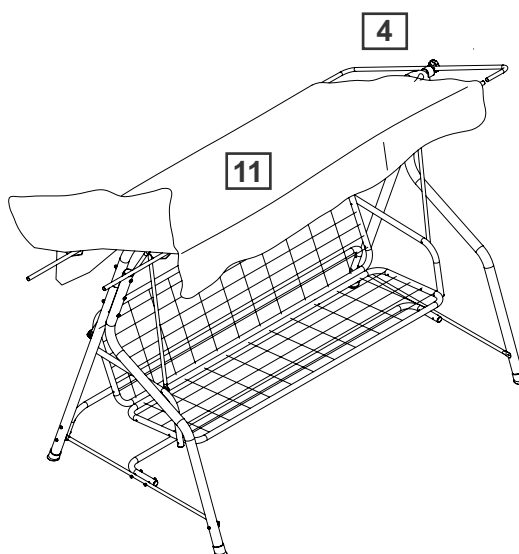

Step 28

Insert the roof poles **5**
into the other roof bar **4**

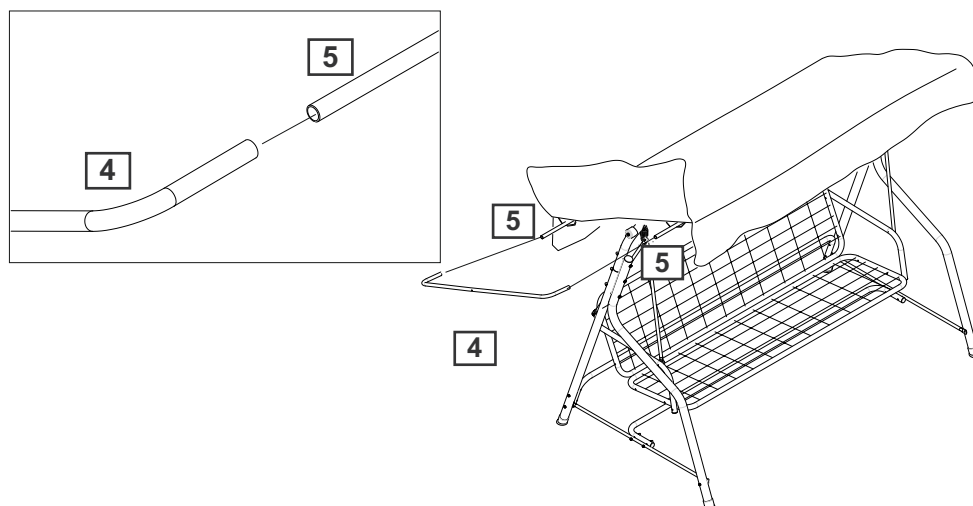

Assembly Instructions

Step 29

Fix the other roof bar **4** to the pin **G** using the washer **M** and the wheel **U**

Tighten completely all bolts.

Assembly is complete.

