


INSTRUCTIONS Easi-Lift Airer



Installation directly into the ground

Dig a hole around 50cm deep and 20cm square. Fill in part of the hole with your concrete mix and place the ground socket vertically in the centre. Continue to pour the rest of the concrete into the hole, ensuring the ground socket is held in an upright position. Allow this to set for around 48 hours before use.

Once the ground socket is installed, carefully place the rotary airer into the socket.

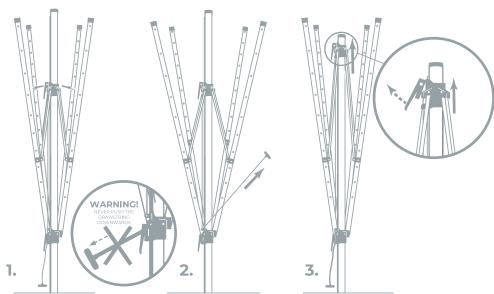


Gently pull the arms to loosen them from the clips. (1)

Pull the drawstring upwards to open the airer.

WARNING! Do not push the drawstring down. (2)

Adjust the height of the airer by moving the collar. (3)

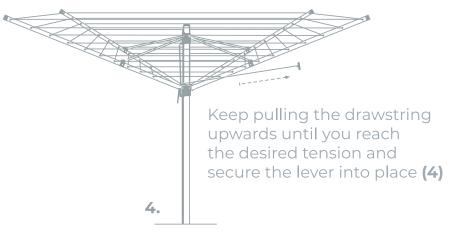

When not in use

Fold down the airer and store away safely when not in use or alternatively, use the rotary airer cover provided to protect the airer from adverse weather conditions.



ADDIS Housewares Limited guarantees each new airer product against all defects in materials or workmanship for a period of five years from the date of purchase, and agrees to repair or replace any defective product without charge. Valid proof of purchase is required. If you encounter a problem, please contact ADDIS directly on 0800 515 300.

IMPORTANT: This warranty does not cover damage resulting from accident, misuse, abuse or Lack of reasonable care. NO RESPONSIBILITY IS ASSUMED FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.



You should ensure that a suitable location for the airer is established making sure the rotary has room to rotate freely once the arms are fully extended.



www.addis.co.uk

Safety information on the cord.

WARNING This is not a toy and children should not play near this airer unsupervised. To avoid any danger of suffocation we suggest keeping the packaging away from small children and babies.