

CAST METAL BISTRO CHAIR

Simple Assembly Instructions – Please keep for future reference



PARTS AND FITTINGS FOR TWO CHAIRS



(A) Backrest x 2



(C) Chair Leg x 8



(B) Chair seat x 2



(D) Washers x 20



(E) Spring Washers x 20



(F) Nuts x 20

IMPORTANT

1. It is important not to overtighten nuts as this may cause damage to threads.
2. Do not sit on the table as this may cause damage.
3. To extend product life and appearance it is not recommended to leave your garden furniture outside during winter months.
4. Periodically check nut and bolts for tightness.

ASSEMBLY INSTRUCTIONS

1. Fit the backrest (A) to the seat (B) by inserting the prefixed studs into the two holes at the back of the seat. (See fig 1). Bolt together using washers (D), (E) and nuts (F). (See fig 2).


DO NOT OVER TIGHTEN.

2. Turn the unit upside down. Fix the back legs and then the front legs (C) to the chair seat (B) by fitting the prefixed studs into the two holes in the top of the legs. Bolt together using washers (D), (E) and nuts (F). (See fig 2).

DO NOT OVER TIGHTEN.

3. The rubber screw caps at the bottom of the four legs can be adjusted, if necessary, to make the legs level with the ground.

fig. 1

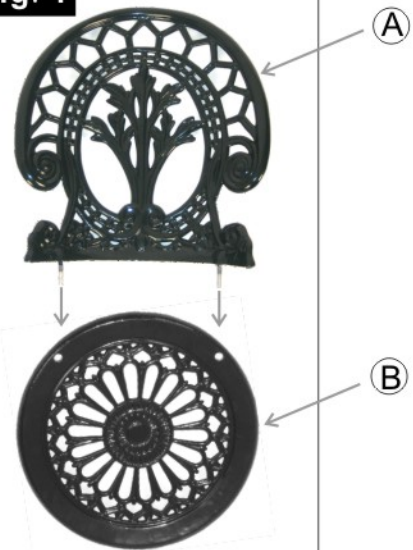

Rubber screw cap

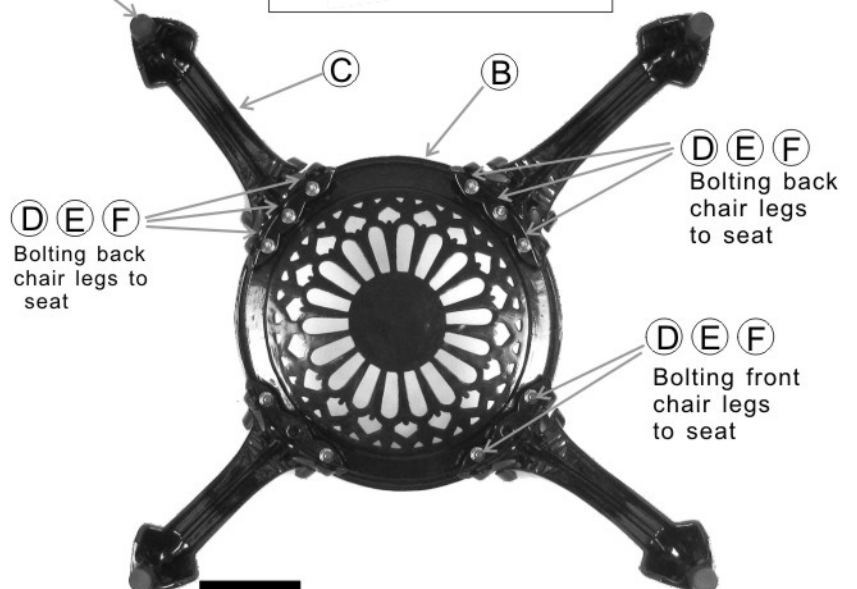


fig. 2

View of the underside