

Series 2, Canopy cooker hood, 53 cm, Anthracite DLN53AA70B



DWZ0IN0A0 Standard odor filter (replacement)
DWZ0IN0T0 Standard recirculation kit

Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.

- Quiet extraction with powerful performance
- High extraction rate - for continuously clean air in the kitchen.
- LED Illumination: The energy-saving lighting provides bright and clear lighting for the hob area.
- Adjust the extraction intensity according to your cooking needs.

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): ... 208mm x 493.0mm x 257mm mm
Height of the appliance: 208 mm
Minimum distance above an electric hob: 500 mm
Minimum distance above a gas hob: 650 mm
Net weight: 5.0 kg
Type of control: mechanical
Number of speed settings: 3
Max. air extraction: 302 m³/h
Max. air recirculation: 300 m³/h
Maximum Air flow: 302 m³/h
Number of lights: 2
Noise level: 62 dB(A) re 1pW
Diameter of air outlet: 120 mm
Grease filter material: Washable aluminium
EAN code: 4242005095391
Connection rating: 121 W
Fuse protection: 5 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: GB plug
Installation typology: Built-in



4 242005 095391

Series 2, Canopy cooker hood, 53 cm, Anthracite DLN53AA70B

Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 302 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 62 dB dB*

Features

- Slider switch control for extractor speeds and light
- 3 power levels
- Single motor
- 2 x 3W LED
- Colour Temperature: 2700 K
- 1 removable metal grease filter cassette
- Installation: integrated

Design

- Canopy hood
- Slider switch control
- Mechanical

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591: max. 302 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Power rating: 121 W
- Light Intensity: 78 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 208-208 x 534 x 300 mm
- Dimensions recirculating (HxWxD): 208-208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 67.7 kWh/year*


Optional accessories

- Recirculating kit DWZ0IN0A0

* In accordance with the EU-Regulation No 65/2014

**Series 2, Canopy cooker hood, 53
cm, Anthracite
DLN53AA70B**



Measurements in mm

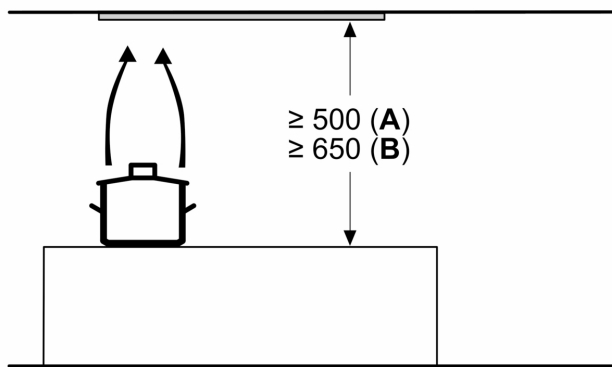


From upper edge of pan support

A: Electric


B: Gas

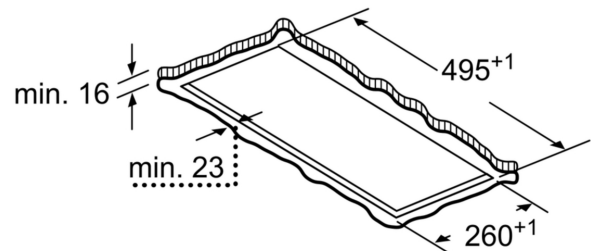

measurements in mm

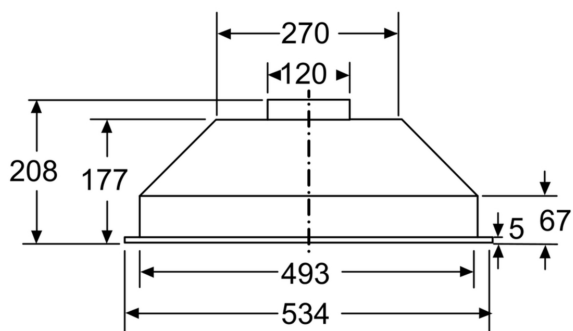

measurements in mm

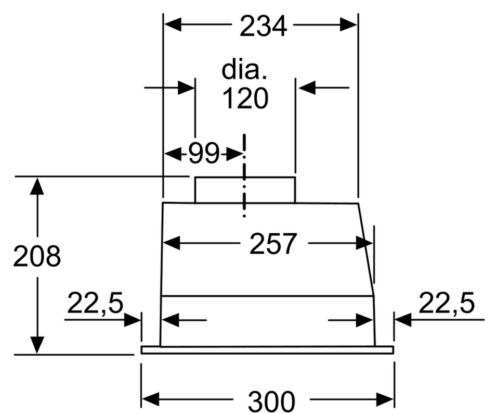

measurements in mm

