


**Series 4, Gas hob, 60 cm, Tempered glass, Black
PNP6B6K40**

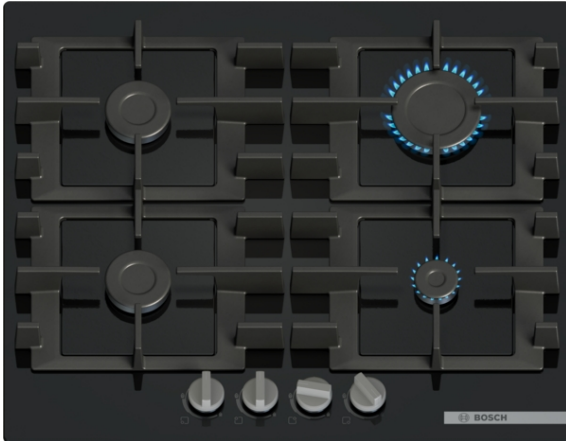

Optional accessories

HEZ32WA00 : Wireless food thermometer
HEZ9SE040 : 4 pieces Set

The gas hob with dishwasher suitable cast iron pan supports, Ergonomic sword dials, and a Main Switch for precise control.

- **Ergonomic sword dials:** with raised center for precise adjustments.
- **Tempered Glass:** for strength and aesthetic.
- **Dishwasher-safe pan supports:** Easy, scrub-free cleaning.
- **Semi-continuous pan supports:** smaller for easy cleaning, yet providing a seamless cooking surface.
- **Safety gas cut-off:** ensures safety by instantly cutting off gas supply if the flame goes out.

Technical Data

Product name/family : gas hob w integrated controls

Built-in / Free-standing : Built-in

Energy input : Gas

Total number of positions that can be used at the same time :
4

Type of control setting devices : sword knobs

Required niche size for installation (HxWxD) : 45 x 560-562 x
480-492 mm

Width of the appliance : 590 mm

Dimensions : 57.4x590x520 mm

Dimensions of the packed product (HxWxD) : 141 x 615 x 578
mm

Net weight : 15.2 kg

Gross weight : 16.4 kg

Residual heat indicator : without

Location of control panel : Front

Basic surface material : Tempered glass

Color of surface : Black, Black

Color of frame : Black

Length electrical supply cord : 100.0 cm

EAN code : 4242005437856

Gas connection rating : 7500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 50; 60 Hz



Series 4, Gas hob, 60 cm, Tempered glass, Black PNP6B6K40

The gas hob with dishwasher suitable cast iron pan supports, Ergonomic sword dials, and a Main Switch for precise control.

ordered via the customer service. For nozzle change, please contact the customer service.

- Dimensions of the product (HxWxD mm): 57.4 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

Design

- Tempered glass surface, Black
- Cast iron pan supports with rubber feet

Usage convenience

- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 gas burners:
- Left front: standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: economy burner up to 1 KW (depending on gas type)

Cleaning

- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.


Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be

**Series 4, Gas hob, 60 cm, Tempered glass,
Black
PNP6B6K40**

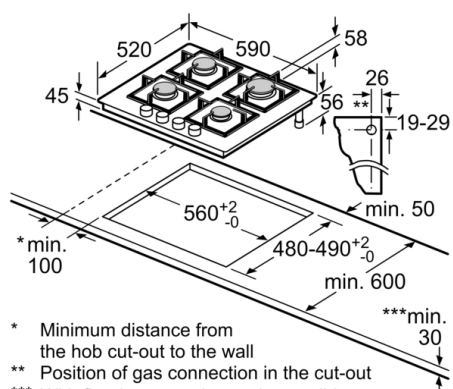

- * Minimum distance from the hob cut-out to the wall
 - ** Position of gas connection in the cut-out
 - *** With fitted oven underneath, possibly more; see space requirements for the oven
- measurements in mm