Product Information Sheet

Supplier's name or trade mark: Asia Grobal Industries Co., Limited			
Model identifier: LAMP 5X -WW		Issue date: May 20th, 2026	
Type of light source: 8 5 1 7 6 2 9			
Lighting technology used:	LED	Non-directional or directional:	Non-directional
Light source cap-type (or other electric interface)	n/a		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No
Product parameters			
Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	D
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	94 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that	2,585
On-mode power (P_{on}), ex-pressed in W	n/a	Standby power (P_{sb}), expressed in W and rounded to the sec- ond decimal	n/a
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	n/a	Colour rendering index, rounded to the nearest integer, or the range of CRI values that can be set	52.4
Outer dimensions without separate control gear, lighting control parts and non- lighting control parts, if any(millimetres) — Height	120	Spectral power distribution in the range 250 nm to 800 nm at full-load	See image in last page
Width	180		
Depth	100		
Claim of equivalent power[a]	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0.4856 0.4399
Parameters for LED and OLED light sources:			
R9 colour rendering index value	48.3	Survival factor	1.00
the lumen maintenance factor	0.905		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ1)	n/a	Colour consistency in McAdam ellipses	6.7
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	n/a	If yes then replacement claim (W)	n/a
Flicker metric (Pst LM)	N/A for non-main light source	Stroboscopic effect metric (SVM)	0.0
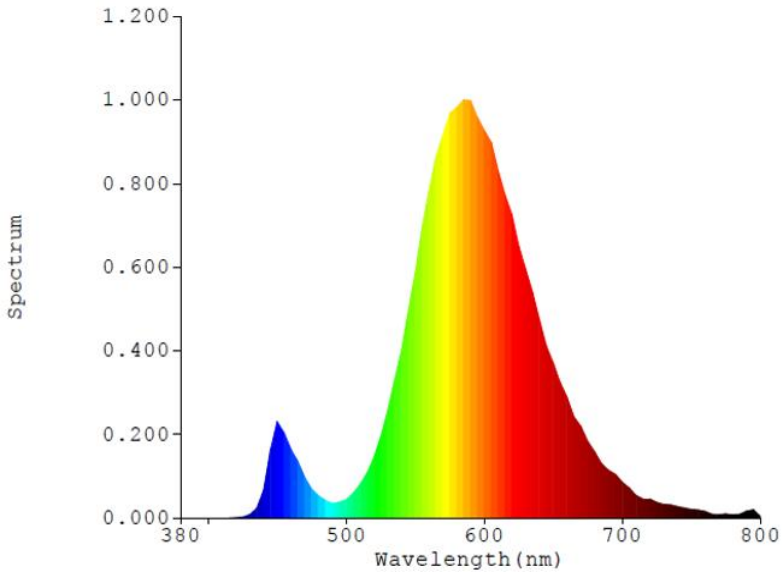
PHOTO OF THE APPLIANCE: