


3 SEATER SWING HAMMOCK

Assembly Instructions - Please keep for future reference

8795087

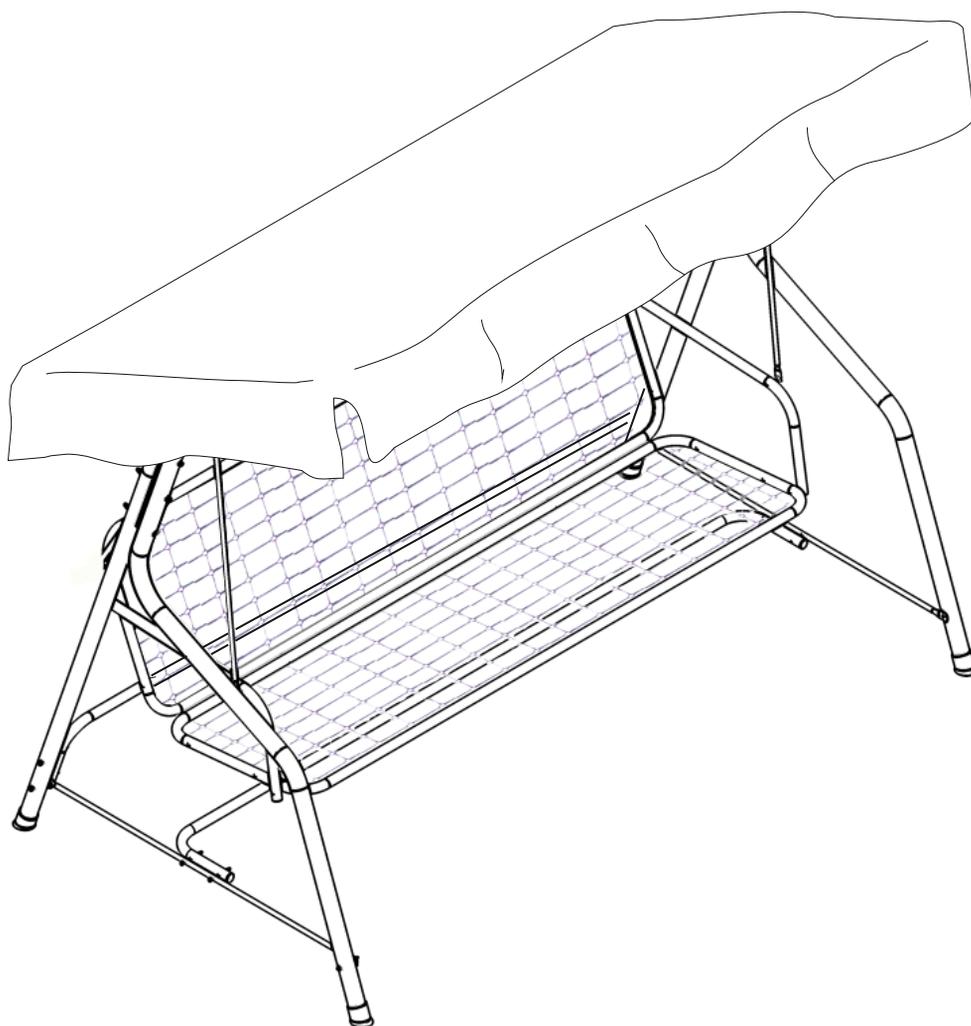

Dimensions

Width - 188 cm
Depth - 113 cm
Height - 154 cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**
Argos = 0345 6400800



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.

- Remove all fittings from the plastic bags and separate them into their groups.

- **Plump up the cushions and let them rest for 24 hours to regain their original dimensions**

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.

- Parts of the assembly will be easier with 2 people.



power drill is set on a low torque setting.

- To reduce the likelihood of damaging your product please ensure that your

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts


- Regularly check and ensure that all bolts and fittings are tightened properly.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

Customer Helpline: Argos = 0345 6400800


Please check you have all the components listed below




1 Back leg x 2 (137.5x4.5 cm)

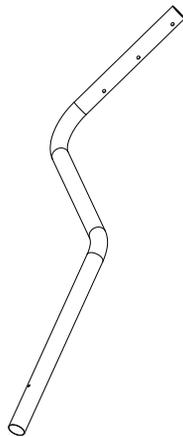


2 Front leg x 2 (150x34 cm)

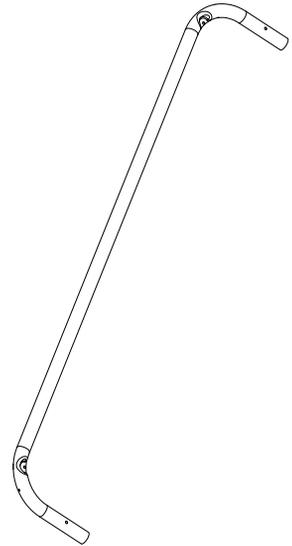

3 Top x 1 (178 x 35 cm)



4 Roof bar x 2 (118 x 17 cm)




5 Roof pole x 2 (169 x 1.5 cm)




6 Seat support x 1 (150 x 48 cm)
Nr.18 Springs




7 Back x 1 (150x48 cm)
Nr. 3 springs




8 Amrest x 2 (66 x 21 cm)




9 Seat support bar x 4
(79 x 1.6cm)

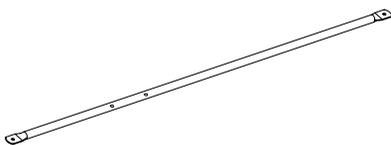

10 Side bar x 2 (104 x 2.5 cm)

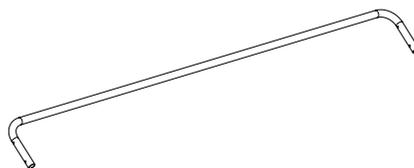

11 Cross bar x 2 (178 x 21 cm)




12 Canopy x 1 (243 x 160 cm)




Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.




M8 x 10cm Screw x 6




M6 x 8cm Screw x 4




M6 x 6cm Screw x 8



M6 x 5,5cm Screw x 4



M6 x 4cm Screw x 4

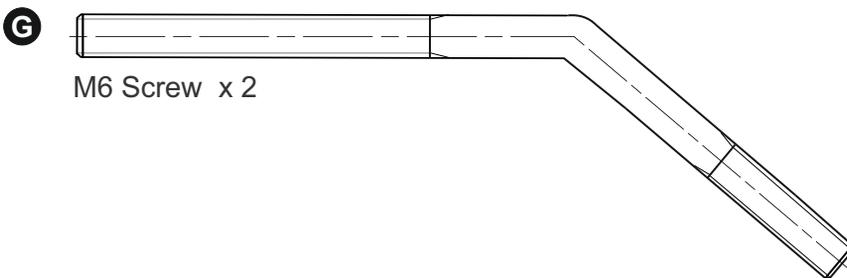

M6 Screw x 2


Tools required



(Supplied)

Ruler - Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170










The screws length is measured from the head to the point (30mm screw shown) .

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


<p>H</p>  <p>M8 Nut x 6</p>	<p>I</p>  <p>M6 Nut x 22</p>	<p>J</p>  <p>M6 Nut x 2</p>
<p>K</p>  <p>Ø8 x 12</p>	<p>L</p>  <p>Ø6 x 36</p>	<p>M</p>  <p>Ø6 x 2</p>
<p>N</p>  <p>Spring x 2</p>	<p>O</p>  <p>28 x 2.5 cm x 2</p>	<p>P</p>  <p>Ø45 x 2</p>
<p>Q</p>  <p>Ø45 x 4</p>	<p>R</p>  <p>x 2</p>	<p>S</p>  <p>x 4</p>
<p>T</p>  <p>x 8</p>	<p>U</p>  <p>x 2</p>	<p>V</p>  <p>Ø28 x 8</p>

Assembly Instructions

Step 1

Insert the plastic foot **Q** onto the end of the back legs **1**

2x

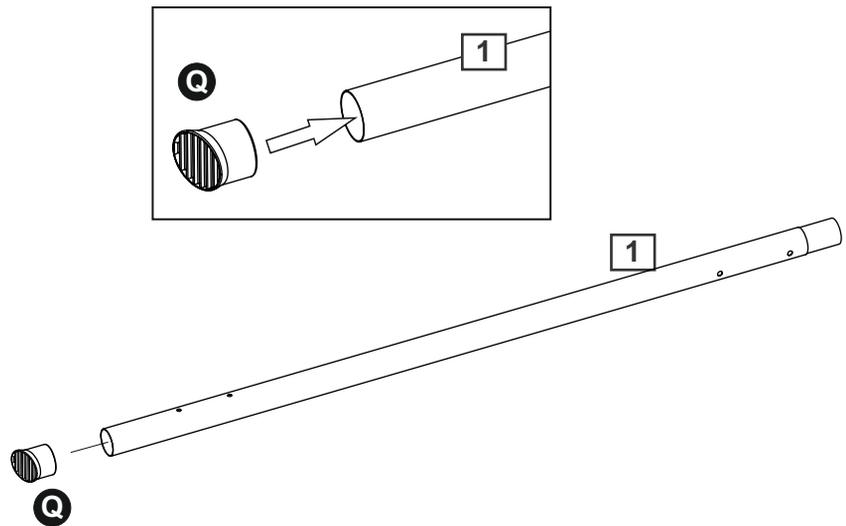


Step 2


a: Insert the plastic cap **P** into the end of front legs **2**

Note:
Pay attention to the position of the holes


2x

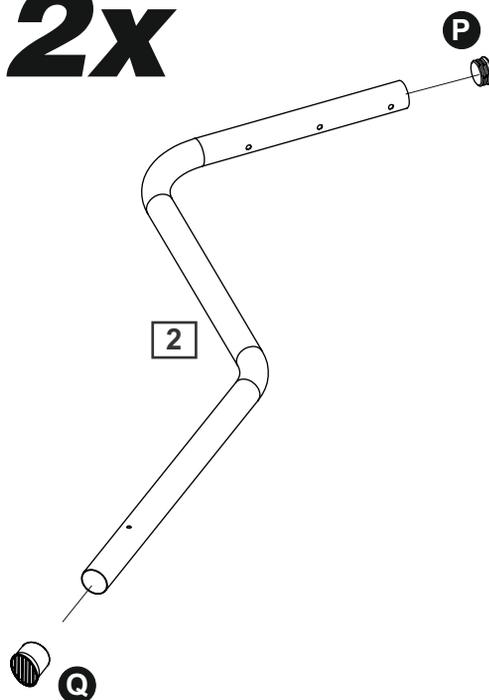

a:

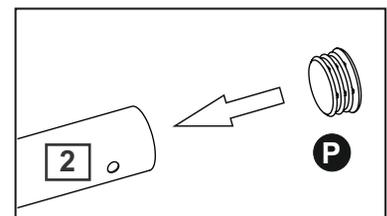

b:

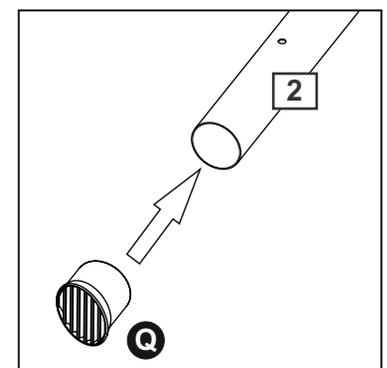

b: Insert the plastic foot **Q** onto the other end of the front legs **2**



Assembly Instructions

Step 3

Assemble back leg **1** and front leg **2** together with plastic spacer **O** using screws **A**, washers **K** and nuts **H**.



Note:
Do not fully tighten bolts.
Repeat with the remaining legs.

2x

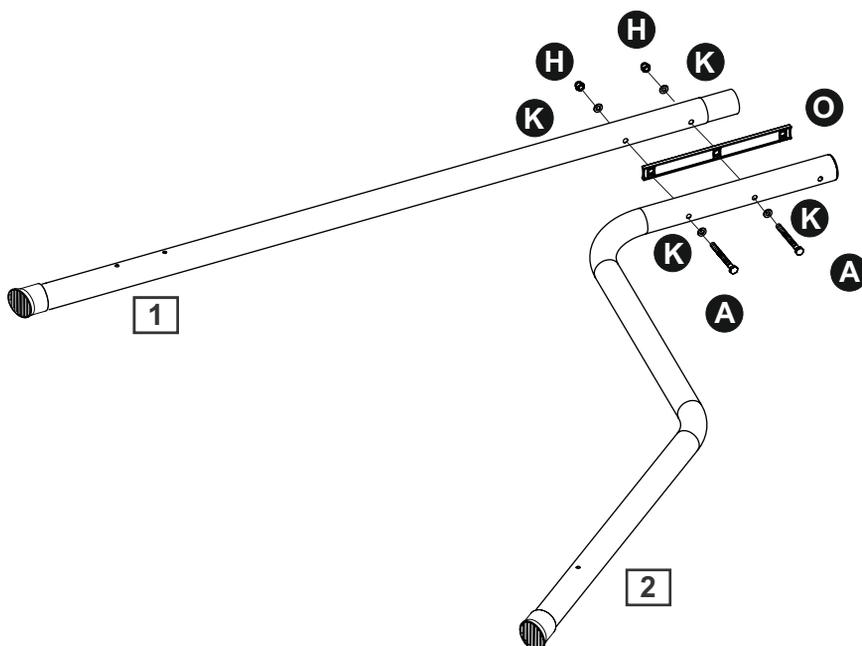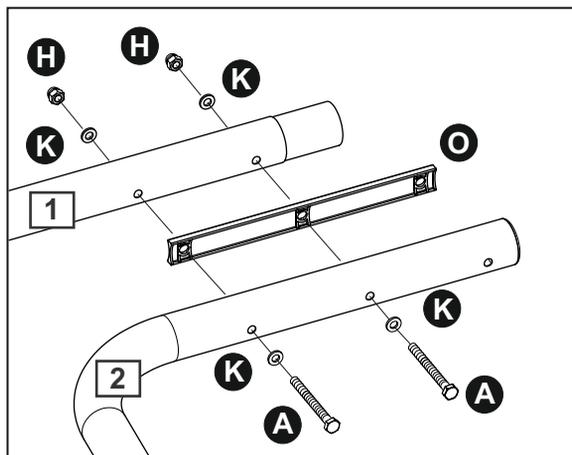

Step 4

Assemble the top **3** with the legs using screws **A**, washers **K** and nuts **H**.

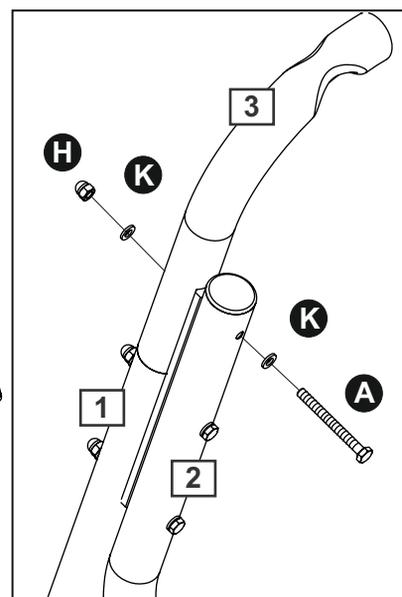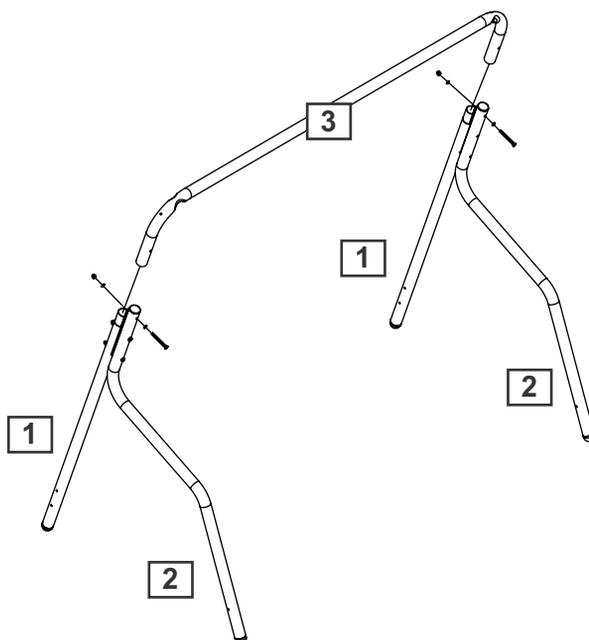


Assembly Instructions

Step 5

fix the plastic caps **S** onto the side bar **10**





2x

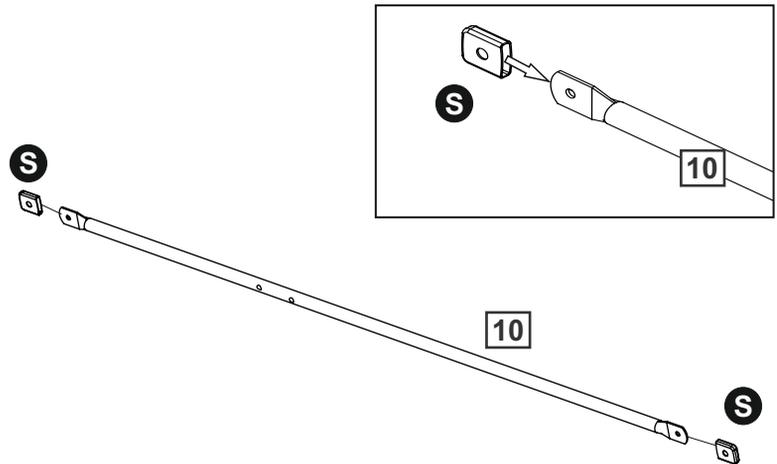

Step 6



Assemble the side bar **10** with the legs using screws **D**, washers **L** and nuts **I**

Note:
Pay attention to the position of the holes

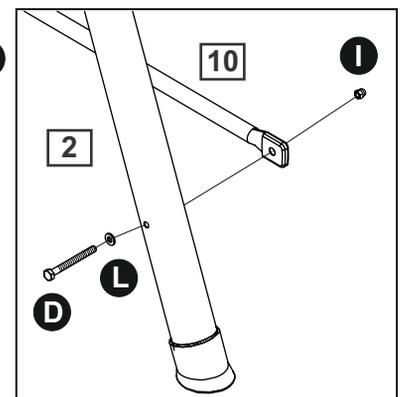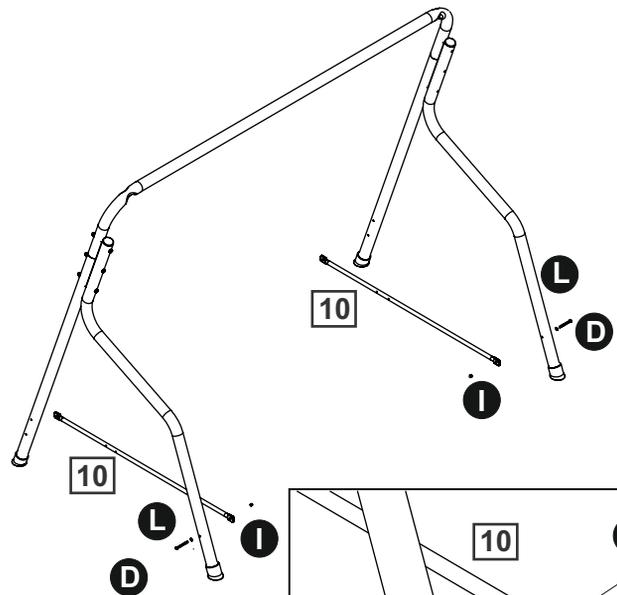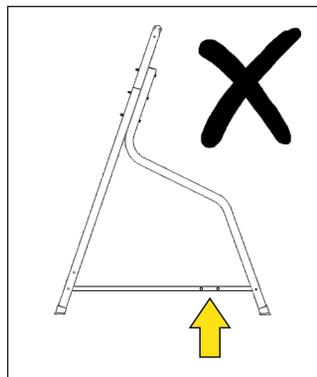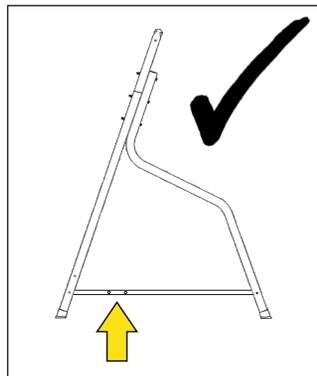

Step 7

Insert the plastic caps **V** into the end of one cross bar **11**

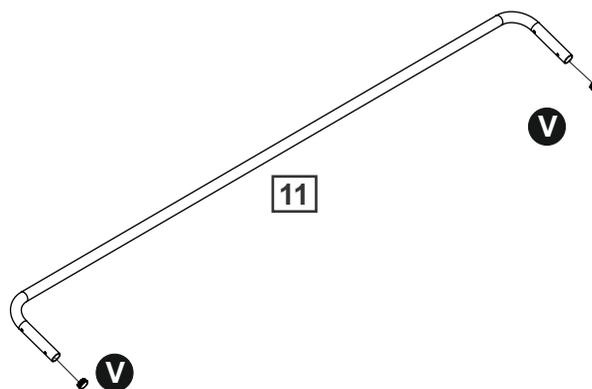


Assembly Instructions

Step 8


Assemble the cross bar **11** with the back legs **1** using screws **B**, washers **L** and nuts **I**

Note:
Do not fully tighten bolts.

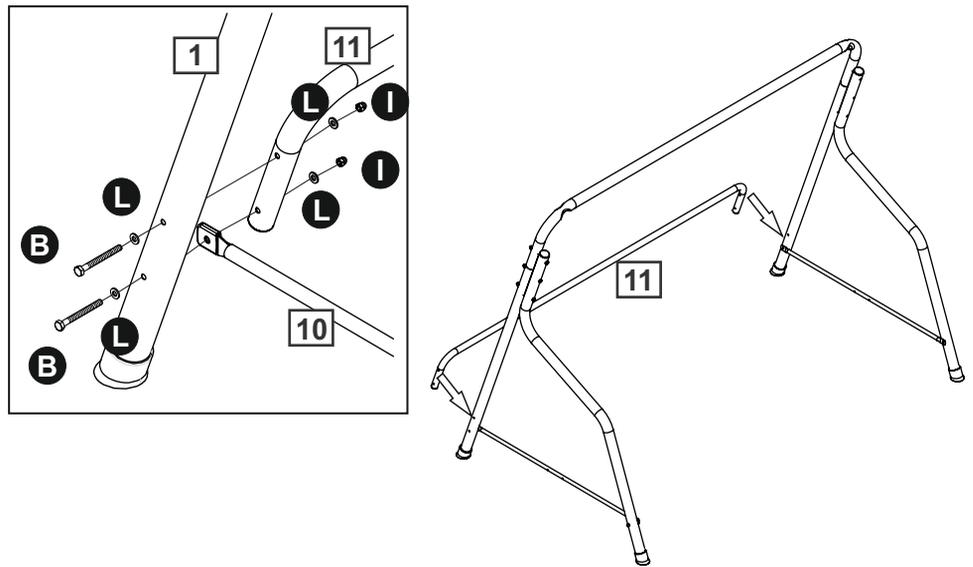

Step 9


Insert the plastic caps **V** into the end of the other cross bar **11**

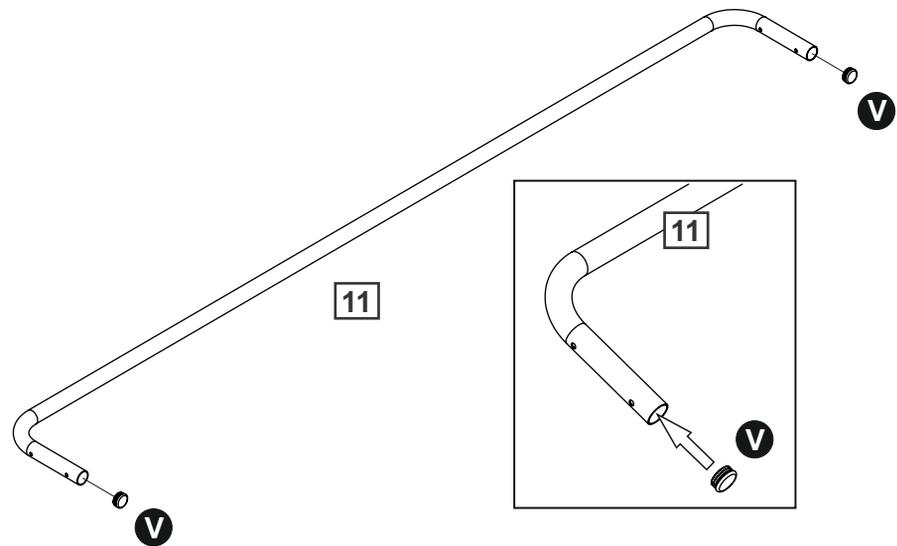

Step 10

Assemble the cross bar **11** with the side bars **10** using screws **D**, washers **L** and nuts **I**

Note:
Do not fully tighten bolts.



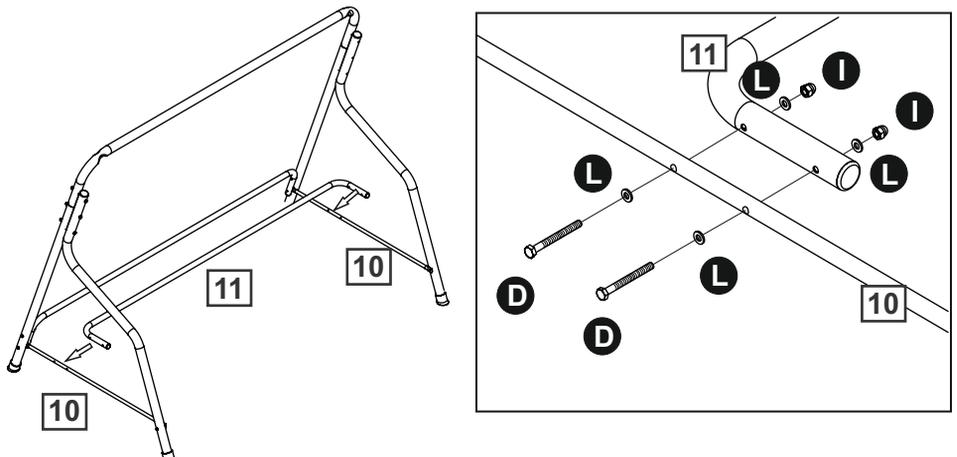


Assembly Instructions

Step 11





Insert the plastic caps **V** into the end of the armrests **8**

2x

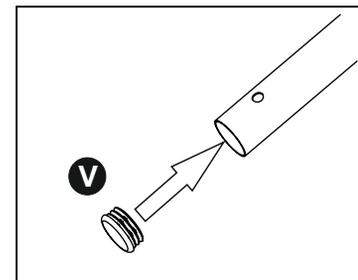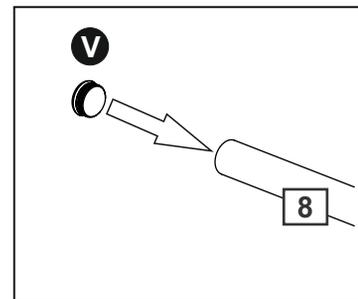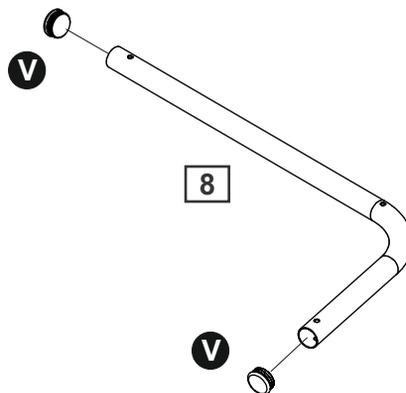

Step 12


Assemble the seat support **6** and back **7** together using screws **D**, washers **L** and nuts **I**

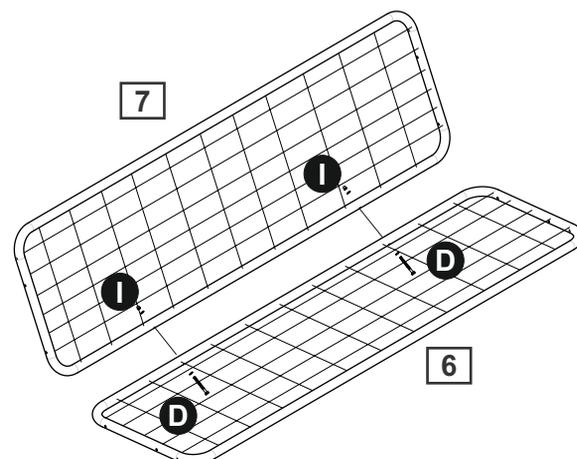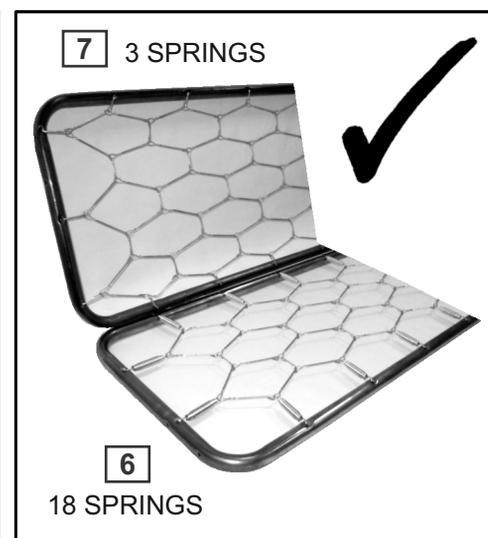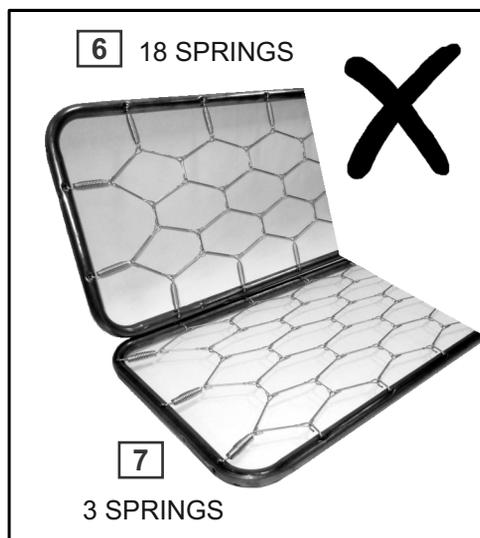

Assembly Instructions


Step 13

Assemble the left armrest **8** with the seat support **6** and back **7** using screws **E**, washers **L** and nuts **I**

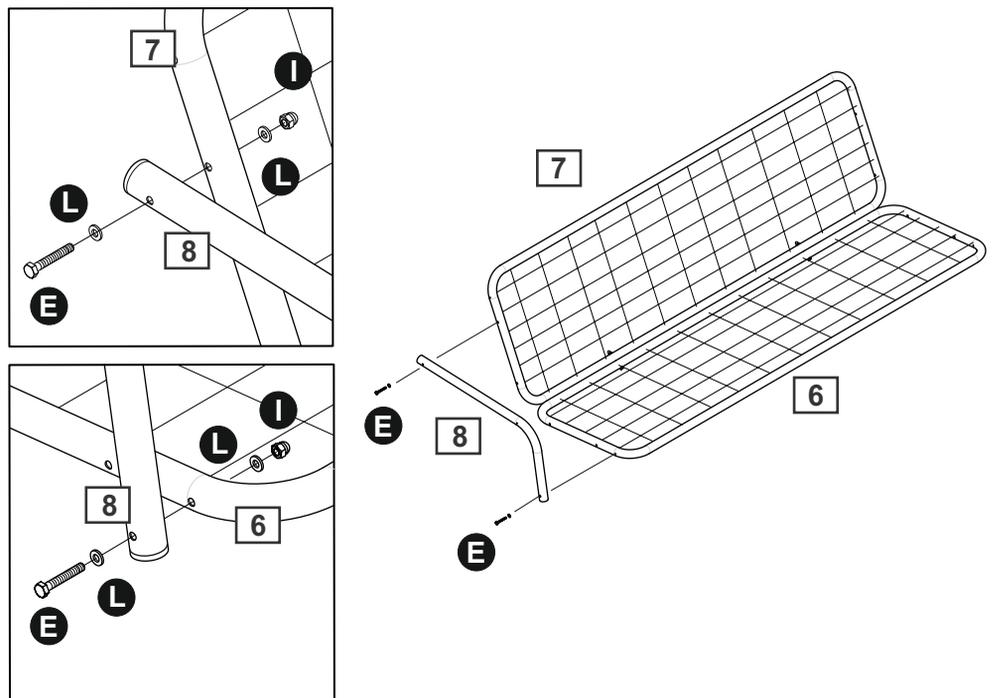


Step 14

Assemble the right armrest **8** with the seat support **6** and back **7** using screws **E**, washers **L** and nuts **I**

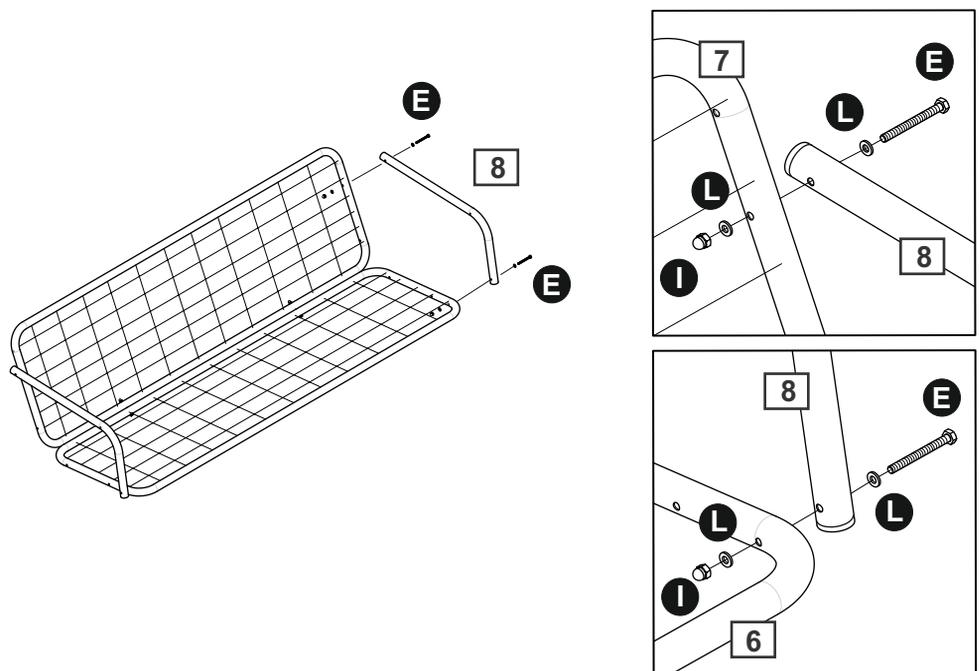

Step 15



Fix the plastic caps **T** onto the seat support bar **9**

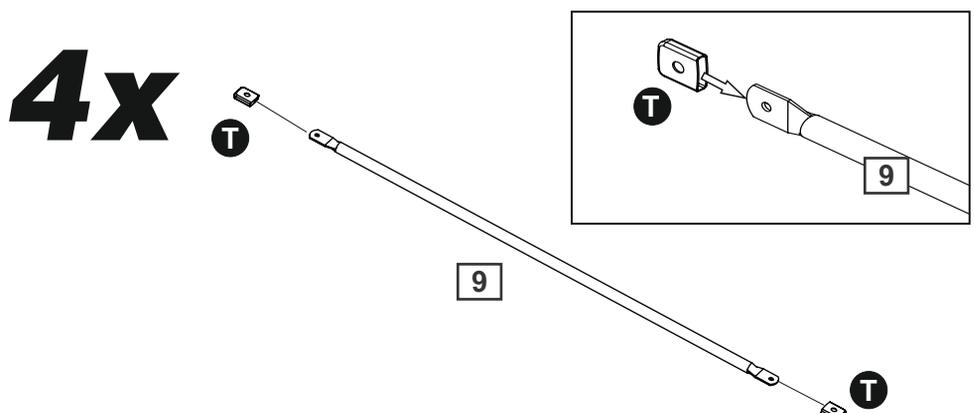

Assembly Instructions



Step 16

Assemble the left bar **9** to the back **7** using screw **F**, washers **L** and nuts **I**

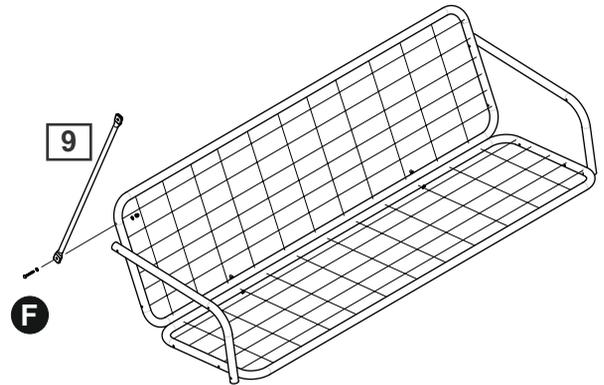



Step 17

Assemble the right bar **9** to the back **7** using screw **F**, washers **L** and nuts **I**

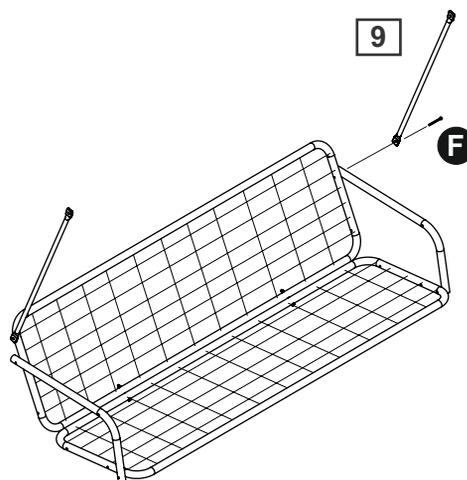

Step 18


Assemble the left front bar **9** to the armrest **8** using screw **F**, washers **L** and nuts **I**

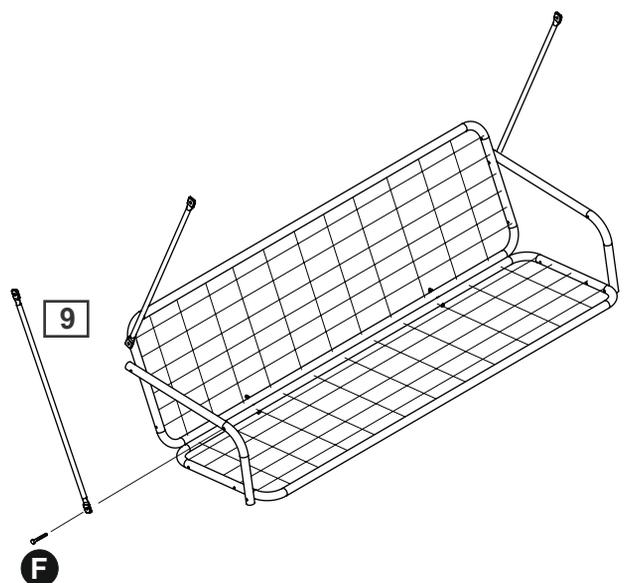

Assembly Instructions


Step 19

Assemble the right front bar **9** to the armrest **8** using screw **F**, washers **L** and nuts **I**

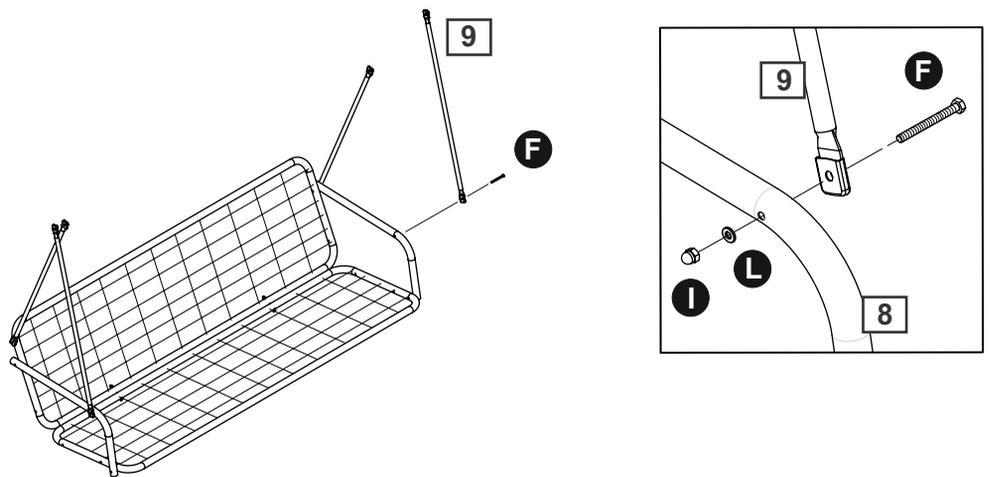


Step 20

Insert the springs **N** into the seat support bars **9**

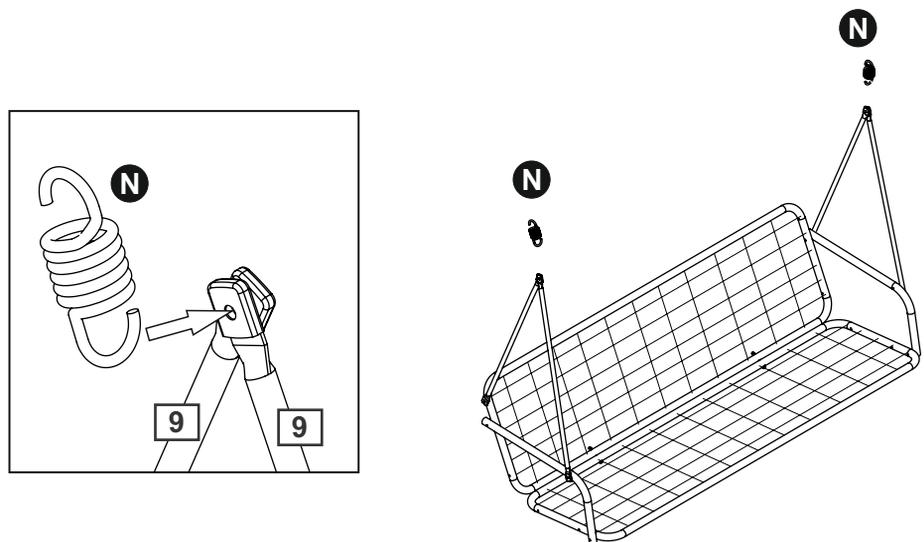

Step 21

Fix the spring **N** to the top **3**


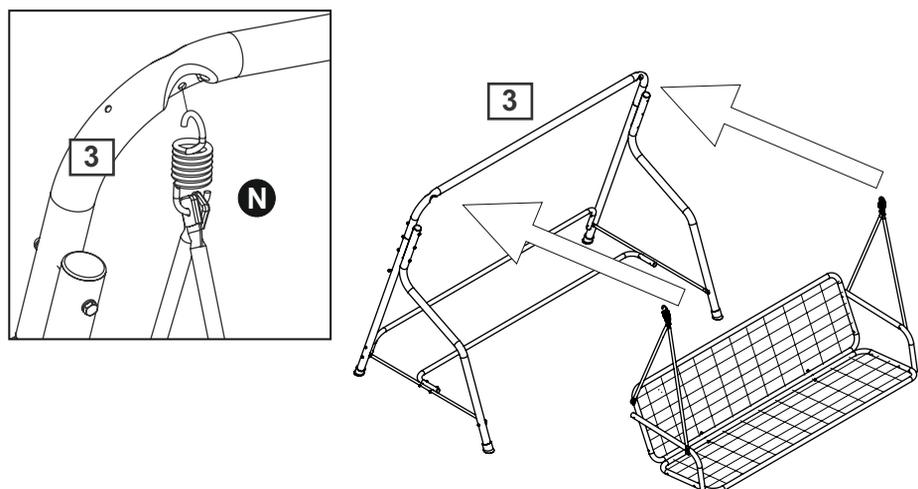


Assembly Instructions

Step 22

Fix the nuts **J** to the pin **G**, deep in the longest thread.





2x

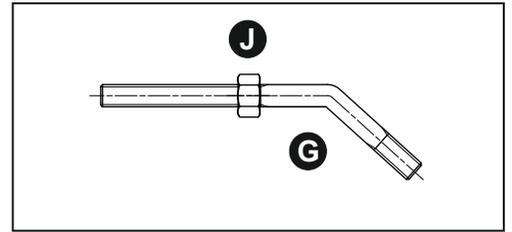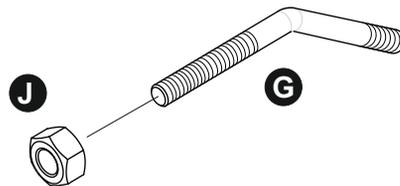

Step 23

Insert the pin **G** through the plastic joint **R** by the shortest thread.
Push it as far as the nut **J** touches the plastic joint **R**.

2x

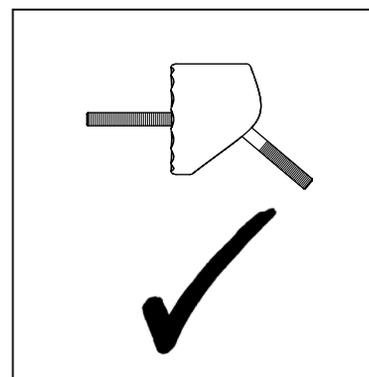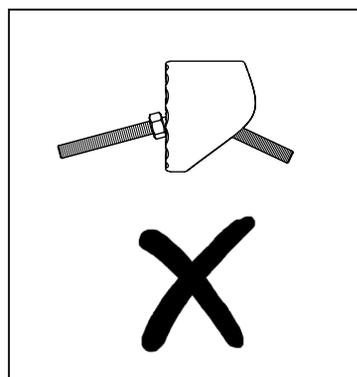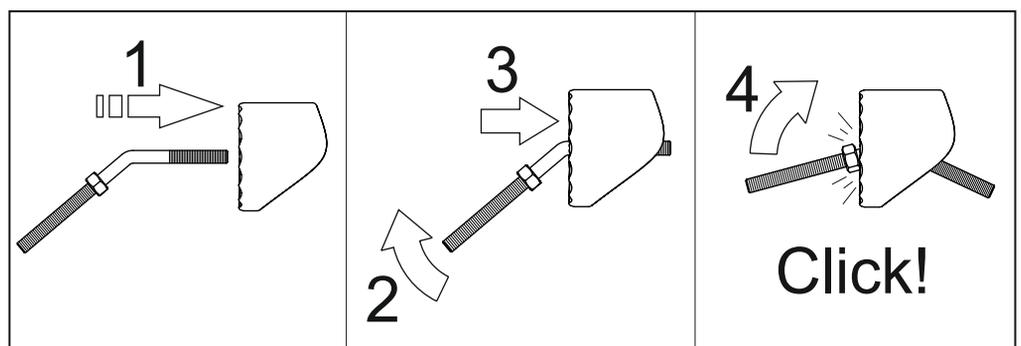
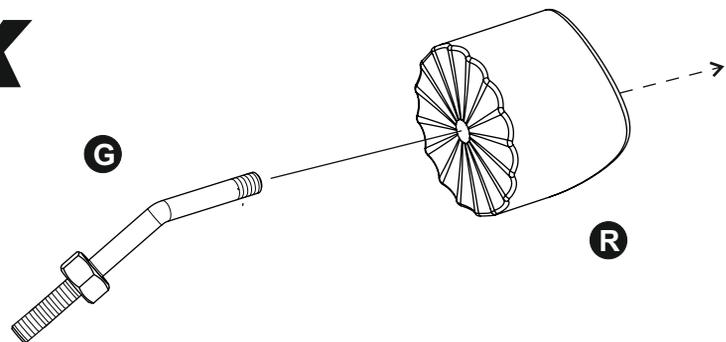


Assembly Instructions

Step 24



Fix the plastic joint **R** to the top **3** using the washer **L** and the nut **I**

Note:
the longest thread of the pins **G** have to be horizontal after fixing

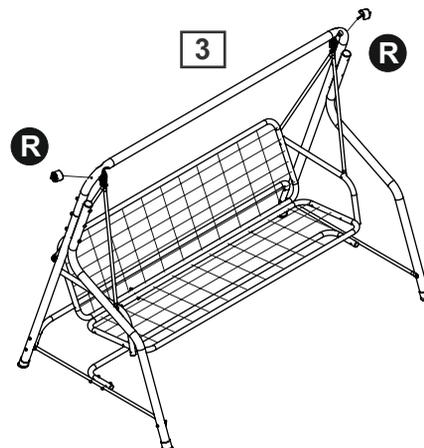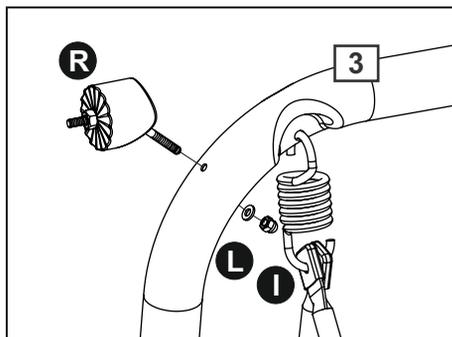

Step 25



Fix one roof bar **4** to the pin **G** using the washer **M** and the wheel **U**

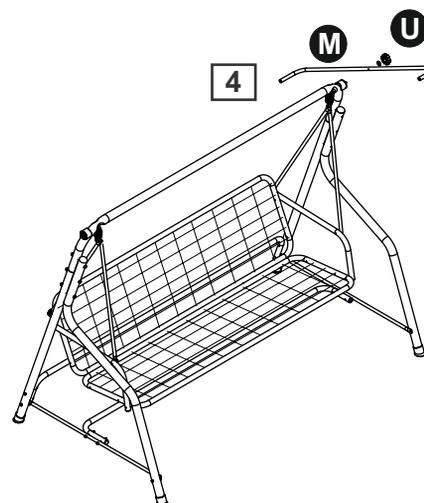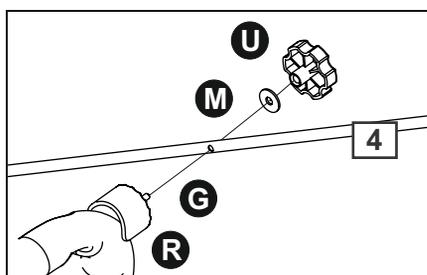

Step 26

Insert the roof poles **5** into the canopy's slots **12**


Note:
Let the roof poles pass through the complete slots

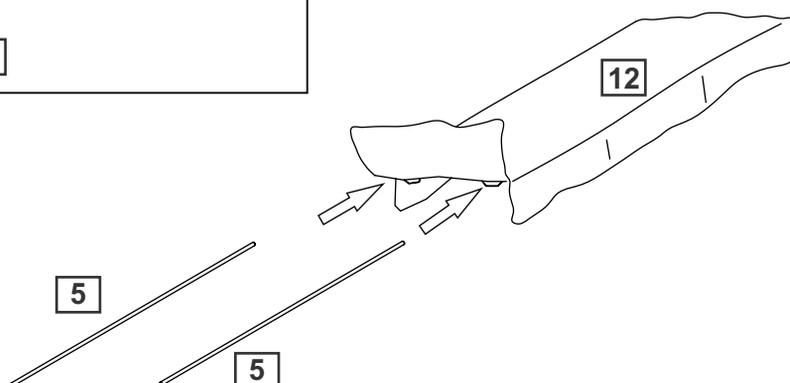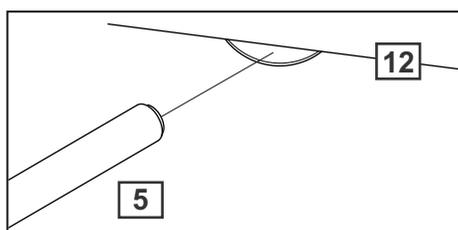

Assembly Instructions


Step 27

Insert the roof poles **5** into the assembled roof bar **4**

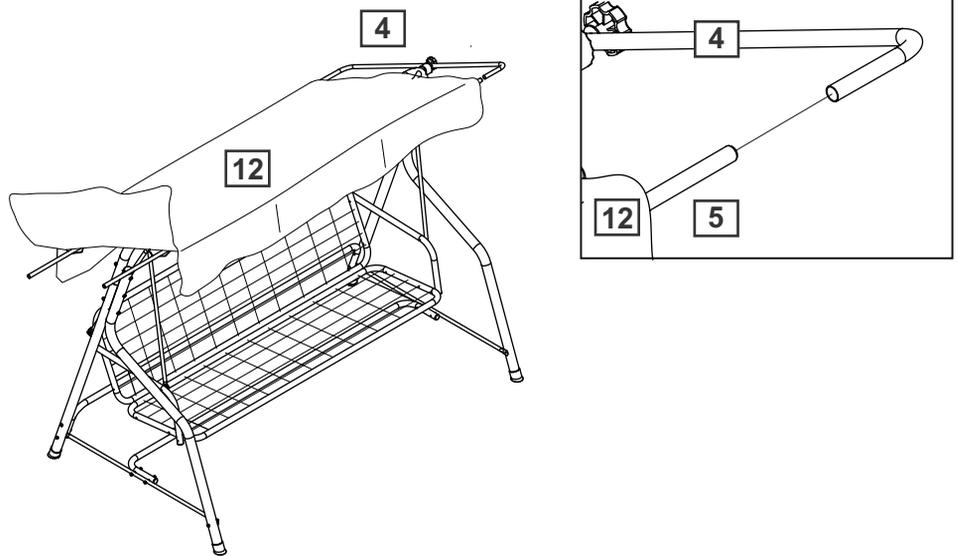

Step 28

Insert the roof poles **5** into the other roof bar **4**

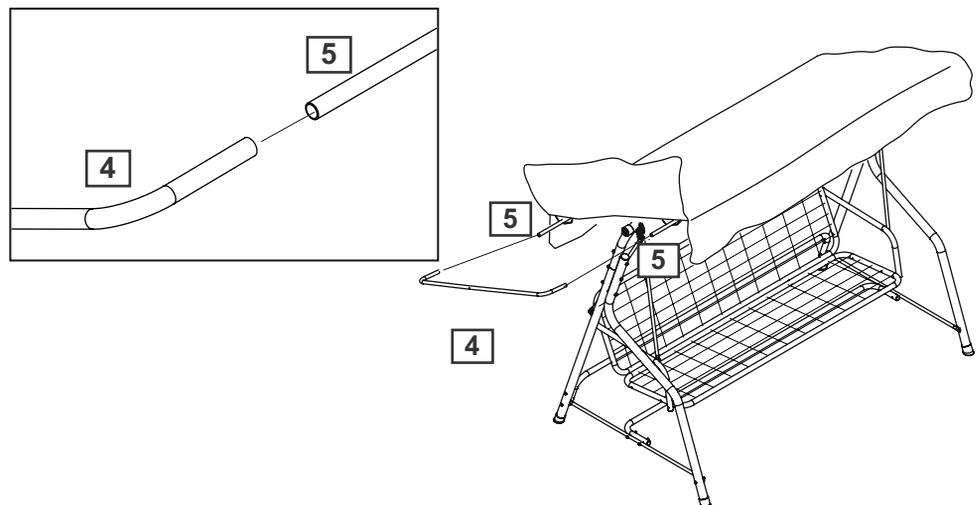

Step 29

Fix the other roof bar **4** to the pin **G** using the washer **M** and the wheel **U**

Tighten completely all bolts.

Assembly is complete.

