## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Outer

dimensions

Height

Width

Supplier's name or trade mark: PHILIPS

Supplier's address: Customer Care Philips, I.B.R.S./C.C.R.I. /Numéro 10461, 5600VB Eindhoven, NL

Model identifier: 9290023349 Type of light

Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	E27		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	Yes

Colour-tuneable light source: Envelope: No High luminance light source: No Anti-glare shield: Dimmable: No Only with

	_			specific dimmers			
		Product parameters					
	Parameter	Value	Parameter	Value			
		General product p	arameters:				
	Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	16	Energy efficiency class	F			
	Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 600 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700			
	On-mode power (P <sub>on</sub> ), expressed in W	15,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the second decimal	0,00			
	Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80			

131

67

Spectral

distribution in the

power

Page 1 / 3

See image


in last page

without separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)	Depth	67	range 250 nm to 800 nm, at full-load				
Claim of equivalent power <sup>(a)</sup>		Yes	If yes, equivalent power (W)	100			
			Chromaticity coordinates (x and y)	0,458			
Parameters for LED and OLED light sources:							
R9 colour rende	ring index value	0	Survival factor	0,90			
the lumen maint	tenance factor	0,96					
Parameters for I	ED and OLED ma	ains light sources	:				
displacement fac	ctor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6			
Claims that a source replaces light source with ballast of a parti	nout integrated	_(b)	If yes then replacement claim (W)	-			
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,0			

0.0369

0.0300

(a)<sub>'-'</sub> : not applicable; (b)<sub>'-'</sub> : not applicable;

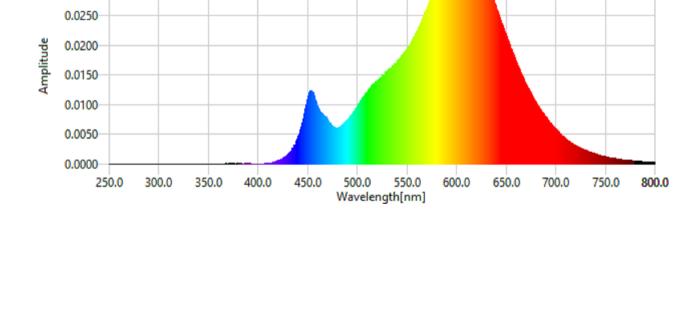

Page 2 / 3

Page 3 / 3