Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

Supplier's name or trade mark: PHILIPS

Supplier's address: Customer Care Philips, I.B.R.S./C.C.R.I. /Numéro 10461, 5600VB Eindhoven, NL

Model identifier: 9290024715

Type	of	light	source:

Type of inglife source.			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	B22		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

			Product parar	neters	
Pa	arameter		Value	Parameter	Value
			General product p	arameters:	
m	nergy consun node (kWh/10 p to the neares	00 h), rounded	14	Energy efficiency class	F
in in	ndicating if it ro n a sphere (36	is flux (φuse), efers to the flux 60º), in a wide n a narrow cone	1 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	20006500
	n-mode p xpressed in W	ower (P _{on}),	13,5	Standby power (P _{sb}), expressed in W and rounded to the second decimal	0,00
fc	Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
0	uter	Height	130	Spectral power	See image
di	imensions	Width	67	distribution in the	in last page


Page 1 / 3

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	67	range 250 nm to 800 nm, at full-load	
Claim of equivalent powe	r ^(a) Yes	If yes, equivalent power (W)	75
		Chromaticity coordinates (x and y)	0,458
Parameters for LED and 0	OLED light sources:		
R9 colour rendering index	k value 0	Survival factor	0,90
the lumen maintenance f	actor 0,96		
Parameters for LED and (OLED mains light source	s:	
displacement factor (cos	ф1) 0,70	Colour consistency in McAdam ellipses	6
Claims that an LED source replaces a fluor light source without inte ballast of a particular wat	grated	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(b)_{'-'} : not applicable;

0.0272 0.0240 0.0220-

Page 2 / 3

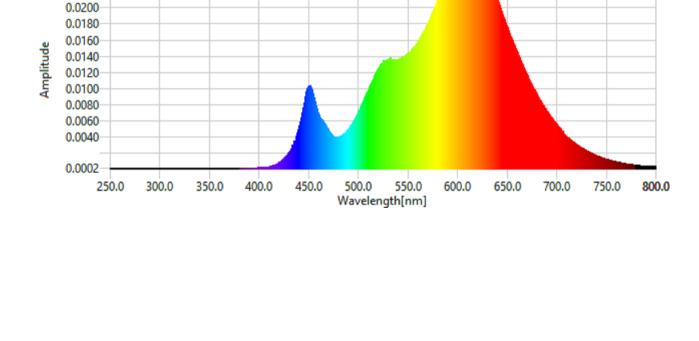

Page 3 / 3