


Mia Workdesk

Assembly Instructions - Please keep for future reference

White 2261490

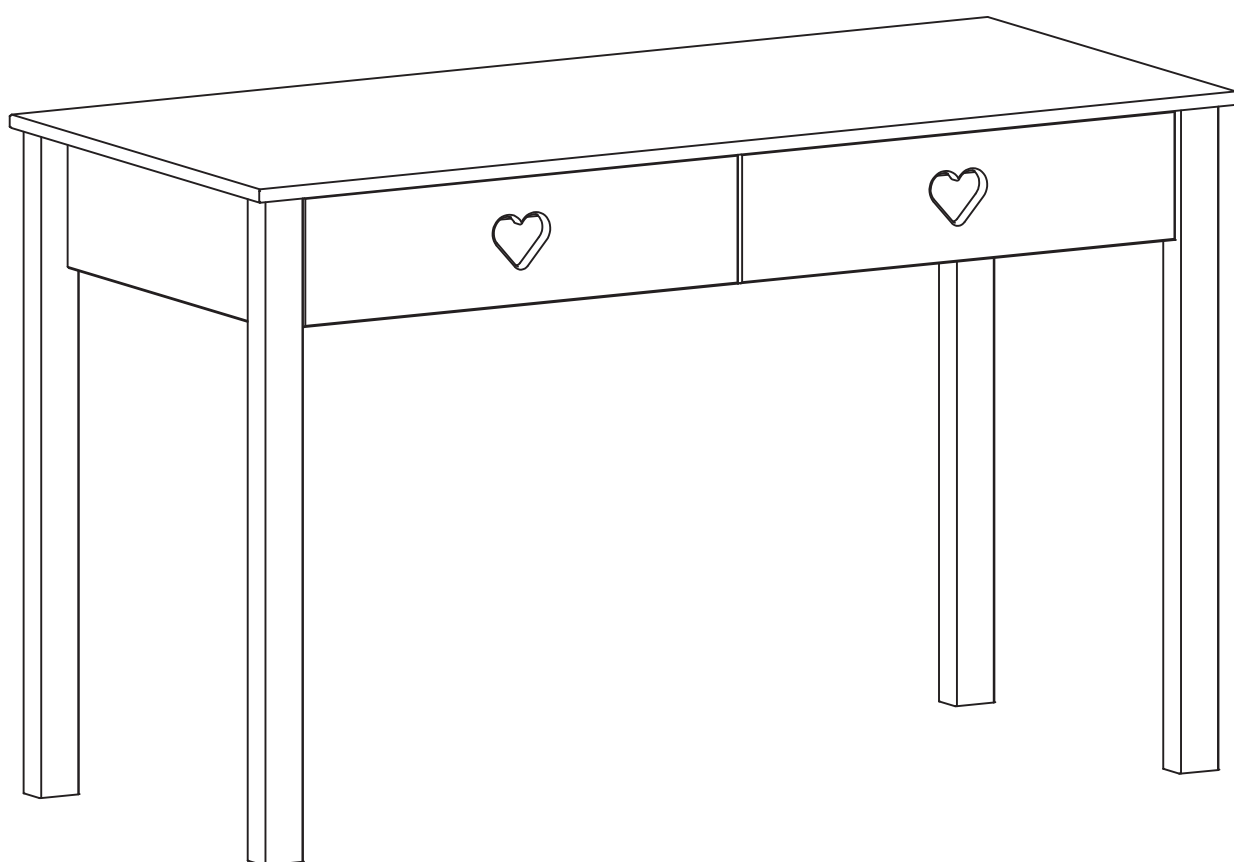

Dimensions

Width : 124.5 cm

Depth : 55.0 cm

Height: 76.0 cm

Assembly Instructions - Please keep for future reference

If you need help or have damaged or missing parts, call the **Argos Customer Helpline: 0845 640 30 30**

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Argos Customer Helpline: 0845 640 30 30**


Please check you have all the panels listed below

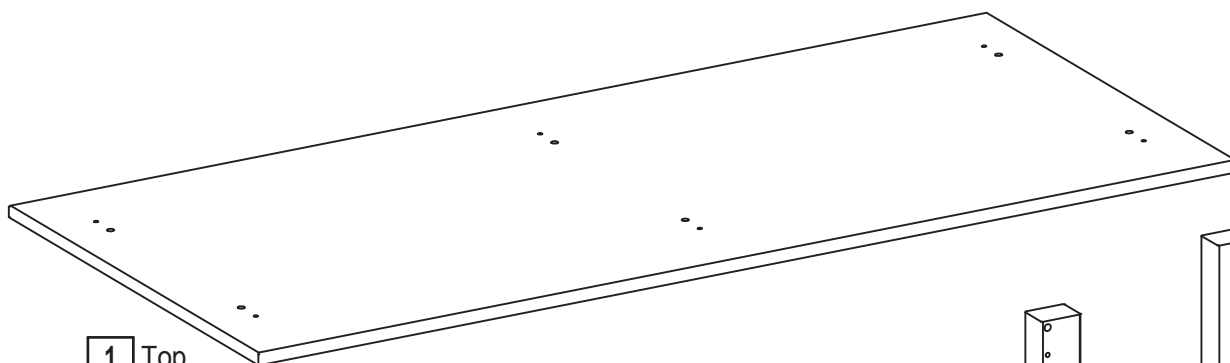


1 Top
(124,5 cm x 55 cm)

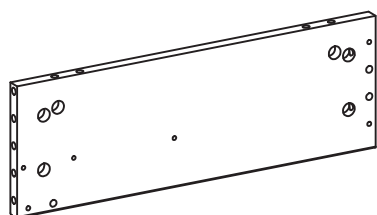


2 Side, left
(15,5 cm x 45,6 cm)

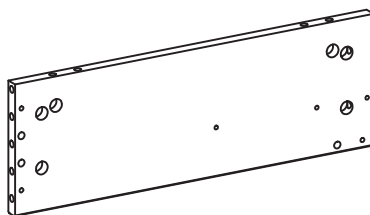


3 Side, right
(15,5 cm x 45,6 cm)

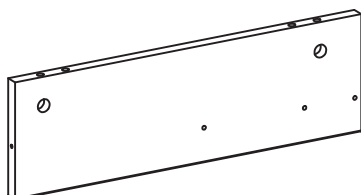


6 Divider
(13,8 cm x 44,1 cm)

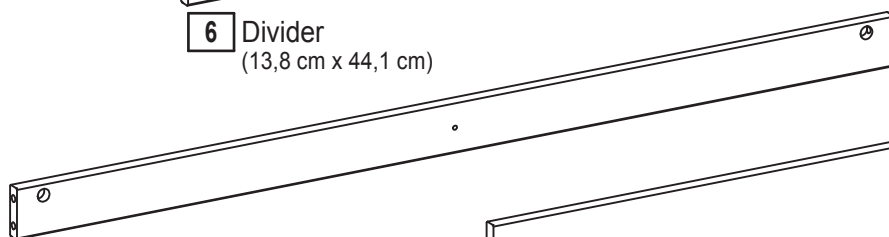


7 Front rail
(111,5 cm x 6 cm)

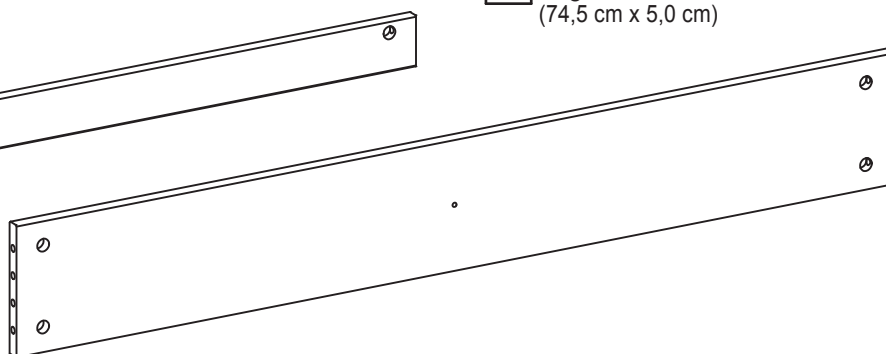


8 Back rail
(111,5 cm x 15,5 cm)

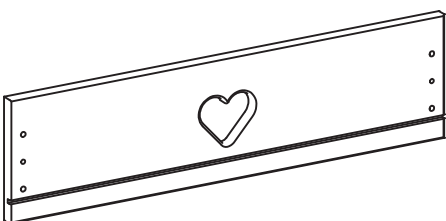


9 Drawer front x 2
(55,3 cm x 14,5 cm)




10 Drawer side, right/left x 4
(35 cm x 9,8 cm)

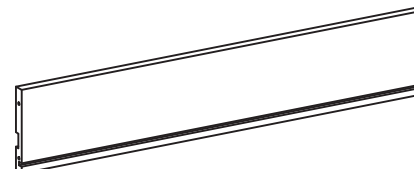

11 Drawer back x 2
(50,8 cm x 9,8 cm)

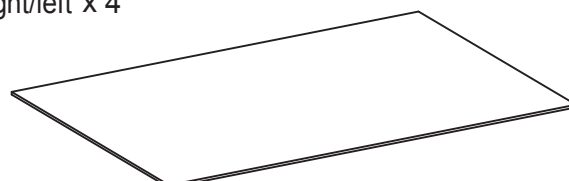

12 Drawer bottom x 2
(51,8 cm x 34,7 cm)

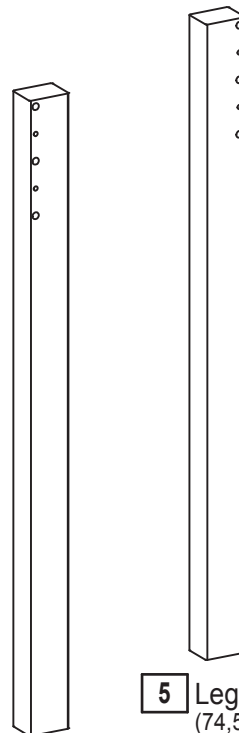













4 Leg, left x 2
(74,5 cm x 5,0 cm)

5 Leg, right x 2
(74,5 cm x 5,0 cm)

Components - Fittings

Please check you have all the panels listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Aa  ø8 x 40mm Wooden dowel x 24	Ab  ø6 x 30mm Wooden dowel x 8	Bp  ø3 x 35mm Screw x 8
Ca  ø15 x 10.5mm Cam x 24	Cp  ø5 x 11, cc34mm Bolt x 24	Dj  ø5 x 38mm Screw x 2
Fh  Wall strap and instruction x 1	Fi  Back fitting w. ø3.5 x 15mm Screw x 4	Hk  M4 x 9mm Screw x 4
Nu  ø10 x 9mm Spacer x 6	Sk  245 x 17 x 10mm Drawer runner x 4	Kf  ø5.8 x 19mm Screw x6


Tools required



Phillips screwdriver
(Medium & large)




Hammer



Flatblade screwdriver
(Medium)


Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions


Step 1

Assembly of the desk.

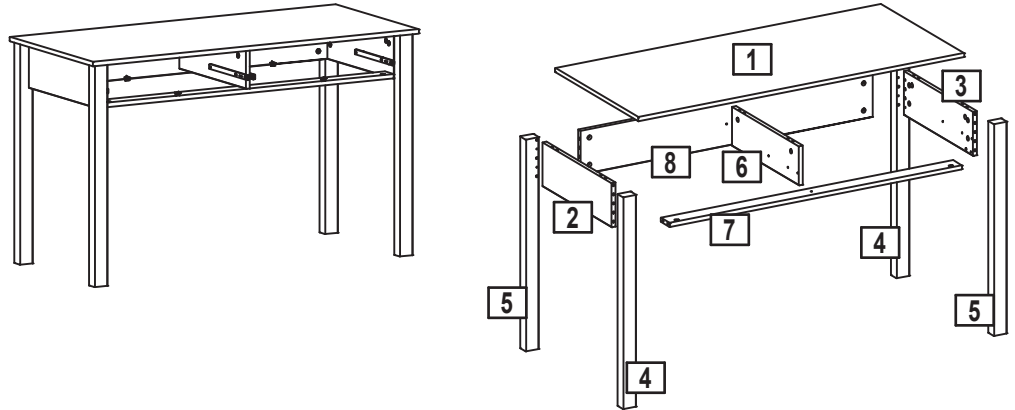

Step 1.1

Knock the dowels **Aa** into the holes indicated on the sides **2** and **3** using a small hammer.

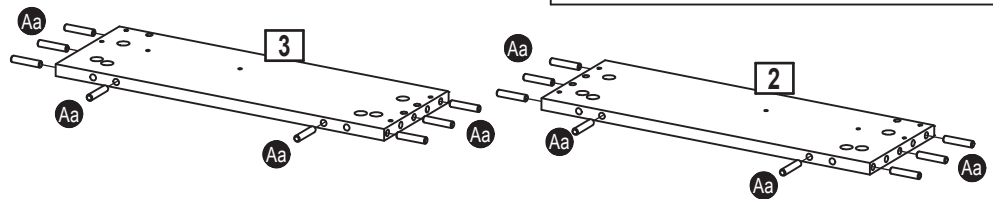


Aa



ø8 x 40mm Wooden dowel x 16

Step 1.2

Screw the bolts **Cp** into the holes indicated on the legs **4** and **5**.

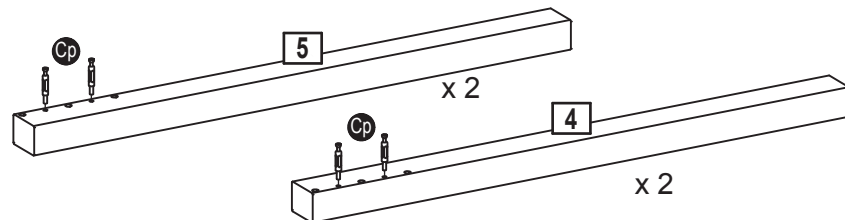

Cp




ø5 x 11, cc34mm Bolt x 8

Step 1.3

Place the legs **4** and **5** onto the sides **2** and **3**.

Push cams **Ca** into the holes indicated on the sides **2** and **3**. Arrows pointing towards the legs **4/5**.

Turn the cams **Ca** to the right to fix the legs **4** and **5**.

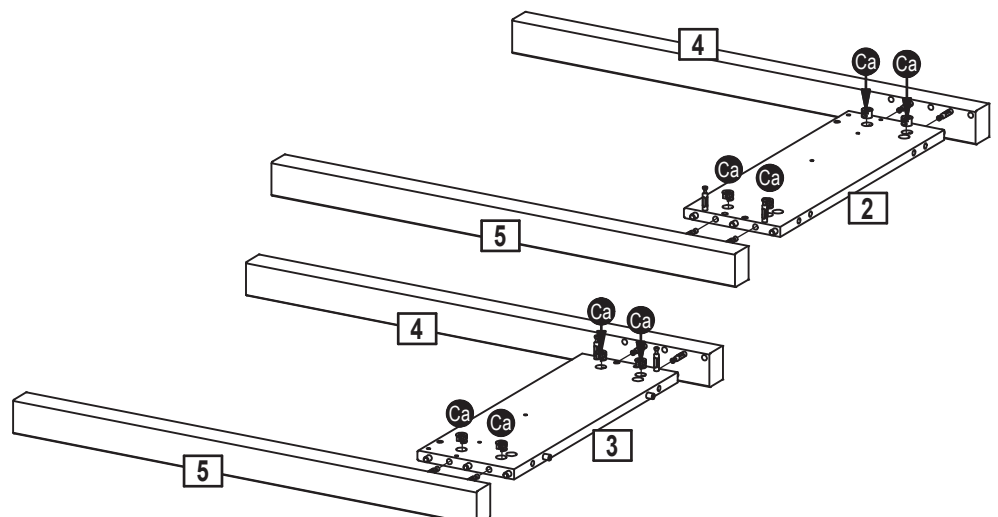

Ca




ø15 x 10.5mm Cam x 8

Assembly Instructions

Step 1.4

Screw the bolts **Cp** into the holes indicated on the sides **2** and **3**.

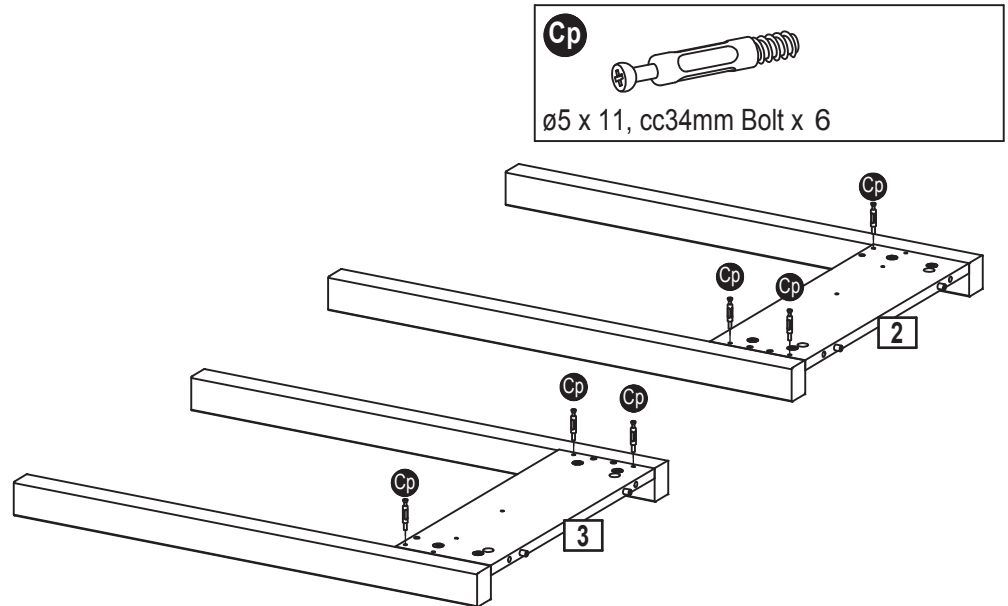


Step 1.5

Slide the top of the drawer runners **Sk** backwards. You can identify the front end of the drawer runner **Sk** by the two M4 holes. See details.

Place the Spacers **Nu** as shown, and fix the front end of the drawer runners **Sk** to the sides **2** and **3** using screws **Kf** through the holes number 2 and 8 as indicated.

See details.

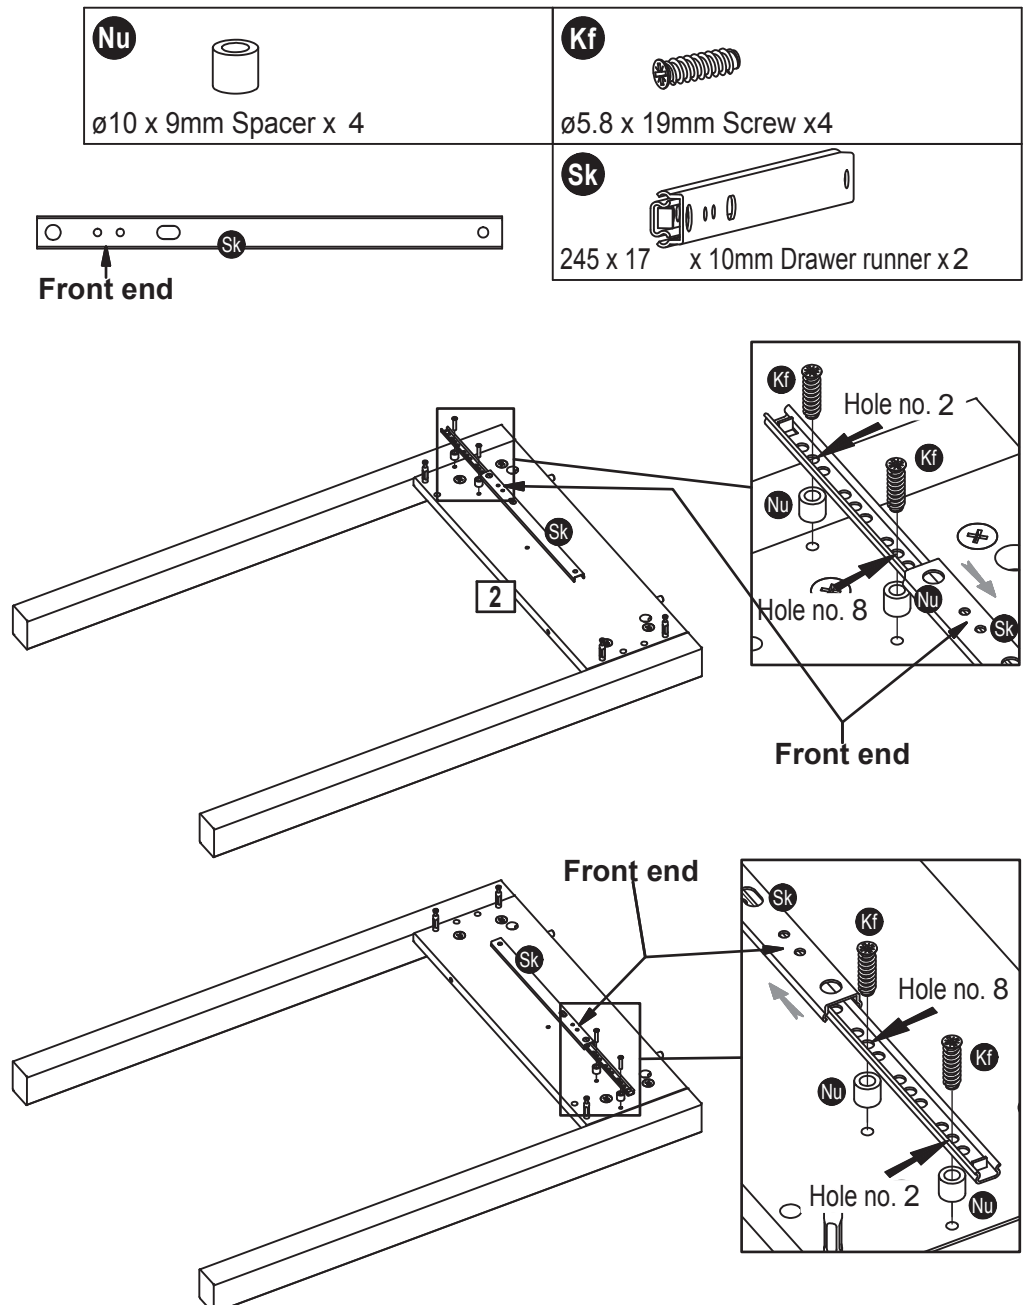

Assembly Instructions

Step 1.6

Slide the top of the drawer runners **Sk** forwards.

Place the Spacers **Nu** as shown, and fix the back end of the drawer runners **Sk** to the sides **2** and **3** using screws **Kf** through the holes indicated.

See details.

Kf




ø5.8 x 19mm Screw x2

Nu



ø10 x 9mm Spacer x 2

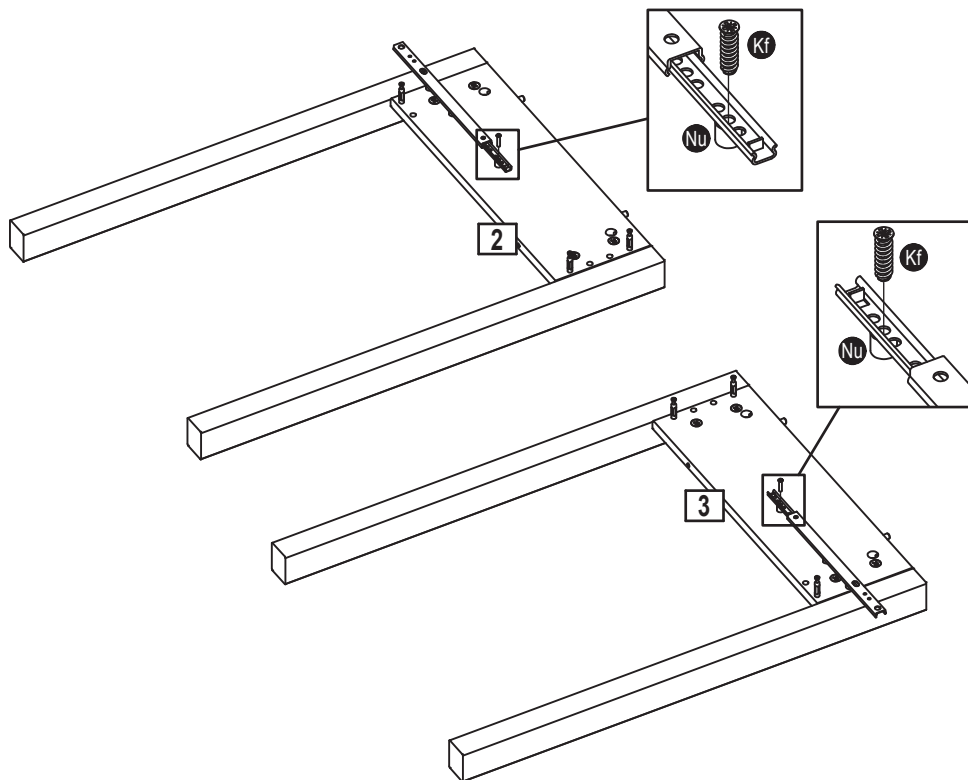


Step 1.7

Knock the dowels **Aa** into the holes indicated on the back rail **8**, the front rail **7** and the divider **6** using a small hammer.

Aa



ø8 x 40mm Wooden dowel x 8

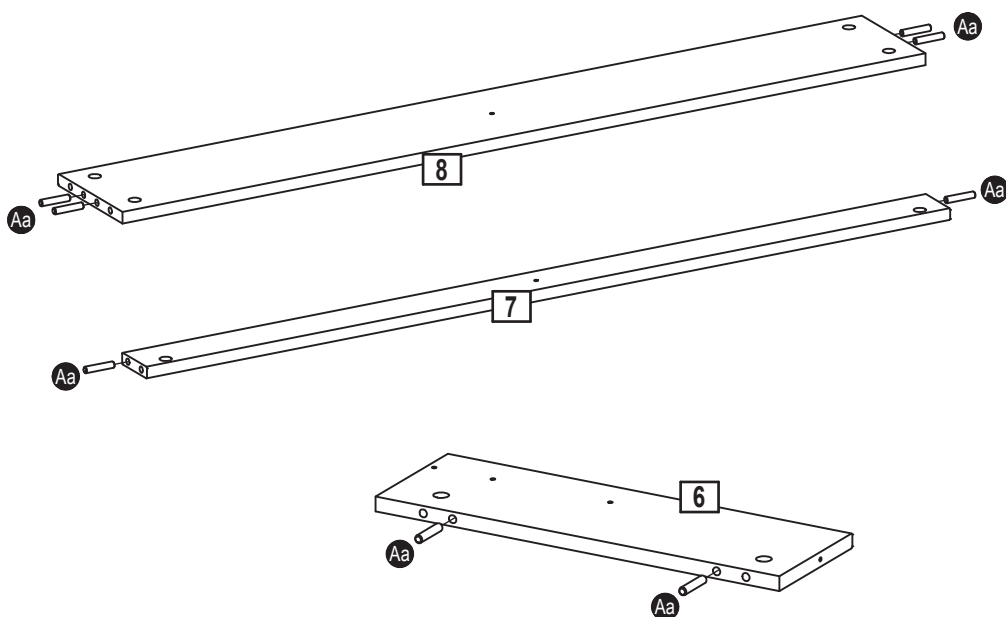


Assembly Instructions

Step 1.8

Slide the top of the drawer runner **Sk** backwards. Identify the front end of the drawer runner **Sk** by the two M4 holes.


Fix the front end of the drawer runner **Sk** to the divider **6** using screws **Kb** through the holes number 2 and 8 as indicated.

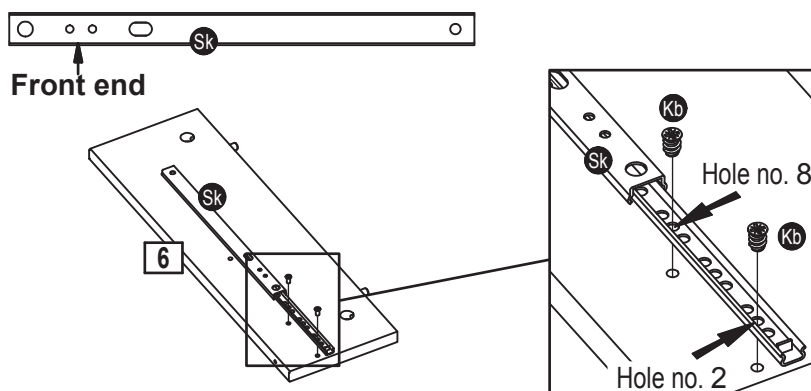

Step 1.9

Slide the top of the drawer runner **Sk** forwards.

Fix the back end of the drawer runner **Sk** to the divider **6** using screw **Kb** through the hole indicated.


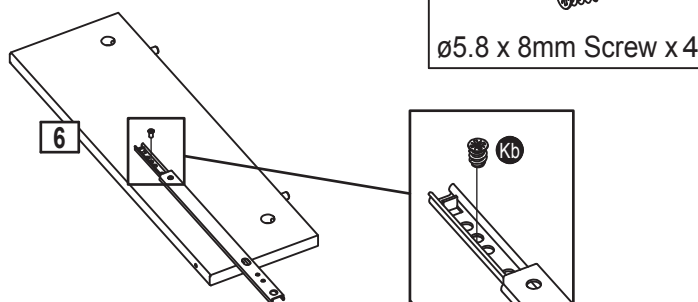


Step 1.10

Turn the divider **6** upside down.

Slide the top of the drawer runner **Sk** forwards.


Fix the front end of the drawer runner **Sk** to the divider **6** using screws **Kb** through the holes number 2 and 8 as indicated.

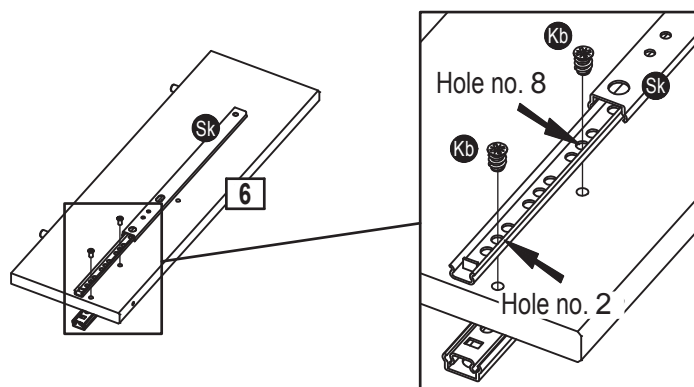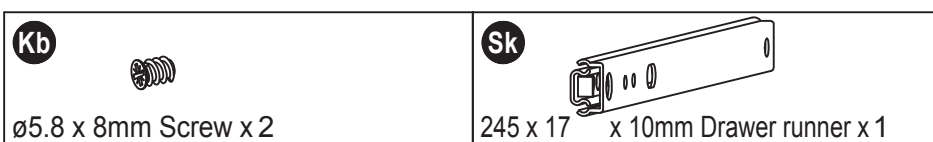

Step 1.11

Slide the top of the drawer runner **Sk** forwards.



Fix the back end of the drawer runner **Sk** to the divider **6** using screw **Kb** through the hole indicated.

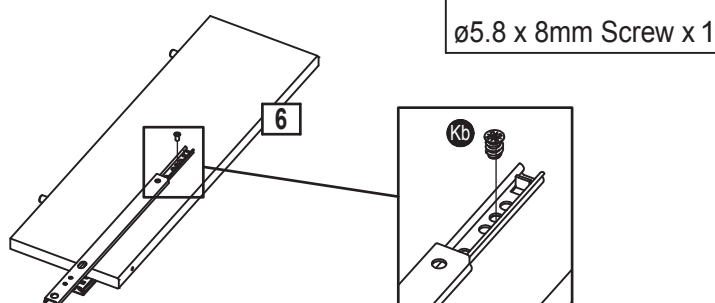

Assembly Instructions

Step 1.12

Screw the bolts **Cp** into the holes indicated on the top **1**.

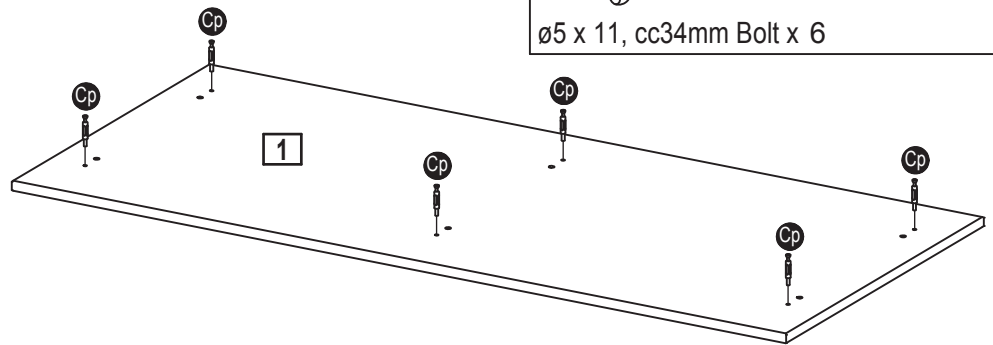



Step 1.13

Place the divider **6** onto the top **1**.

Push cams **Ca** into the holes indicated on the divider **6**. Arrows pointing towards the top **1**.

Turn the cams **Ca** to the right to fix the divider **6**.

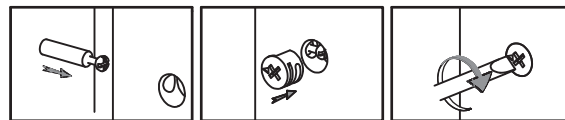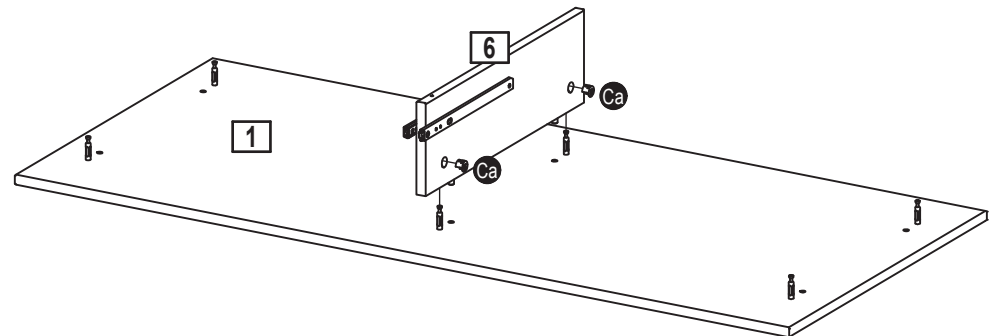


Step 1.14

Place the sides **2** and **3** onto the back rail **8** and the front rail **7**.

Push cams **Ca** into the holes indicated on the back rail **8** and the front rail **7**.

Arrows pointing towards the sides **2/3**.

Turn the cams **Ca** to the right to fix the sides **2** and **3**.

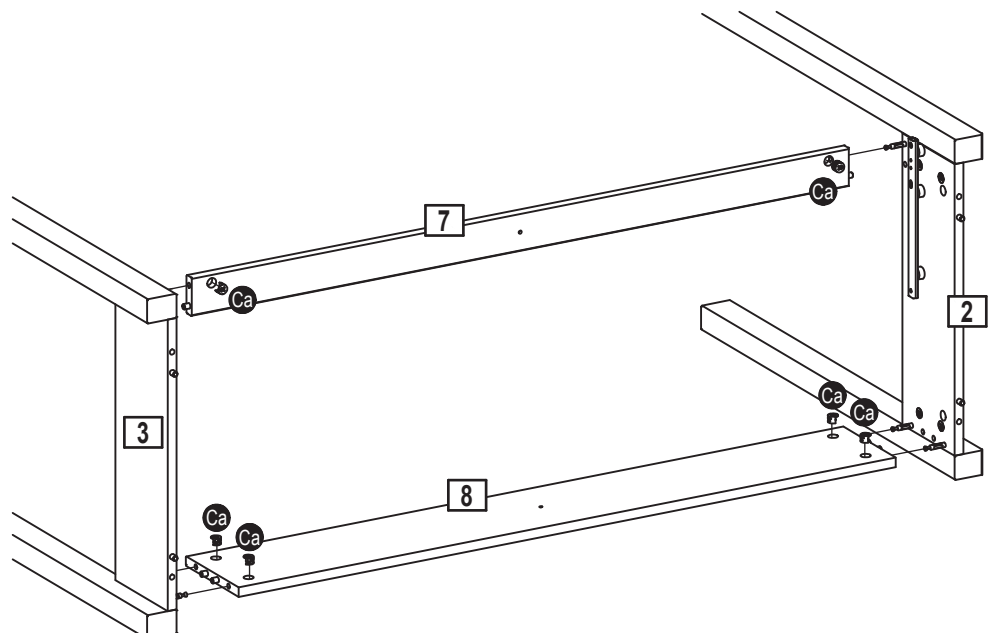

Assembly Instructions

Step 1.15

Place the sides **2** and **3** onto the top **1**.


Push cams **Ca** into the holes indicated on the sides **2** and **3**.
Arrows pointing towards the top **1**.

Turn the cams **Ca** to the right to fix the top **1**.

Ca



ø15 x 10.5mm Cam x 4

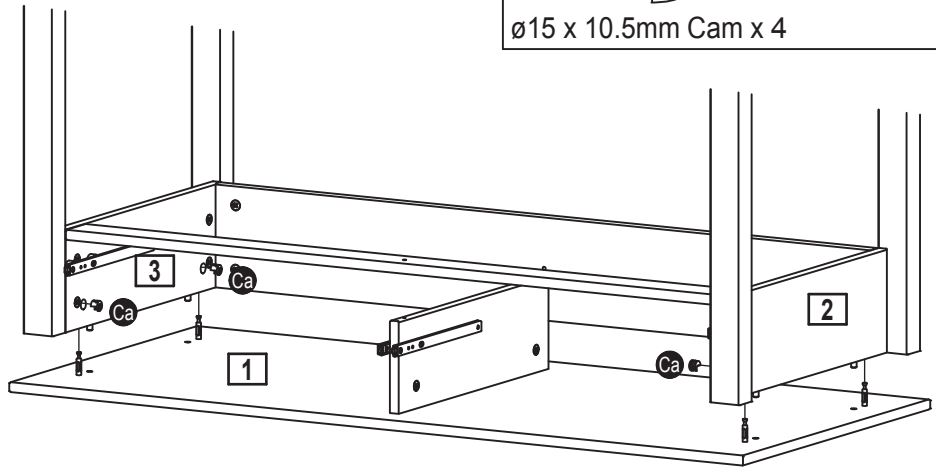


Step 1.16

Fix the back rail **8** and the front rail **7** to the divider **6** as shown, using screws **Dj**.

Dj



ø5 x 38mm Screw x 2

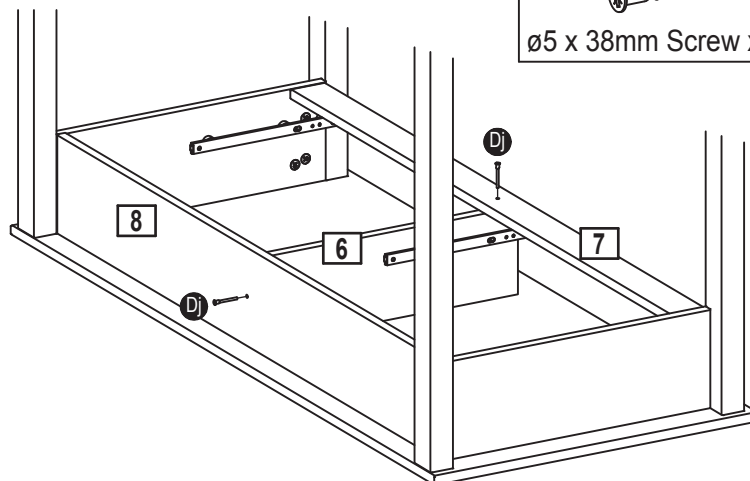

Step 1.17



Important!


The work desk is heavy.

Lift with care.


It's recommended that the work desk is fixed to the wall.

Use the fittings **Fh**. Follow the instructions included with the fittings.

Fh





Wall strap and instruction x 1

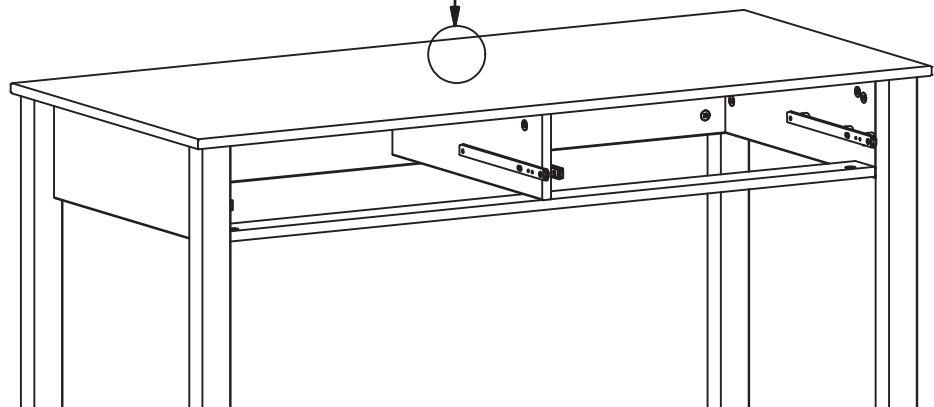

Assembly Instructions

Step 2

Assembly of the drawers.

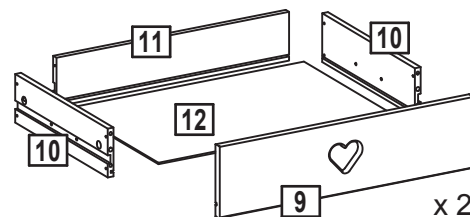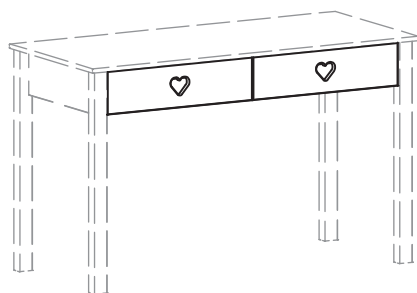


Step 2.1

Fix the drawer sides **10** to the drawer back **11** as shown, using screws **Bp**.

Bp



ø3 x 35mm Screw x 8

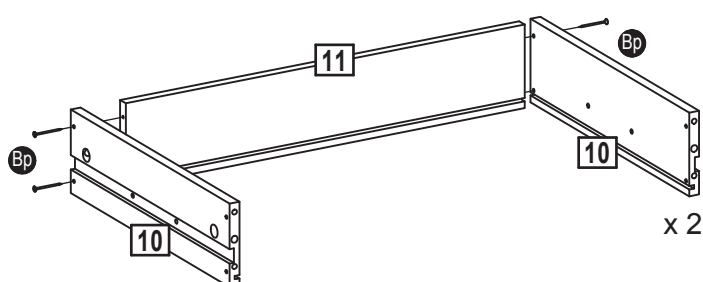


Step 2.2

Knock the dowels **Ab** into the holes indicated on the drawer sides **10** using a small hammer.

Ab




ø6 x 30mm Wooden dowel x 12

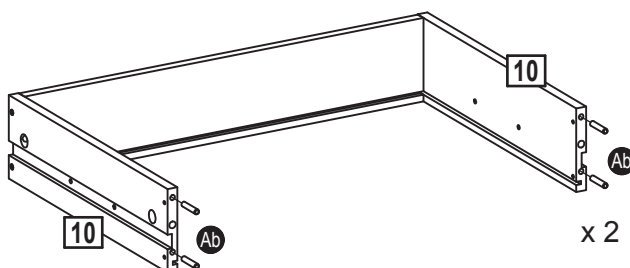

Step 2.3

Slide the drawer bottom **12** into the drawer sides **10**.

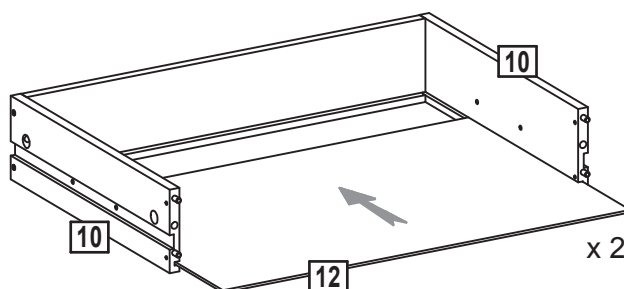


Step 2.4

Screw the bolts **Cp** into the holes indicated on the drawer front **9**.

Cp



ø5 x 11, cc34mm Bolt x 6

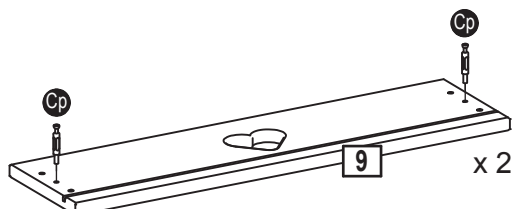


Assembly Instructions

Step 2.5

Push the drawer front **9** onto the drawer sides **10**.

Place cams **Ca** into the holes indicated. Arrow pointing towards the front. Turn the cams **Ca** to the right to fix the front.

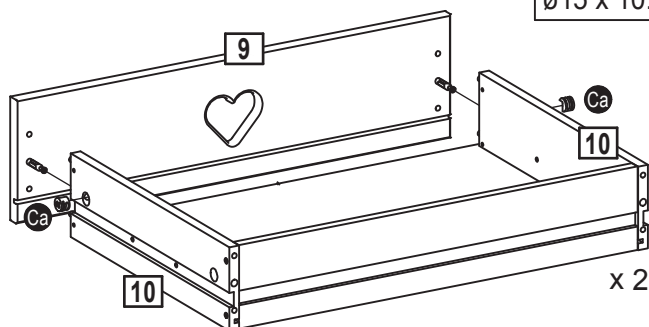

Ca



ø15 x 10.5mm Cam x 4


Step 2.6



Important!

Make sure the angle between the drawer front **9** and the drawer sides **10** is 90° before the drawer bottom **12** is fixed using **Fi** as shown.





To adjust the angle between the sides and the front push the fitting **Fi** sideways.

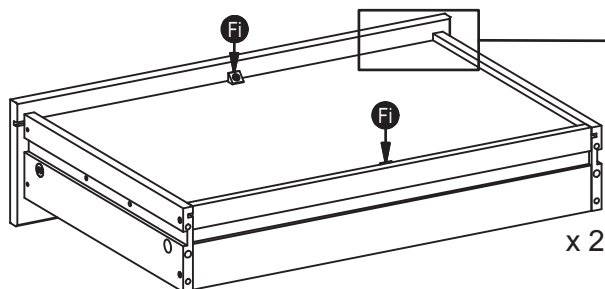

Fi




Back fitting w. ø3.5 x 15mm Screw x 4



Step 2.7

Pull out the drawer runners. Slide the drawers onto the runners.

Fix drawers to the drawer runners using screws **Hk**.

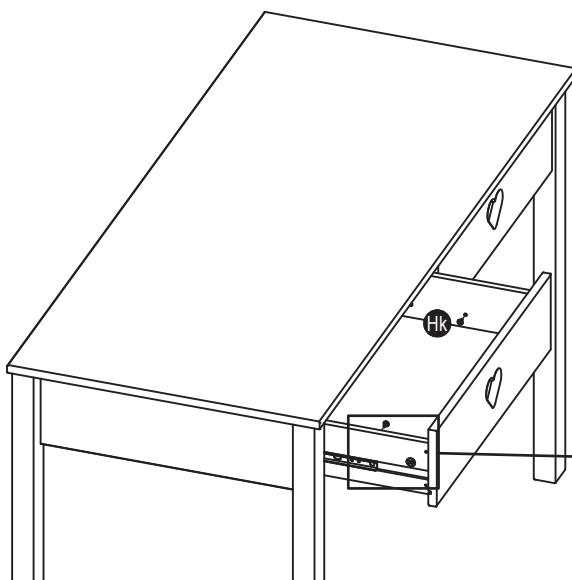

Hk



M4 x 9mm Screw x 4

