


# Winchester - Tall Display Unit

Assembly Instructions - Please keep for future reference

413/9348

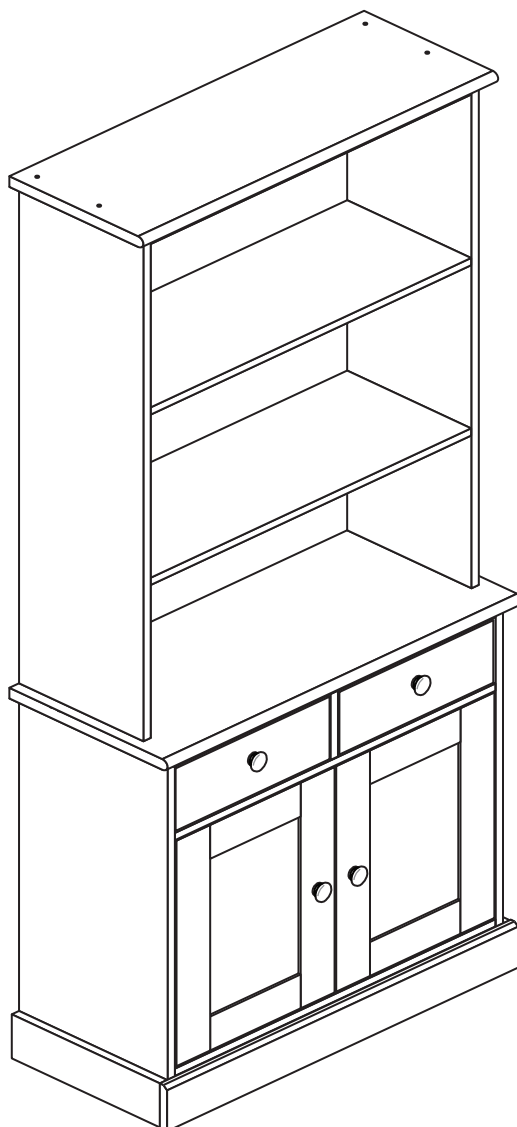

## Dimensions

Width - 73.3cm

Depth - 32.7cm

Height - 182.5cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)

Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020



# Safety and Care Advice

**Important - Please read these instructions fully before starting assembly**

• **Warning:** This unit weighs approximately 38kgs. Please lift with care.

• Check you have all the components and tools listed on pages 1, 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Parts of the assembly will be easier with 2 people.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

• **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.

• Dispose of all packaging carefully and responsibly.

## Care and maintenance

• Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.


• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

## Tools required


Scissors / Rule / Hammer / Cross-head screwdriver / Square / Spirit level

Eye protection (when using a hammer or drill) / Electric drill (only use when drilling into walls)


**Please check you have all the panels listed below**




**1** Drawer Front (DF3368)  
(31.8 x 12.9cm) x 2



**4** Drawer Back (W291-95)  
(29.1 x 9.5cm) x 2




**6** Rail (DF2834)  
(66.3 x 8.8cm) x 5




**2** Left Drawer Side (W280-95LH)  
(28 x 9.5cm) x 2



**5** Drawer Base (T302-277)  
(30.2 x 27.7cm) x 2



**7** Front Plinth (DF2837)  
(72.5 x 9.2cm)



**3** Right Drawer Side (W280-95RH)  
(28 x 9.5cm) x 2



**8** Side Plinth (DF2838)  
(30.7 x 9.1cm) x 2

# Components - Panels

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)


Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020

Please check you have all the panels listed below



**9** Top Left Side (DF3366)  
(103.5 x 25.7cm)

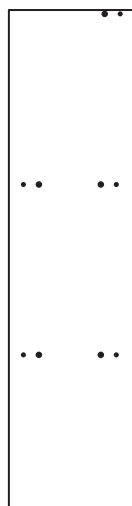


**10** Top Right Side (DF3367)  
(103.5 x 25.7cm)




**11** Top (DF3369)  
(73.3 X 27.7cm)



**12** Shelf (DF3370)  
(66.3 x 25.6cm) x 2

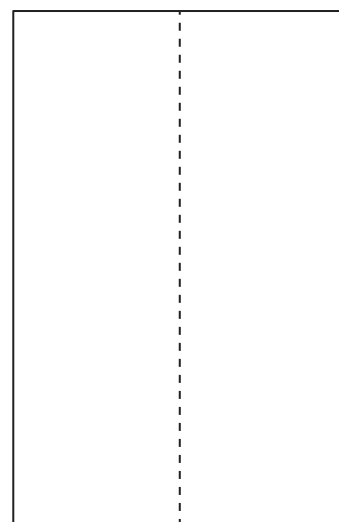

**13** Large Back (X1066-688)  
(106.6 x 68.8cm)

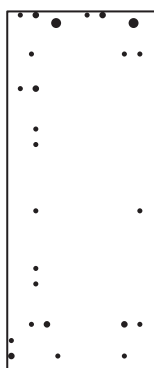

**14** Left Side (DF3363)  
(74.6 x 30.7cm)



**15** Right Side (DF3364)  
(74.6 x 30.7cm)



**16** Split Top (DF3365)  
(73.3 X 32.7cm)




**17** Divider (DF3371)  
(13.7 x 30.5cm)




**18** Base (DF2835)  
(66.3 x 30.6cm)



**19** Loose Shelf (DF3362)  
(66.3 x 28.1cm)



**20** Door (DF3280)  
(46.6 x 32.7cm) x 2



**21** Small Back (X663-688)  
(66.3 x 68.8cm)



# Components - Fittings





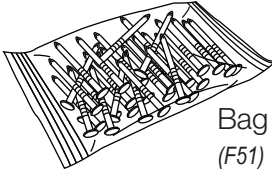














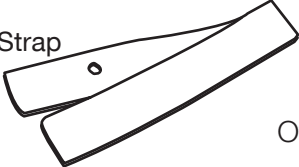


If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)

Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020

Please check you have all the fittings listed below

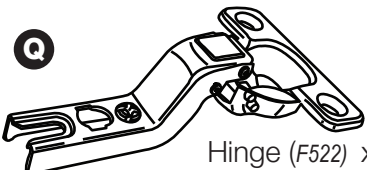**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Metal dowel (F901) x 35	<b>B</b>  Large locking nut (F900) x 31	<b>C</b>  Small locking nut (F3) x 4
<b>D</b>  Wooden dowel (F22) x 39	<b>E</b>  Bag of Nails (F51) x 2	<b>F</b>  40mm Screw (F910) x 8
<b>G</b>  38mm Screw (F81) x 4	<b>H</b>  25mm Screw (F50) x 4	<b>I</b>  9mm Screw (F74) x 4
<b>J</b>  9mm Screw (F73) x 8	<b>K</b>  13mm Screw (F63) x 8	<b>L</b>  Plastic Nail (F91) x 4
<b>M</b>  Drawer runner (F1004) x 4		<b>N</b>  Wedgefix (F639) x 4
<b>O</b>  Knock-in Peg (F171GY) x 8	<b>P</b>  Hinge plate (F523) x 4	<b>Q</b>  Hinge (F522) x 4
<b>R</b>  Shelf stud (F110) x 4	<b>S</b>  Handle (F463) x 4	
<b>T</b>   Screw  Washer x 2 Overbalance protector kit (F269) x 1		

Ruler - Use this ruler to help correctly identify the screws




# Assembly Instructions

## Step 1

### Prepare the 2 drawer fronts

Screw 2 metal dowels **A** into each of the drawer fronts **1**.

**Note:** Tighten the metal dowels up fully against the panels.

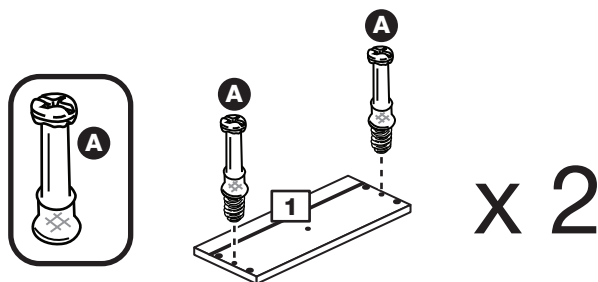


## Step 2

### Prepare the drawer sides

Insert a small locking nut **C** into the hole shown on the left drawer side **2** and the right drawer side **3**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

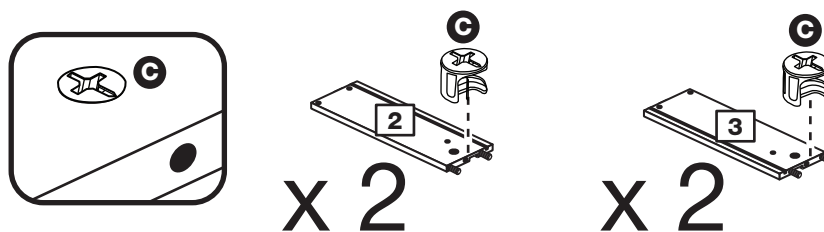


## Step 3

### Attach the drawer sides to the drawer fronts

Push the left drawer side **2** and right drawer side **3** onto the back of the drawer front **1**.

Turn the small locking nuts **C** on the left drawer side **2** and right drawer side **3**.

**Note:** Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

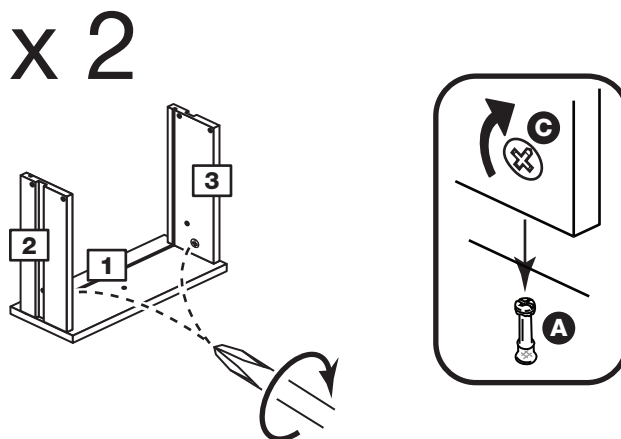


# Assembly Instructions

## Step 4

### Fit the drawer base

Slide the drawer base **5** down the grooves in the drawer sides **2** and **3** and down into the groove in the drawer front **1**.

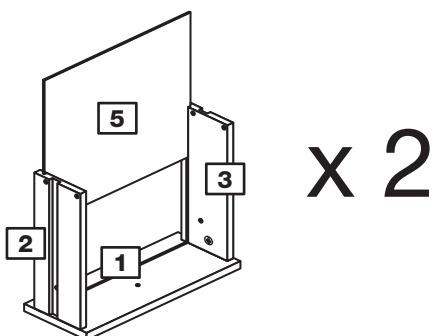


## Step 5

### Fit the drawer back

Fit the drawer back **4** between the drawer sides **2** and **3**. Make sure that the drawer base **5** fits into the groove in the drawer back **4**.

Hold the drawer back **4** in position and tap the knock-in pegs **0** through the holes in the drawer sides **2** and **3**.

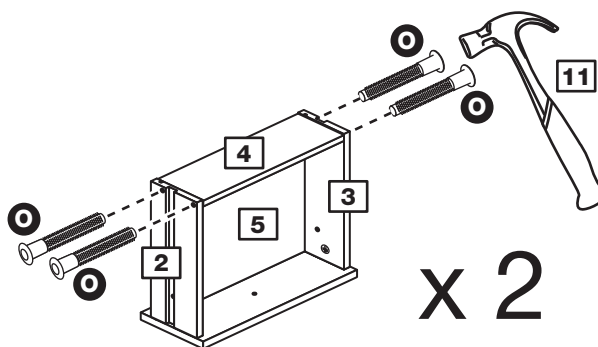


## Step 6

### Attach the handles

Attach a handle **S** to each of the drawer fronts **1** using screw **G**.


**Note: Do not overtighten the screw.**

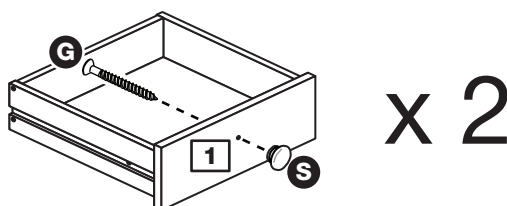

## Step 7

### Fit the wedgfixes

Turn the top drawer assembly over and slide 2 wedgfixes **n** into the front and back grooves, as shown, and tighten up the screws.

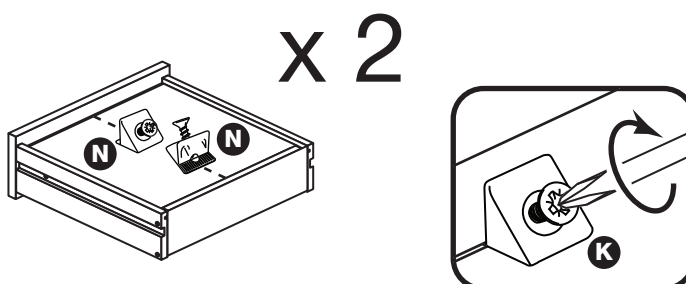

# Assembly Instructions


## Step 8

### Prepare top left side

Screw 5 metal dowels **A** into the top left side **9**.

Tap 4 wooden dowels **D** into the top left side **9**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

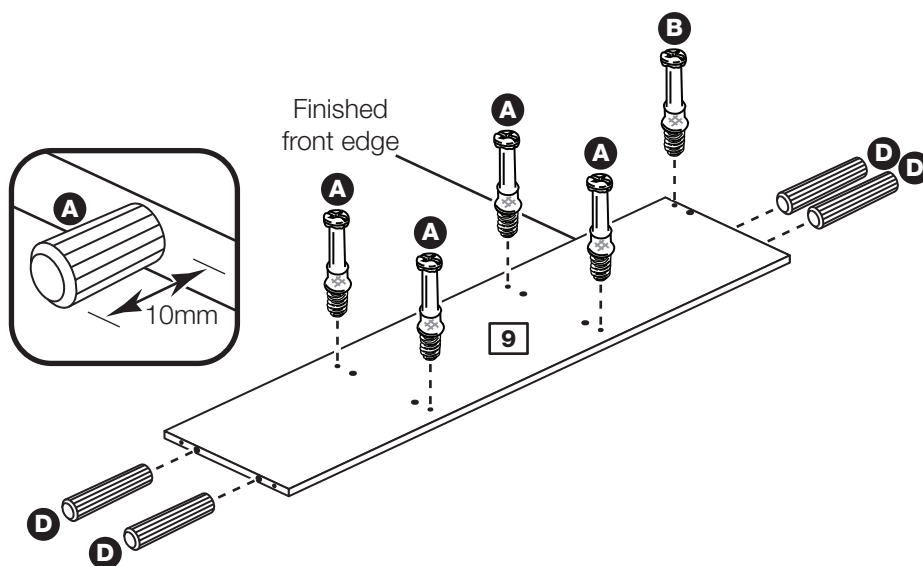


## Step 9

### Prepare top right side

Screw 5 metal dowels **A** into the top right side **10**.

Tap 4 wooden dowels **D** into the top right side **10**.

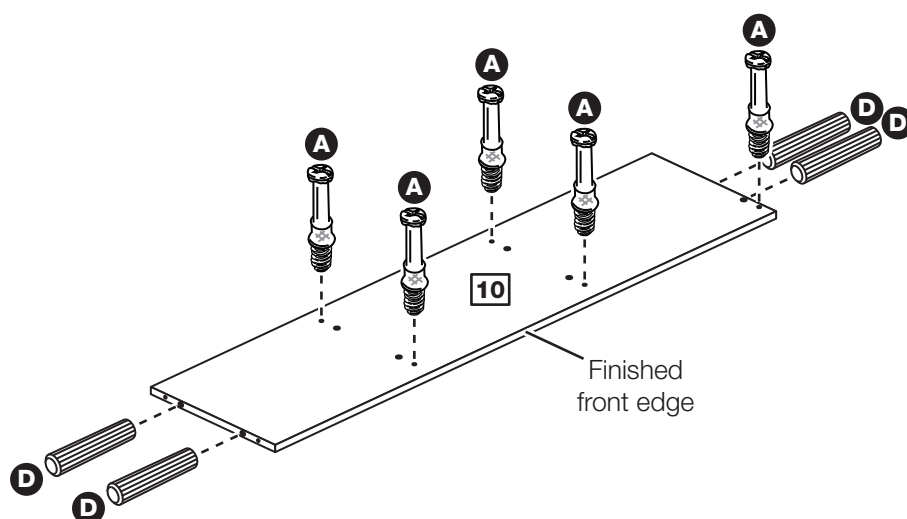


## Step 10

### Prepare the 2 shelves

Insert 4 large locking nuts **B** into the 2 shelves **12**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

Tap 4 wooden dowels **D** into the 2 shelves **12**.

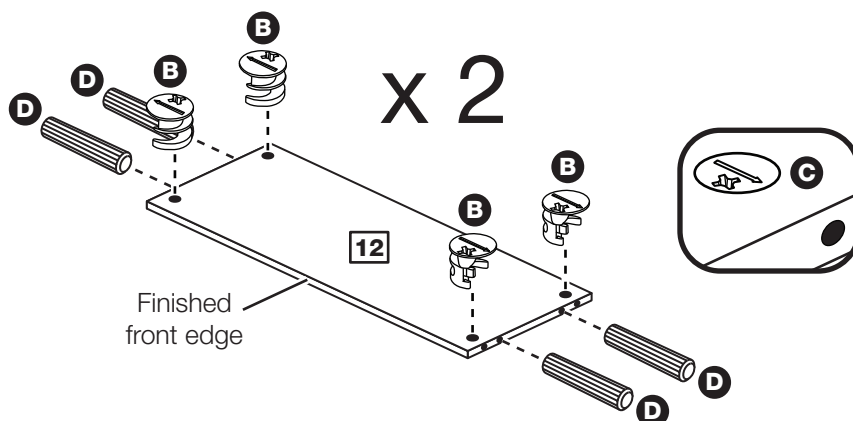

# Assembly Instructions


## Step 11

### Fit a shelf to the top right side

Push 1 of the shelves **12** onto the top right side **10**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the shelf **12**.

**Note:** Turn the large locking nuts **B** as far as they will go - more than 1/2 a turn.

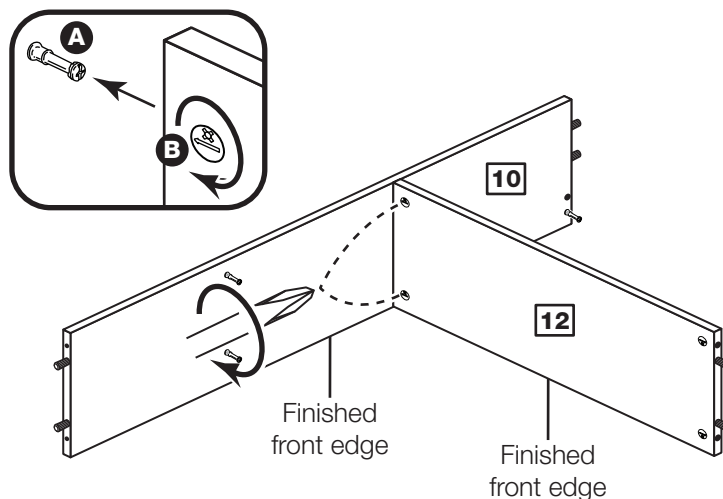


## Step 12

### Fit the other shelf

Push the shelf **12** onto the top right side **10**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the shelf **12**.

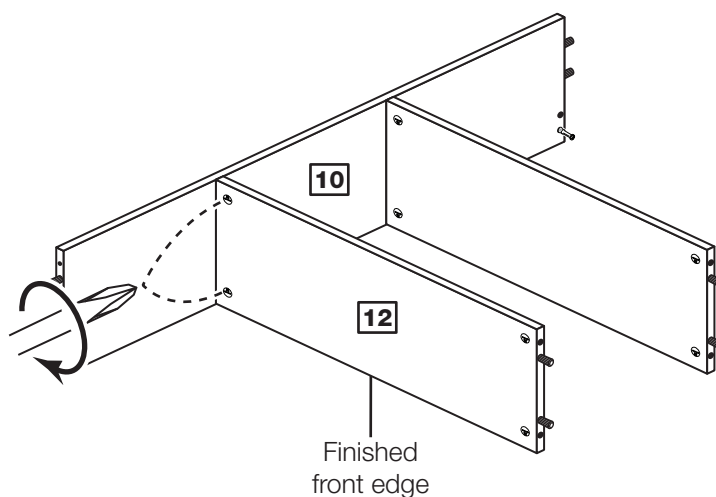


## Step 13

### Prepare 1 of the rails

Insert 2 large locking nuts **B** into 1 of the rails **6**.

Tap 2 wooden dowels **D** into 1 of the rails **6**.

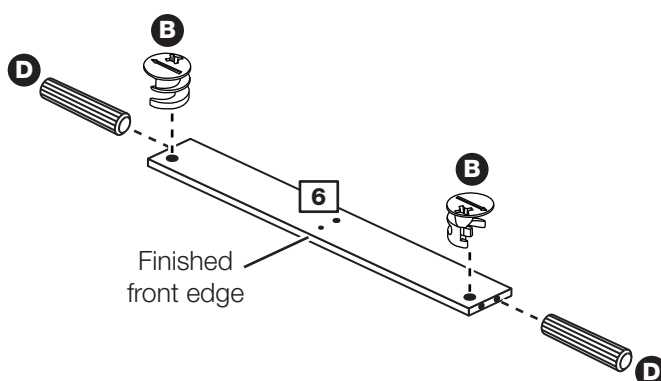




# Assembly Instructions

## Step 14

### Fit the rail

Push the rail **6** onto the top right side **10**.

Use a screwdriver to tighten the large locking nut **B** fitted to the rail **6**.

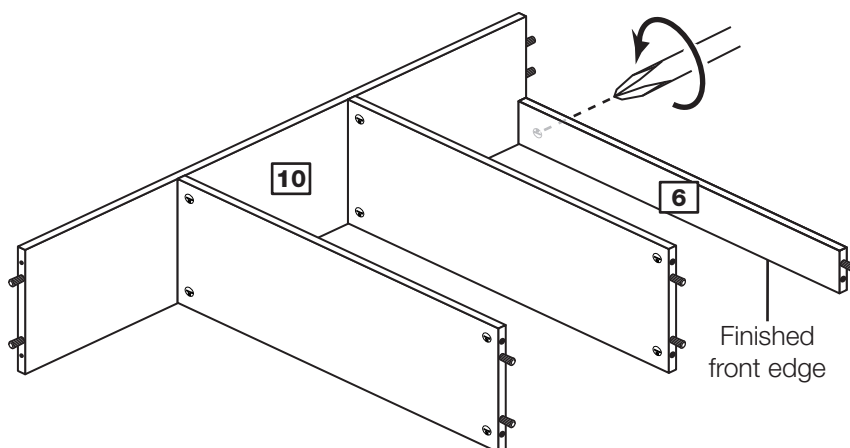


## Step 15

### Fit the top left side

Push the top left side **9** onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **B** fitted to the rail **6** and the 2 shelves **12**.

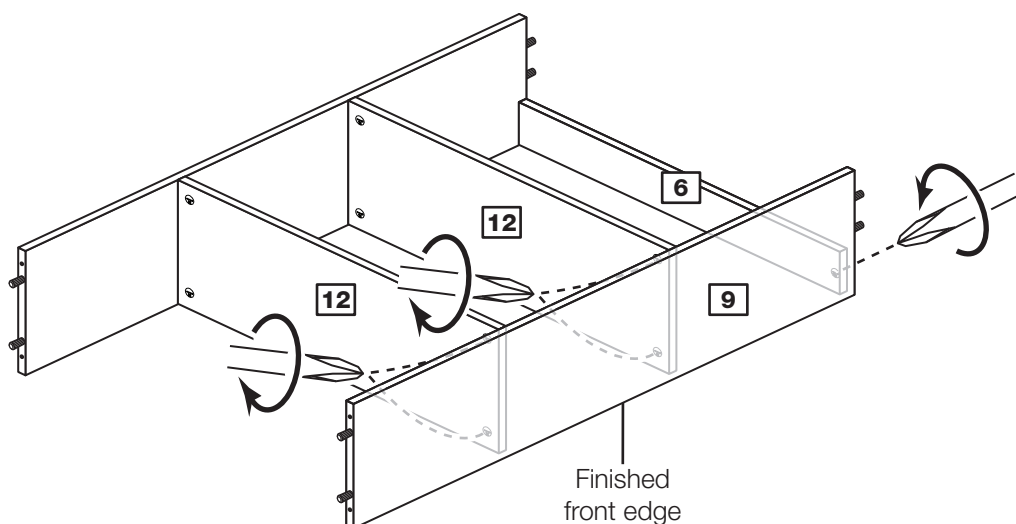


## Step 16

### Fit the top

**Note:** To make it easier to fit the rest of the panels, place polystyrene blocks from the packaging underneath the side panels to raise the assembly.

Push the top **11** onto the top left side **9** and top right side **10** and secure it with 4 screws **F**.

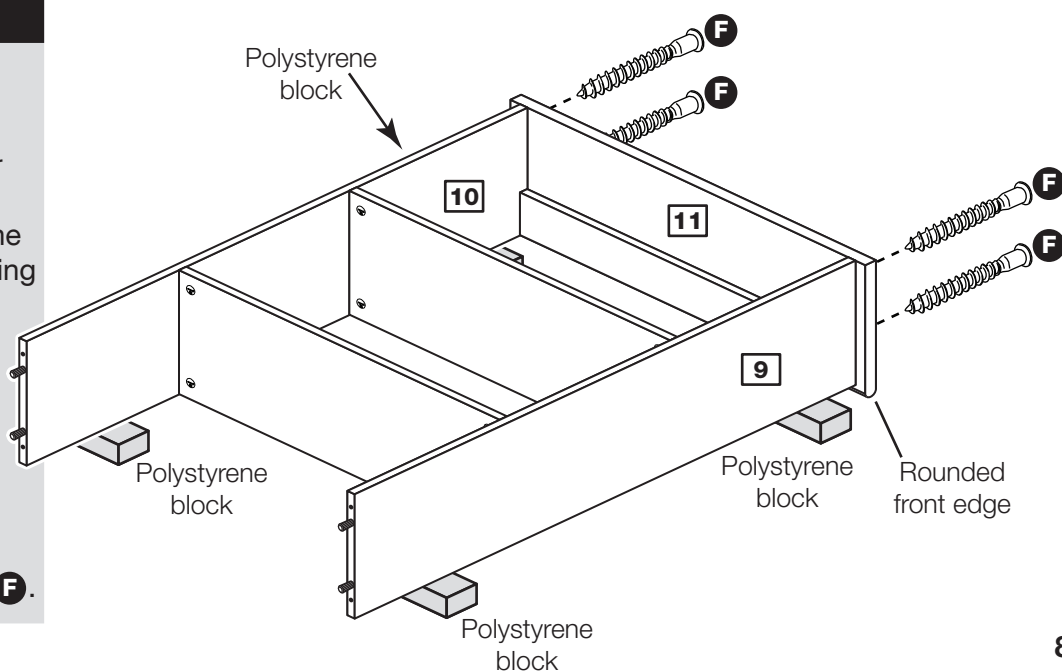


# Assembly Instructions

## Step 17

### Prepare the split top


Screw 4 metal dowels **A** into the split top **16**.

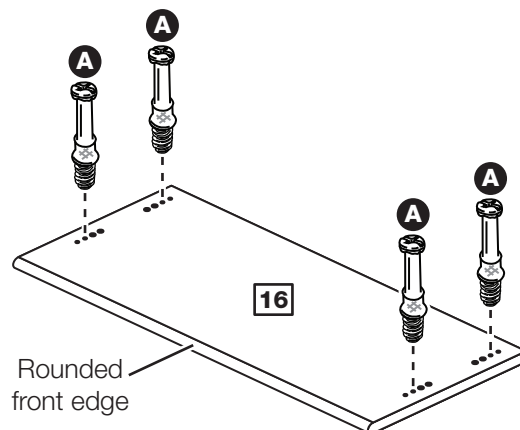

## Step 18

### Fit the split top

Push the split top **16** onto the top left side **9** and top right side **10** and secure it with 4 screws **F**.

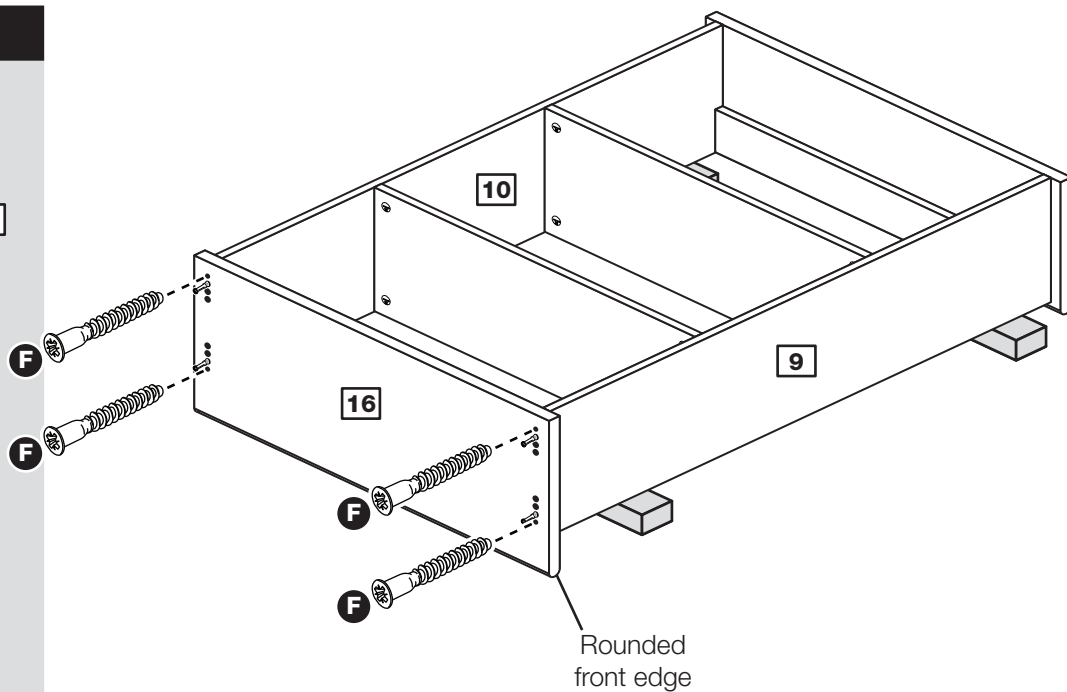



# Assembly Instructions

## Step 21

### Prepare the left side

**a:** Place a runner **M** on the left side **14** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.






**b:** Slide the runner **M** back the other way and fit the 2nd screw **J** into the corresponding hole in the left side **14**.

**c:** Screw 6 metal dowels **A** into the left side **14**.

**d:** Insert 2 large locking nuts **B** into the left side **14**.

Tap 2 wooden dowels **D** into the left side **14**.

Fit 2 hinge plates **P** onto the left side **14**, making sure that the slot is facing towards the finished front edge.

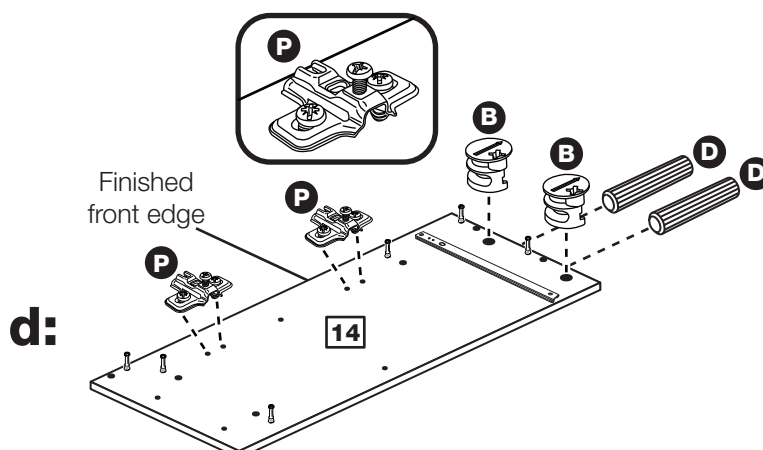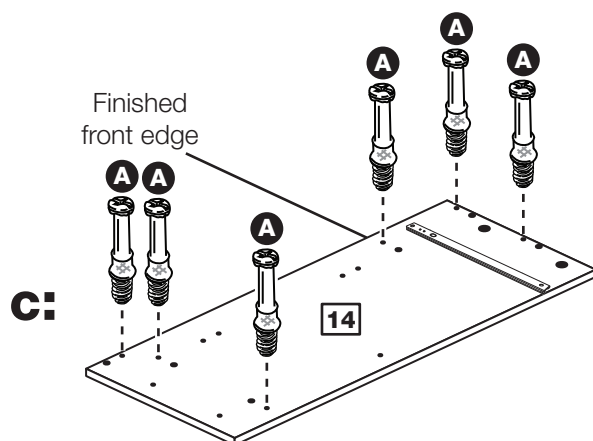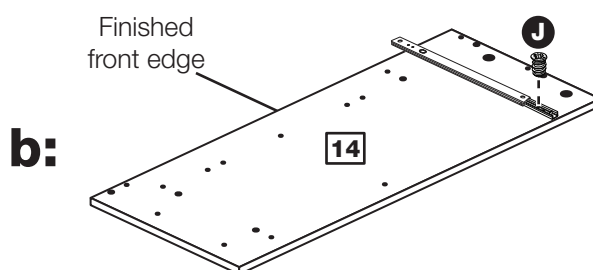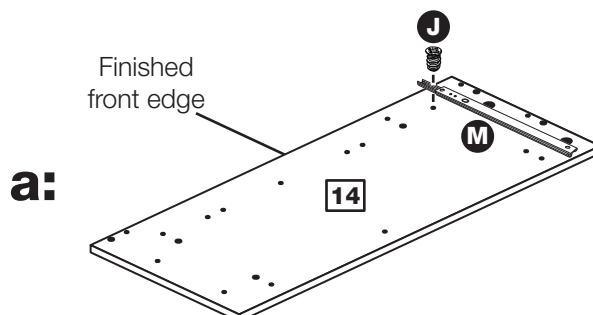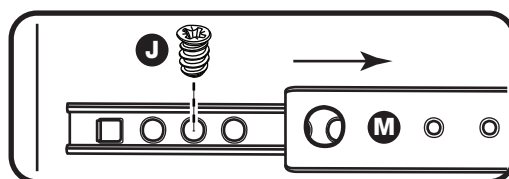

# Assembly Instructions

## Step 22

### Prepare the right side

**a:** Place a runner **M** on the right side **15** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.






**b:** Slide the runner **M** back the other way and fit the 2nd screw **J** into the corresponding hole in the right side **15**.

**c:** Screw 6 metal dowels **A** into the right side **15**.

**d:** Insert 2 large locking nuts **B** into the right side **15**.

Tap 2 wooden dowels **D** into the right side **15**.

Fit 2 hinge plates **P** onto the right side **15**, making sure that the slot is facing towards the finished front edge.

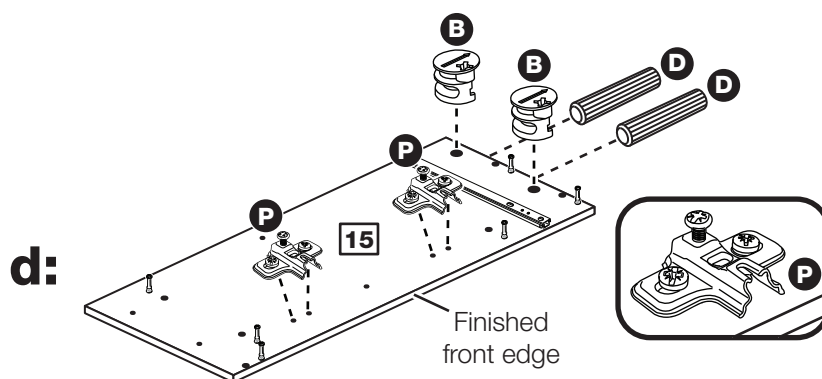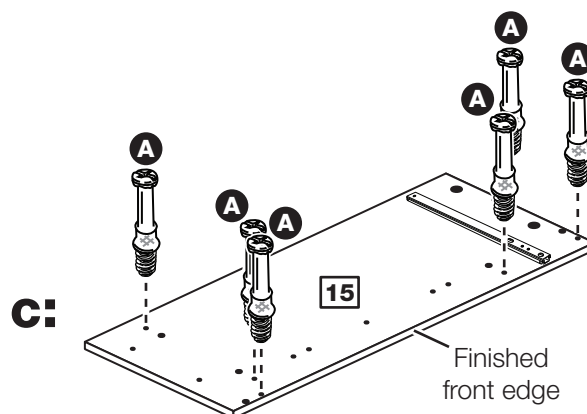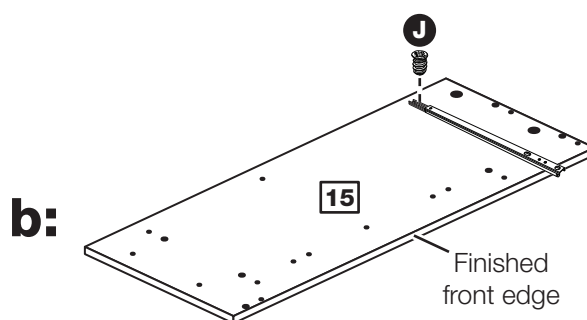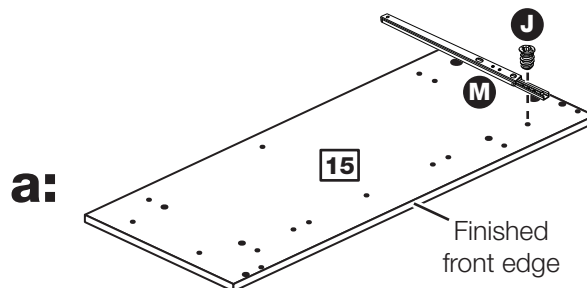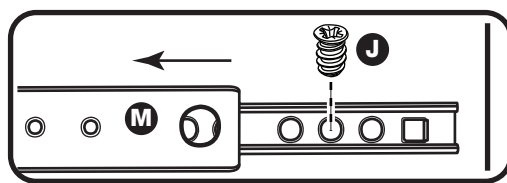


# Assembly Instructions

## Step 23

### Fit the base to the right side

Push the base **18** onto the right side **15**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the base **18**.

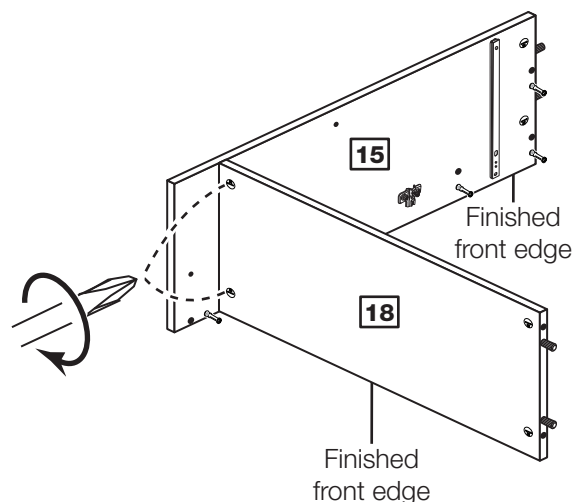

## Step 24

### Prepare the divider

**a:** Place a runner **M** on the divider **17** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

**b:** Slide the runner **M** back the other way and fit the 2nd screw **J** into the corresponding hole in the divider **17**.


**c:** Insert 3 large locking nuts **B** into the divider **17**.

Tap 3 wooden dowels **D** into the divider **17**.

### Turn the divider over

**d:** Place a runner **M** on the divider **17** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

**e:** Slide the runner **M** back the other way and fit the 2nd screw **J** into the corresponding hole in the divider **17**.

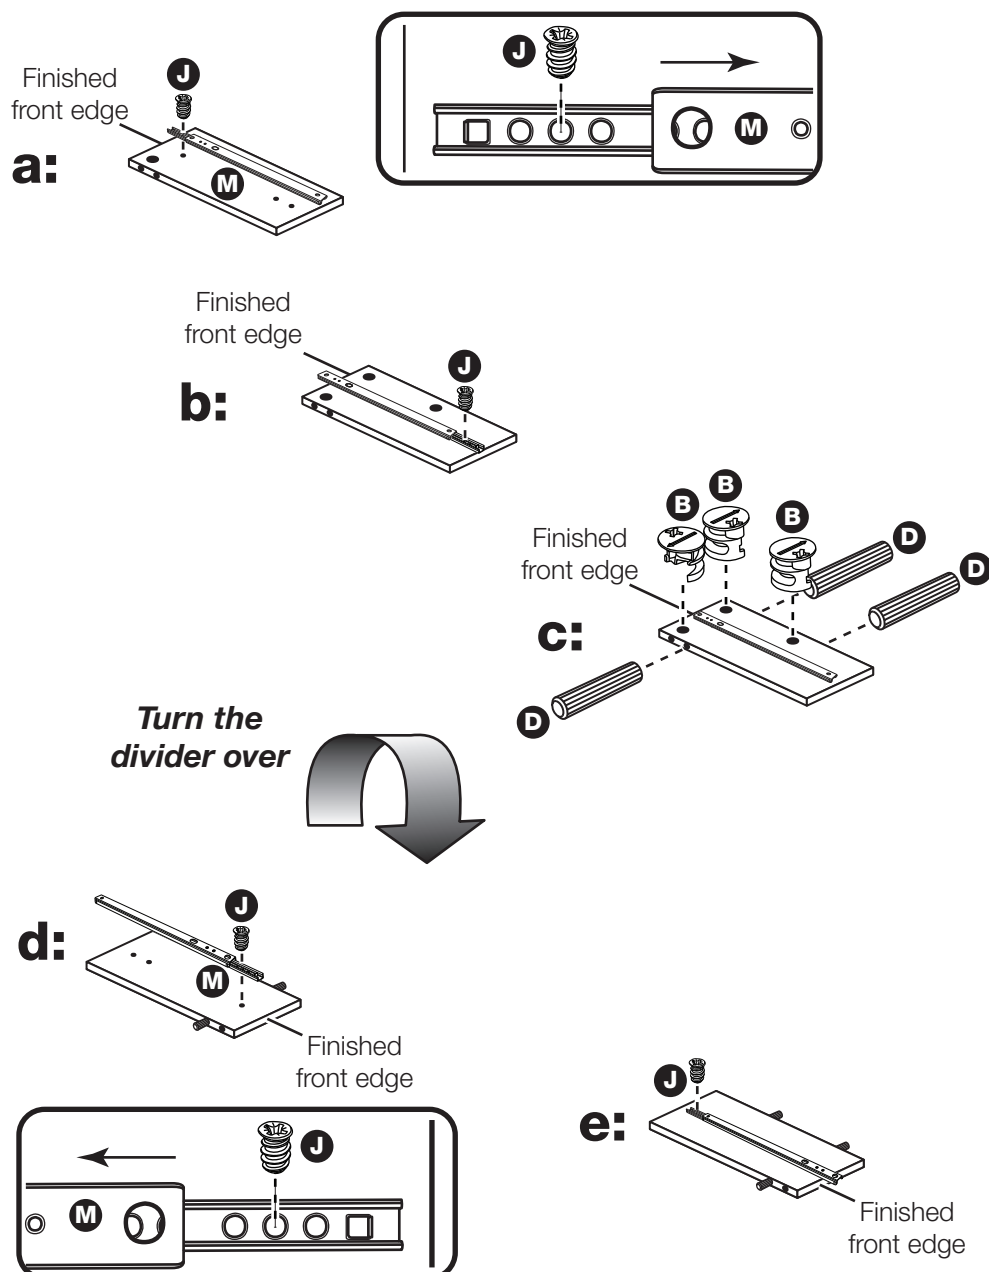

# Assembly Instructions


## Step 25

### Prepare 3 of the rails

Screw a metal dowel **A** into each of the rails **6**.

Insert 2 large locking nuts **B** into each of the rails **6**.

Tap 2 wooden dowels **D** into each of the rails **6**.

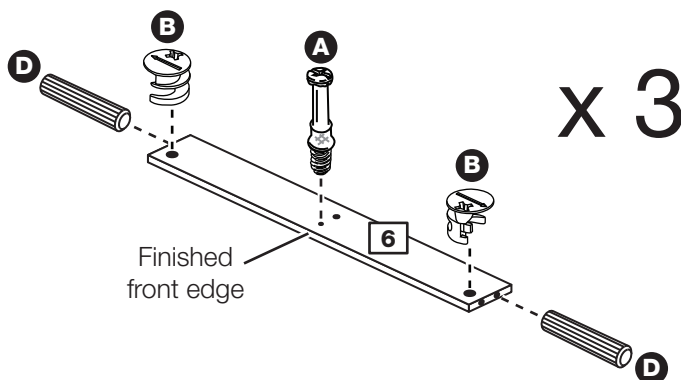


## Step 26

### Fit 2 rails to the divider

Push the 2 rails **6** onto the divider **17**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the divider **17**.

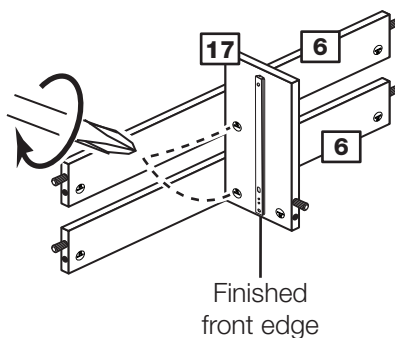


## Step 27

### Fit the other rail to the divider

Push the rail **6** onto the divider **17**.

Use a screwdriver to tighten the large locking nut **B** fitted to the divider **17**.

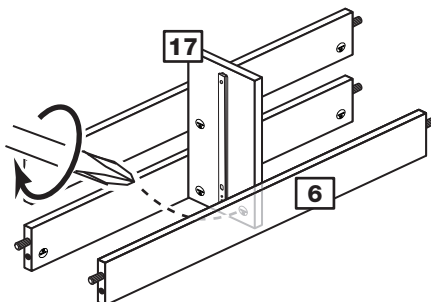


# Assembly Instructions

## Step 28

### Fit the rail and divider assembly

Push the 3 rails **6** fitted to the divider **17** onto the right side **15**.

Use a screwdriver to tighten the 3 large locking nuts **B** fitted to the rails **6**.

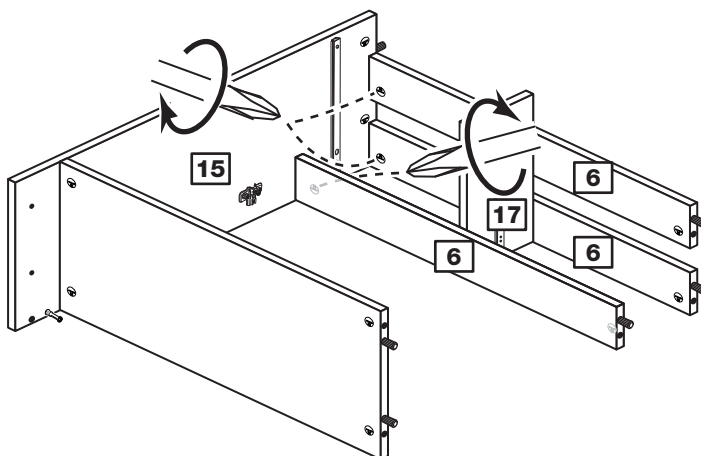


## Step 29

### Prepare the last rail

Insert 2 large locking nuts **B** into the rail **6**.

Tap 2 wooden dowels **D** into the rail **6**.

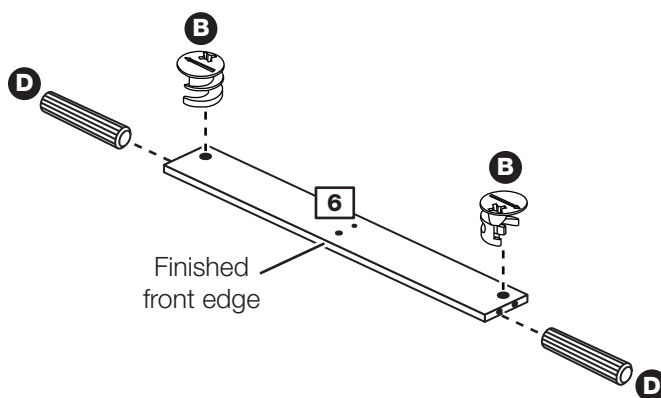


## Step 30

### Fit the rail

Push the rail **6** onto the right side **15**.

Use a screwdriver to tighten the large locking nut **B** fitted to the rail **6**.

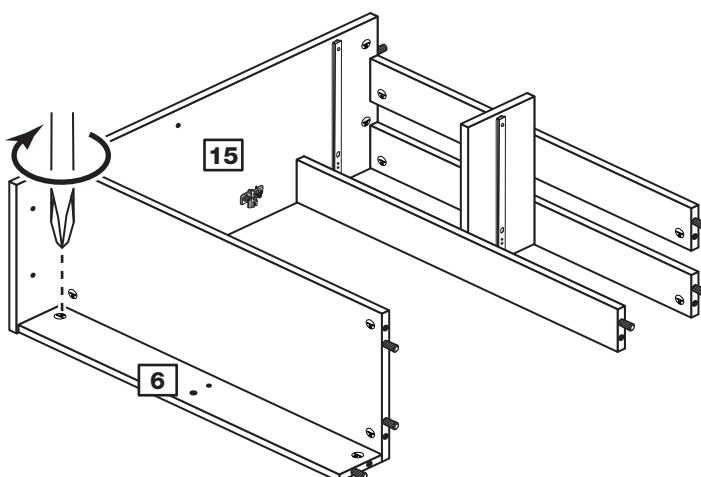




# Assembly Instructions

## Step 31

### Fit the left side

Push the left side **14** onto the assembly.


Use a screwdriver to tighten the 6 large locking nuts **B** fitted to the rails **6** and base **18**, shown circled.

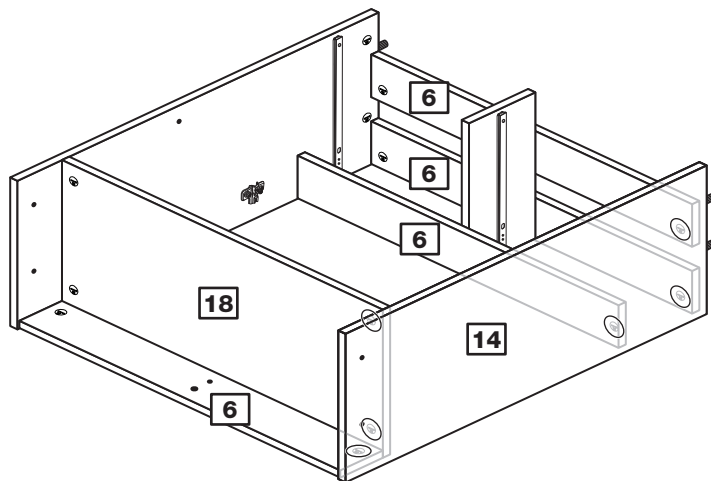

## Step 32

### Fit the 4 plastic nails

Tap 2 plastic nails **L** into the bottom edge of each of the sides **14** and **15**.

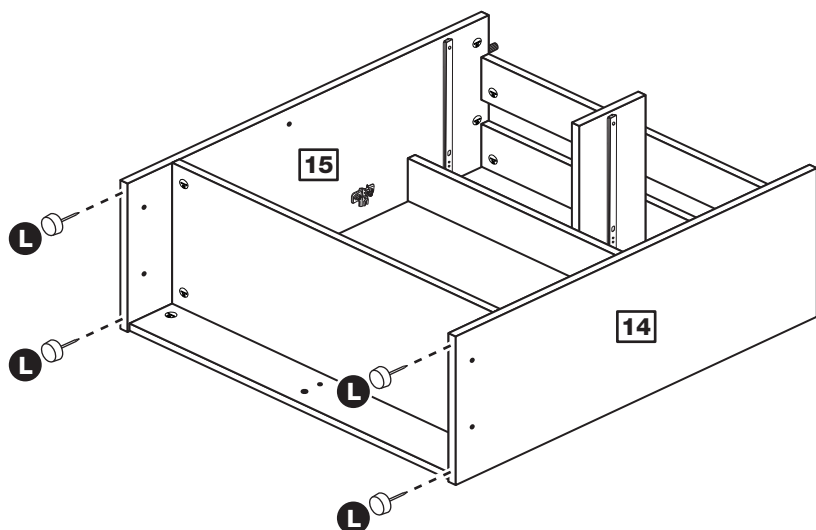

# Assembly Instructions

## Step 33

### Fit the small back


**a:** Square up the unit by making sure that measurement **x to x** equals **y to y**.

**b:** Place the small back **21** onto the unit with the bottom edge flush with the base **18**.

Nail **E** around the 3 outside edges of the small back **21**, as shown.

**Note:** Nails should be spaced about 150mm apart.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

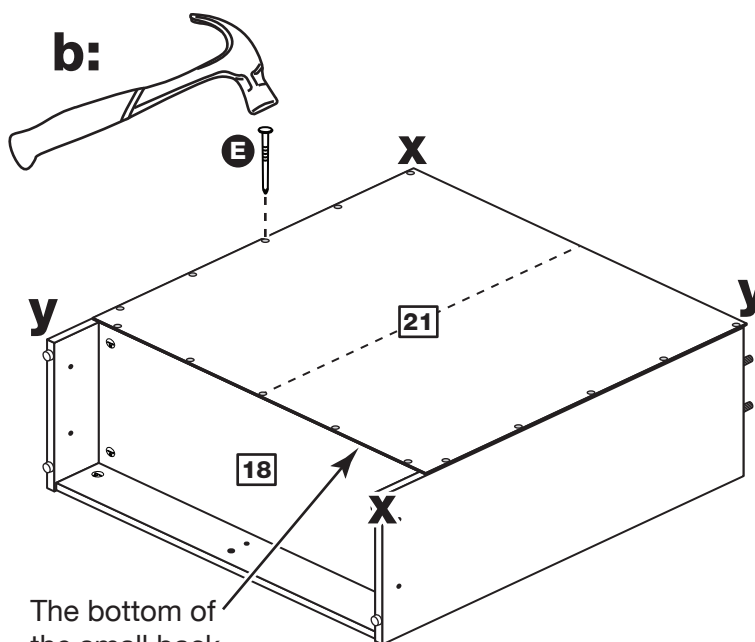

## Step 34


### Raise the assembly

**Note:** To make it easier to fit the rest of the panels, place polystyrene blocks from the packaging underneath the side panels to raise the assembly.

**Stand the unit up for the next step.**



**Warning:** The unit is heavy. Lift with care.

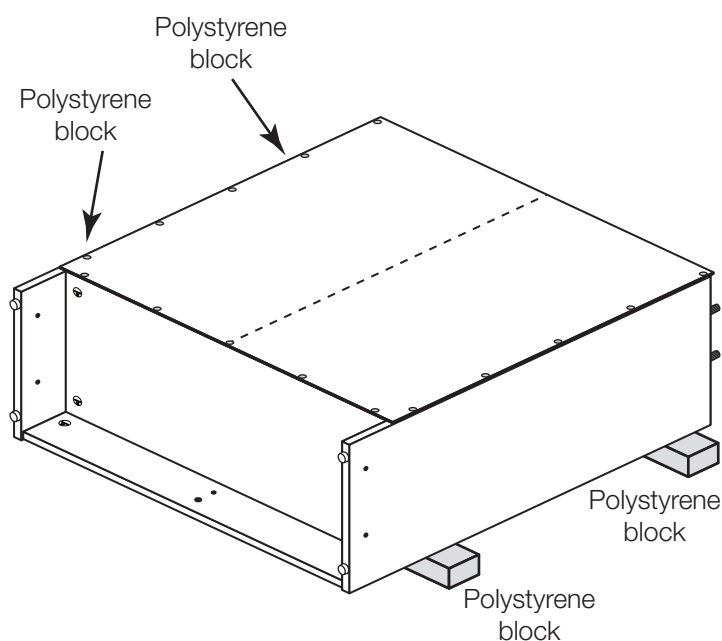


# Assembly Instructions

## Step 35

### Prepare a side plinth

Insert a large locking nut **B** into 1 of the side plinths **8**.

Tap a wooden dowel **D** into the side plinth **8**.

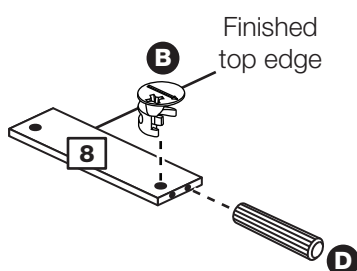


## Step 36

### Prepare the other side plinth

Insert a large locking nut **B** into the side plinth **8**.


Tap a wooden dowel **D** into the side plinth **8**.

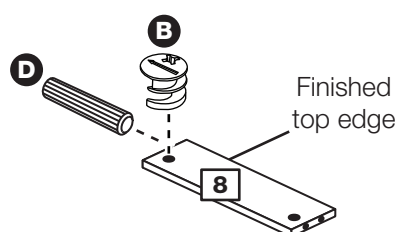

## Step 37

### Prepare the front plinth

Screw 2 metal dowels **A** into the front plinth **7**.

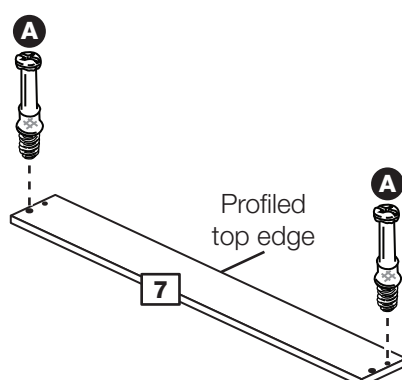


## Step 38

### Fit the plinths together

Push the 2 side plinths **8** onto the front plinth **7**.

Use a screwdriver to tighten the large locking nuts **B** fitted to the side plinths **8**.

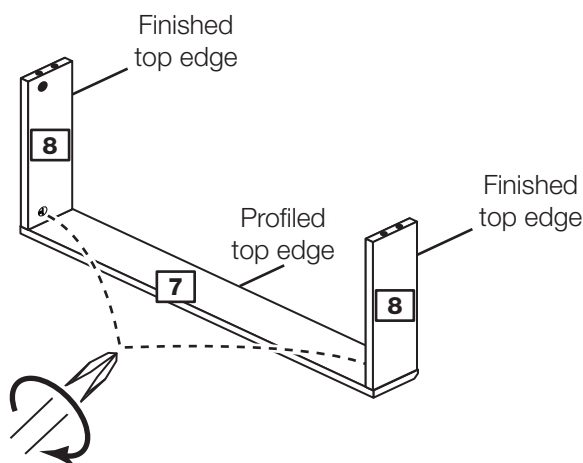

# Assembly Instructions

## Step 39

### Fit the plinths


Position the 3 plinths onto the assembly ensuring that the bottom edge of the plinths are flush with the bottom edge of the sides, as shown.

Secure the 2 side plinths **8** through the left side **14** and right side **15** using 4 screws **H**.

**Carefully stand the unit up for the next step.**



**Warning:** The unit is heavy. Lift with care.

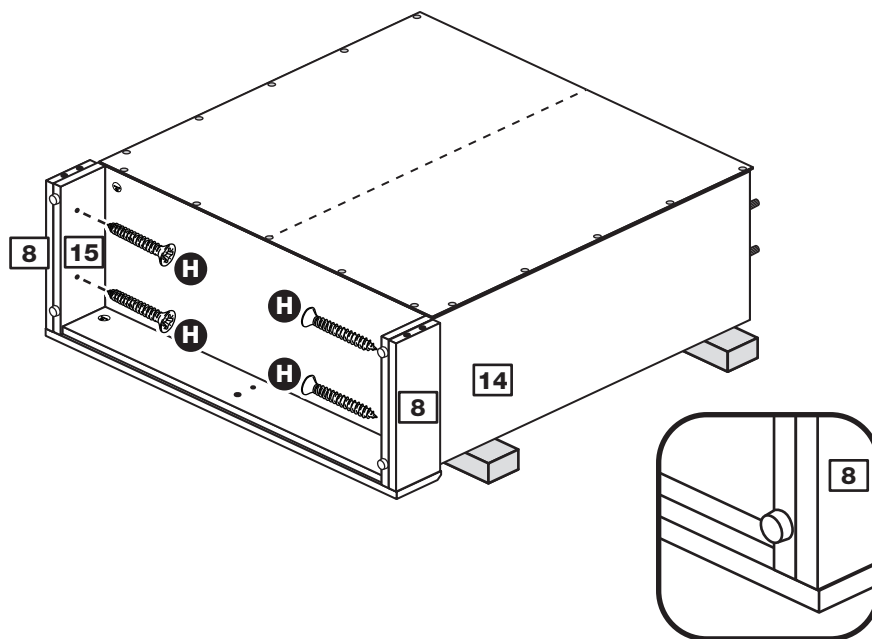

## Step 40

### Fit the 2 assemblies together


Using 2 people carefully lift the top assembly onto the bottom assembly.

Use a screwdriver to tighten the 4 large locking nuts **B** fitted to the left side **14** and right side **15**.

Nail **E** along the top edge of the small back **21**.



**Warning:** The unit is heavy. Lift with care.

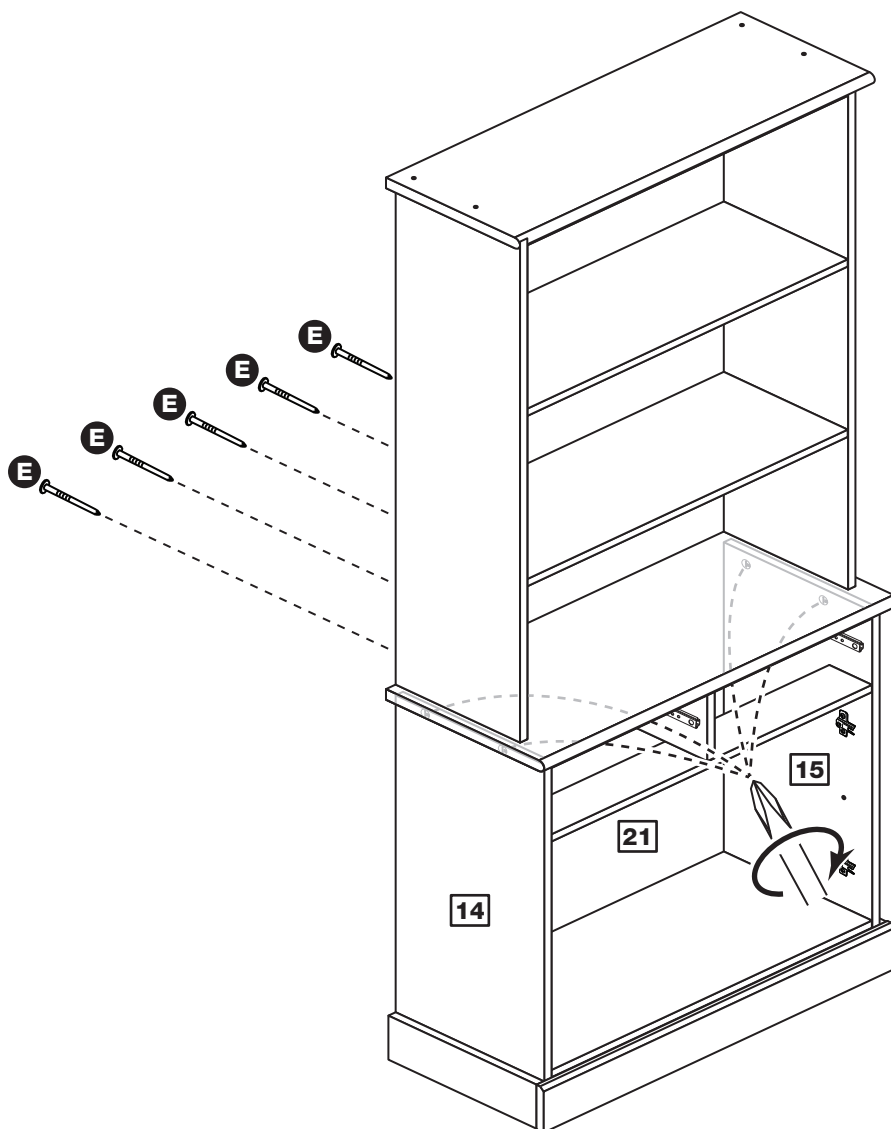

# Assembly Instructions

## Step 41

### Fit the drawers and loose shelf


Slide both the runners **M** forward and locate the drawer sides **2** and **3** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **M**.

Working from the inside of the drawer, insert 2 screws **I** through the drawer sides and out into the 2nd threaded hole in the runner.

**Note:** Do not overtighten the screws **I**. If they catch on the runner you may need to loosen them slightly.

Insert 4 shelf studs **R** into the sides **14** and **15**.

Lower the loose shelf **19** down onto the shelf studs **R**.

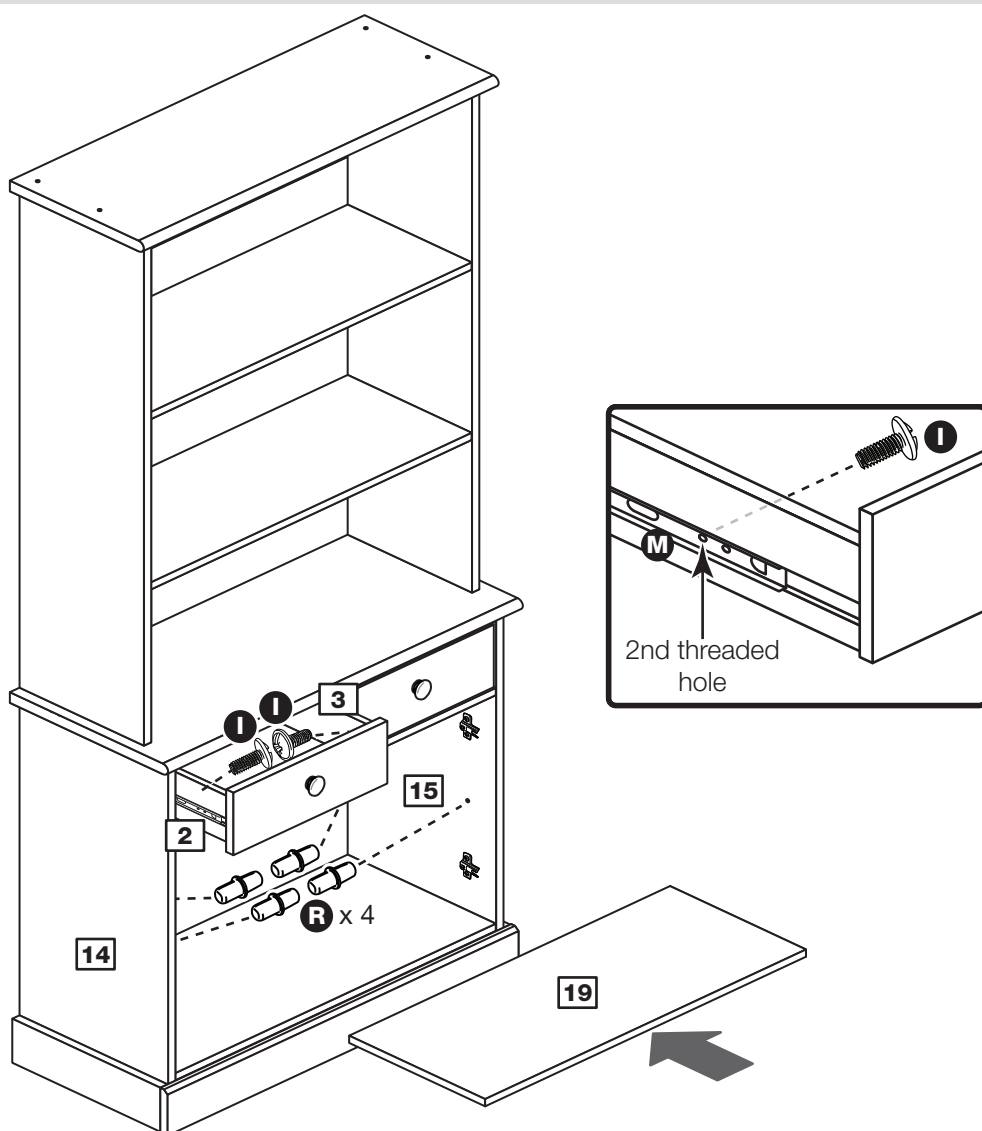



## Step 42

### Prepare the 2 doors

Push fit 2 hinges **Q** into each of the 2 doors **20**.

Secure each hinge with 2 screws **K**.

**Note:** Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

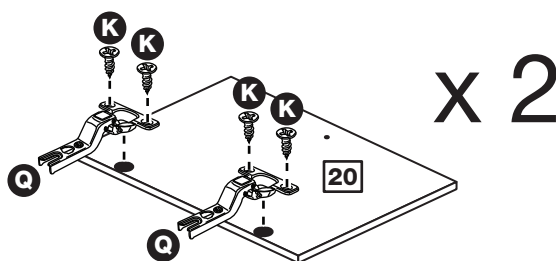

# Assembly Instructions

## Step 43

### Fit doors and handles

**Note:** The easiest way to attach each door **20** is to fit the top hinge first, then align and fit the other hinge.



**a:** Push the hinge **Q** onto the front part of the hinge plate **P**. The recess at the bottom of screw B goes into the slot in the hinge plate.

**b:** Keep the hinge **Q** FLAT against the hinge plate **P** as you slide it across as far as it will go. Tighten screw A.

**c:** The hinge **Q** must be flat against the hinge plate **P** prior to any adjustment.

**d:** The hinge **Q** must NOT be AT AN ANGLE to the hinge plate **P** when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

**e:** Attach a handle **S** to each door **20** using screws **G**.

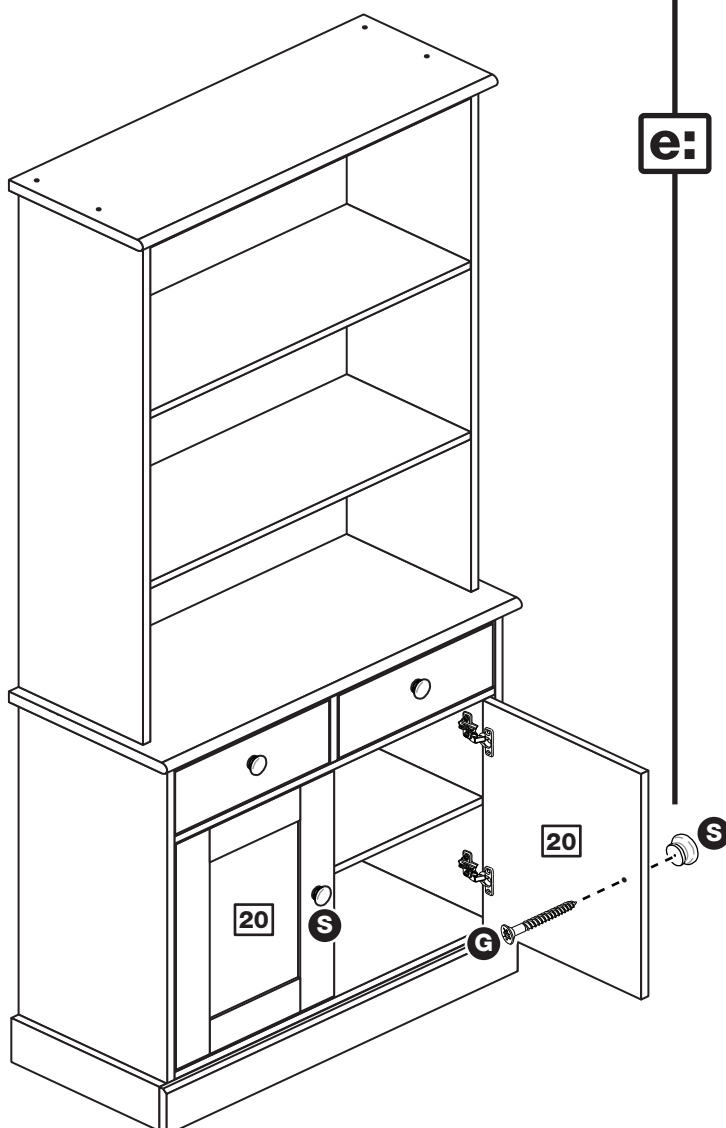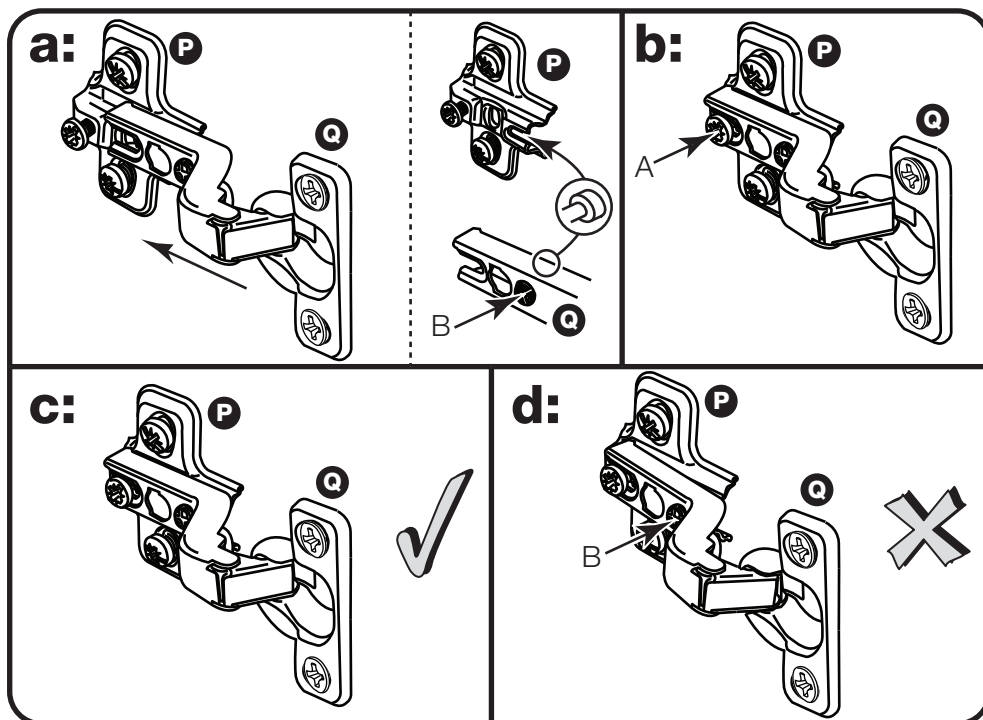

# Assembly Instructions

## Step 44

### Adjust the doors if needed

**a:** Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

### **b:** Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

### **c:** Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

### **d:** Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

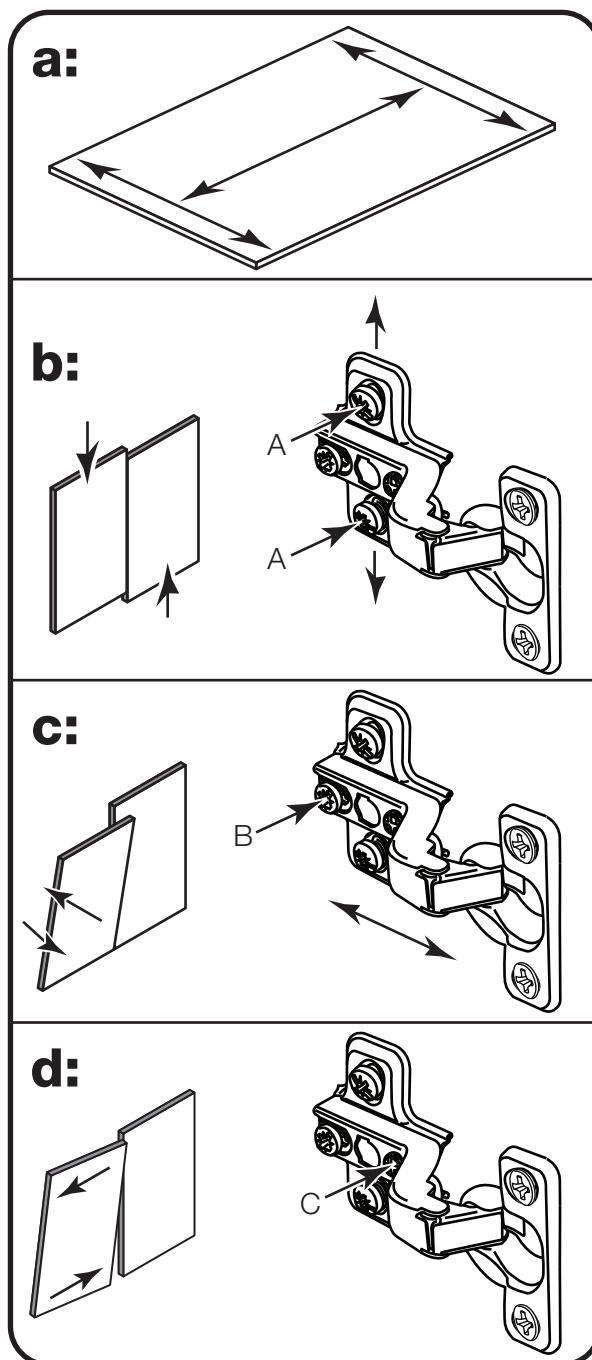

# Assembly Instructions

## Step 45


### Fit the overbalance protector kit

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit **T** to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

**Note:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

**Assembly is complete**

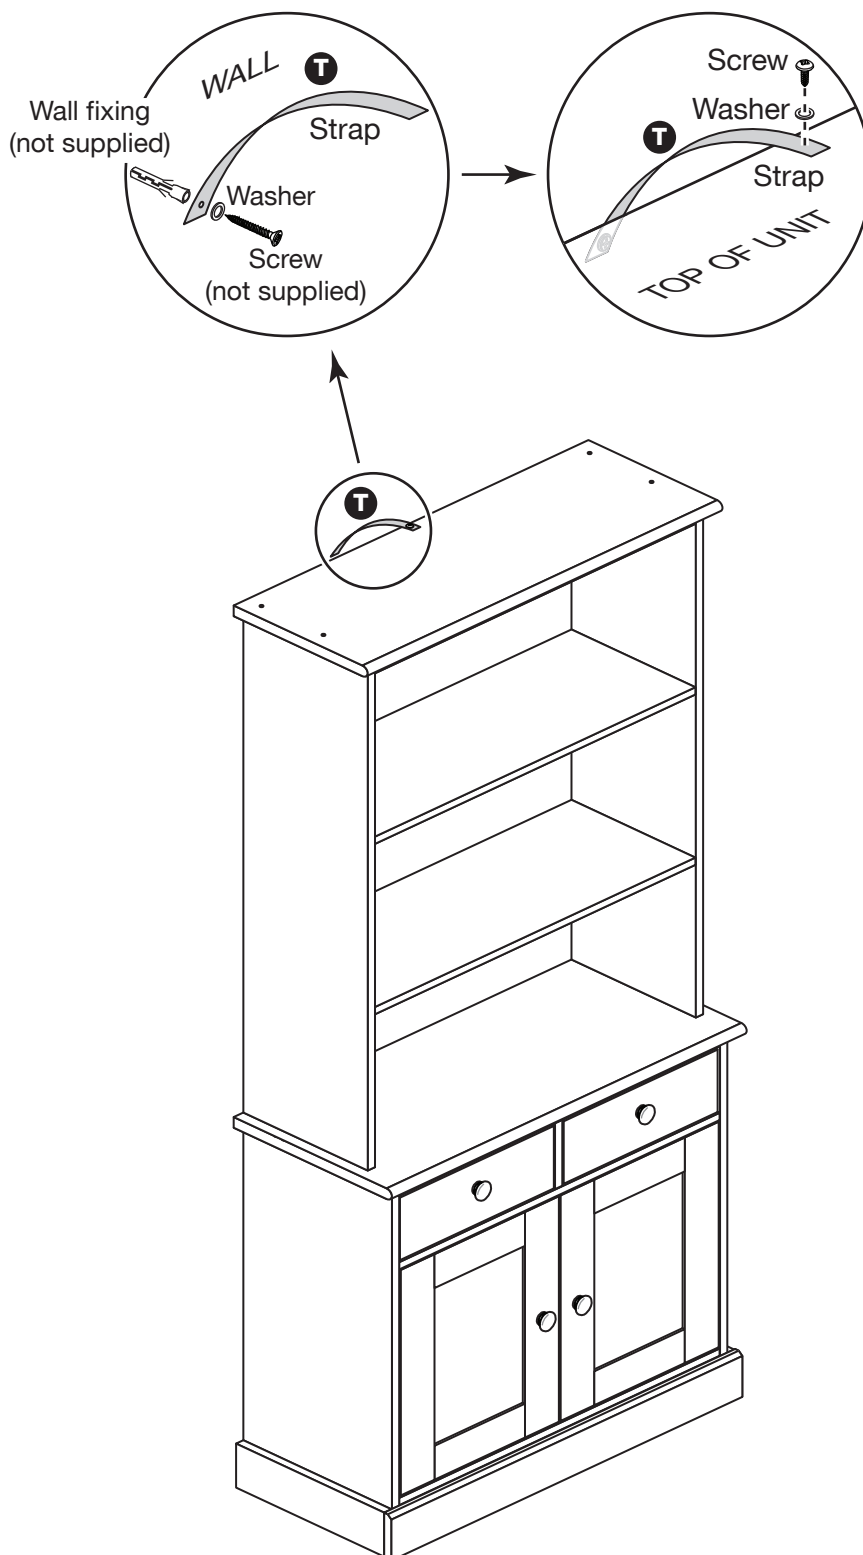

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)  
Alternatively, call the Spares Helpline on: 0370 112 1928.  
For any other queries please contact the Customer Helpline on: 0345 640 2020