


Hygena Lumina 6Drawer Coffee Table

Assembly Instructions - Please keep for future reference

482/7832

hygena

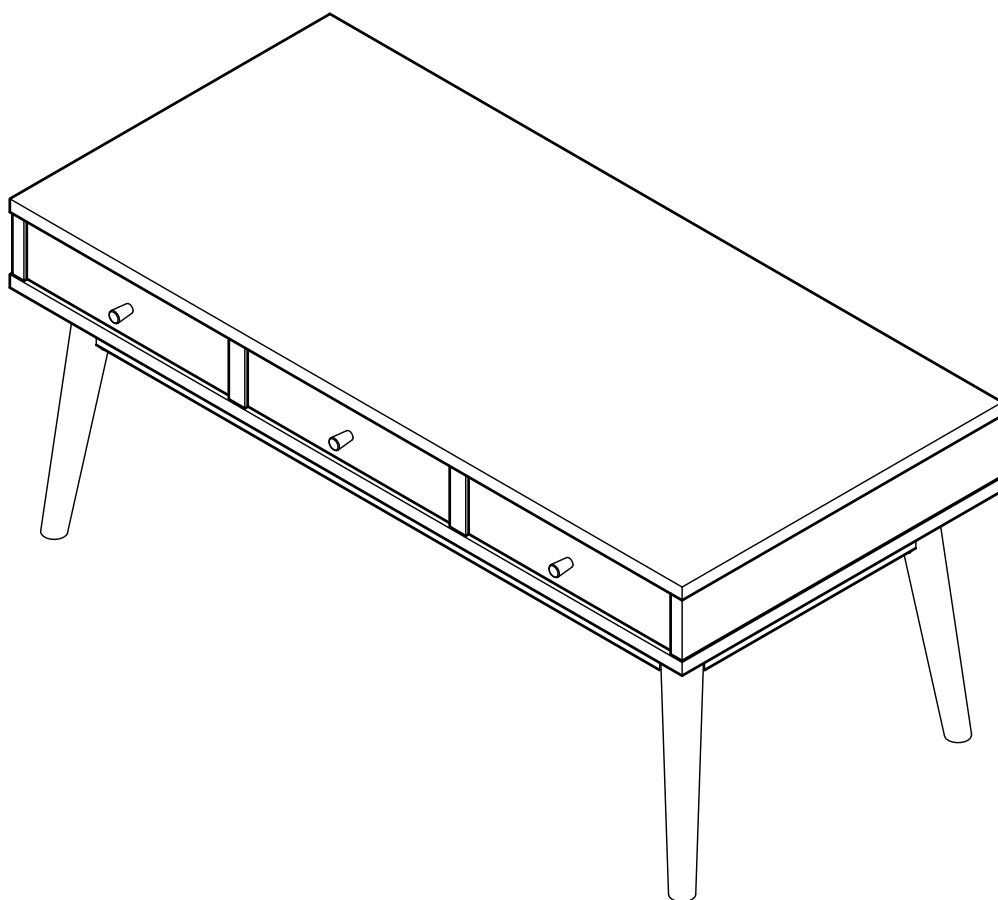

Dimensions

Width - 105cm

Depth - 50cm

Height - 45cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.

- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.


- Regularly check and ensure that all bolts and fittings are tightened properly.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components,
call the **Customer Helpline: 03456 400800**


Please check you have all the panels listed below

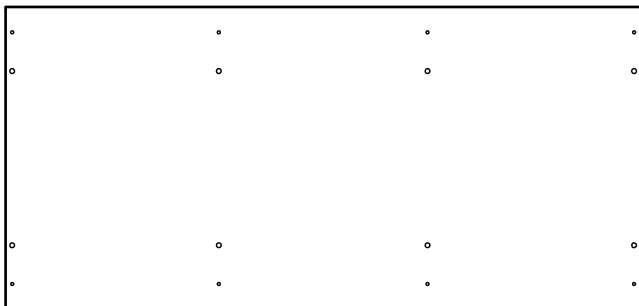


1 Top panel (105 x 50cm)

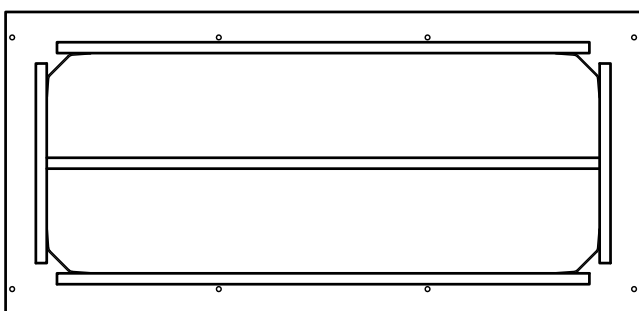


2 Bottom panel (105 x 50cm)




5 Drawer front x2 (31.7 x 8cm)




6 Drawer front x2 (31.7 x 8cm)




7 Drawer front x2 (31.7 x 8cm)



8 Drawer left side x6
(21.8 x 7cm)




9 Drawer right side x6
(21.8 x 7cm)



10 Drawer back x6 (29 x 7cm)



11 Drawer bottom x6
(30 x 21.4cm)



3 Left side panel x2 (8.4 x 49.6cm)



4 Middle side panel x2 (8.4 x 49.6cm)


















Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 03456 400800**

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Locking pin x 20	B  12mm Locking nut x 8	C  Ø8 Dowel x 16
D  57mm Screw x 8	E  9mm Locking nut x 12	F  Ø6 Dowel x 12
G  31mm Screw x 24	H  35mm Screw x 8 set	I  Handle x 6
J  Handle screw x 6	K  Drawer runner x 12	L  Runner screw x 24
M  Plastic pin x 12	N  Solid wood leg & sticker x 4	O  Screwdriver x 1

Tools required

 Phillips screwdriver
(medium & large)

Ruler - Use this ruler to help correctly identify the screws

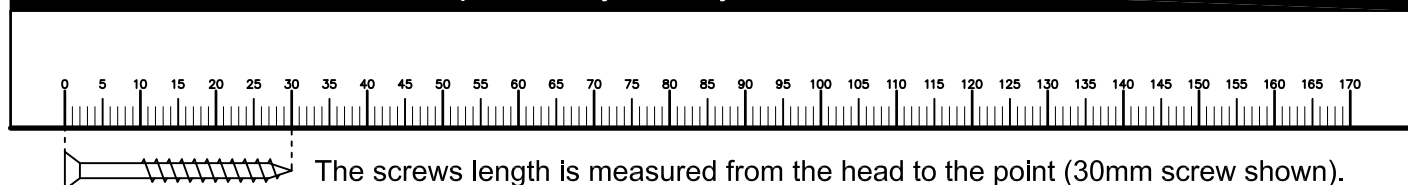


Assembly Instructions

Step 1

Fitting drawer runner

Use screws **L** to fix drawer runners **K** onto the side panels **3** and **4**.


Insert dowels **C** into side panels **3** and **4**.

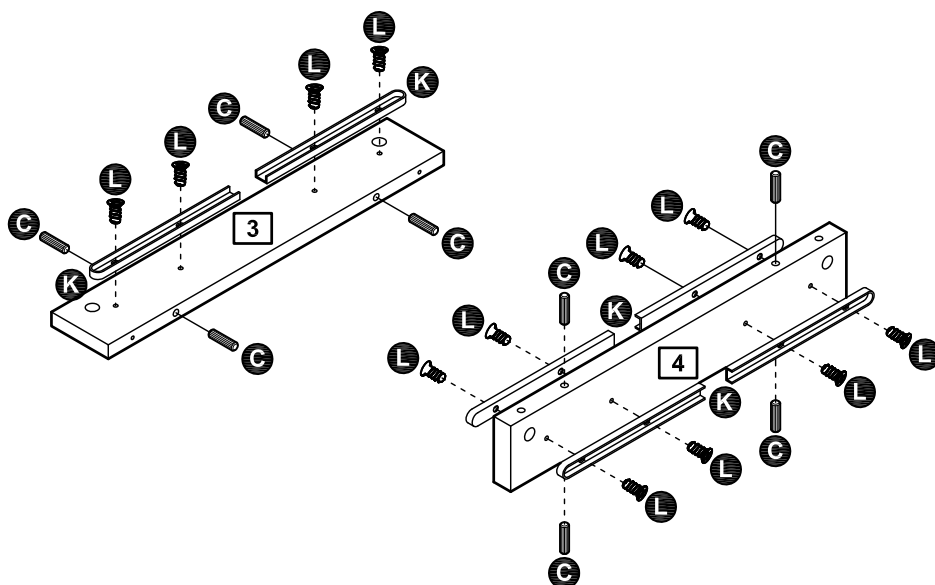

Step 2


Fitting the frame

a: Screw locking pins **A** into top panel **1**. Insert locking pins as far as shown.

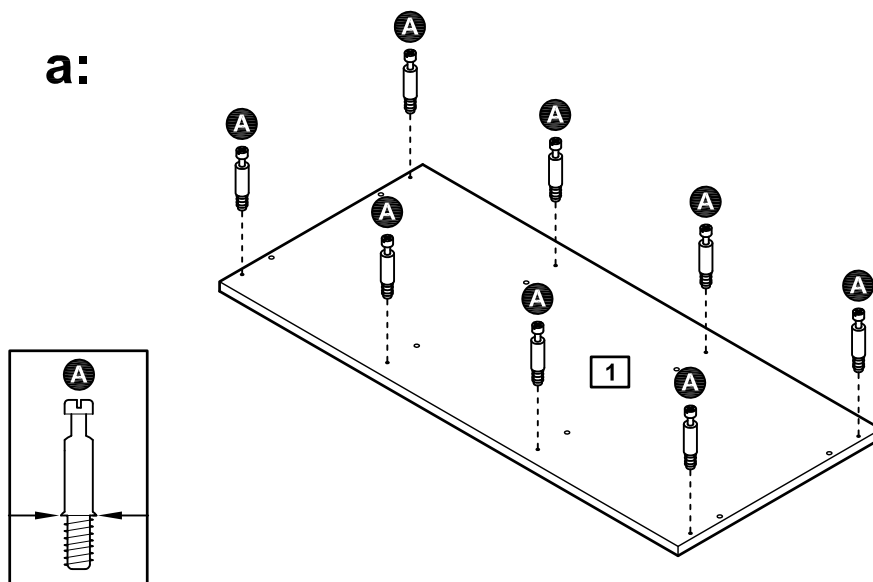

b: Attach side panels **3** and **4** onto top panel **1**.

Insert locking nuts **B** into the unit, then use a screwdriver to turn locking nuts **B** clockwise to lock.

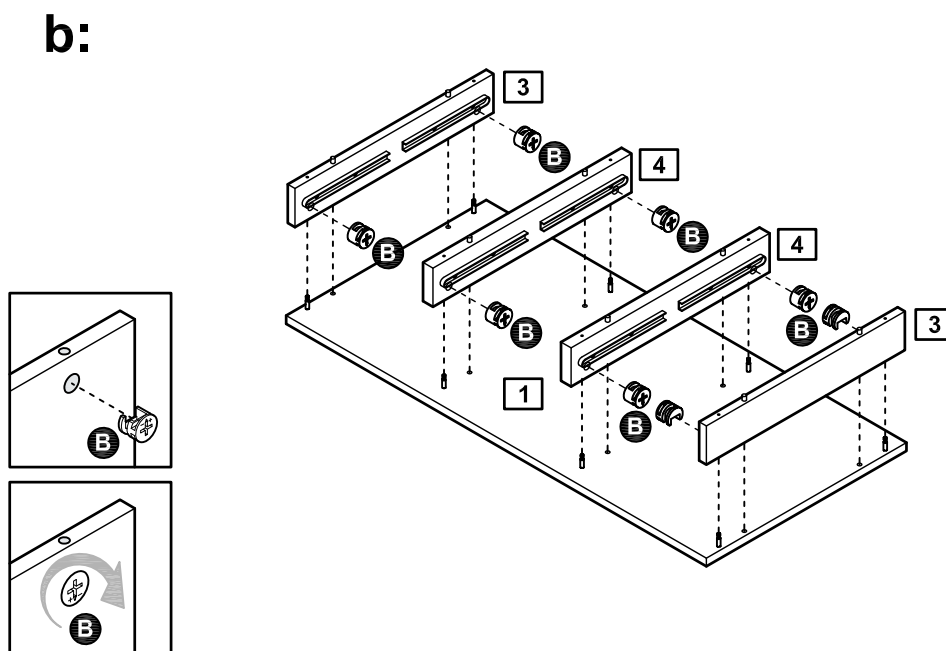


Assembly Instructions

Step 2 - continued

C: Use screws **D** to fix bottom panel **2** onto the unit.


C:

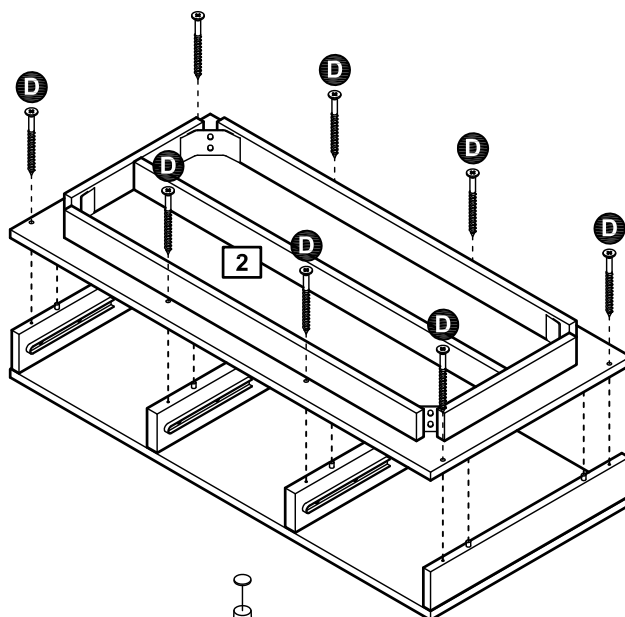

Step 3

Fitting leg

Use screws **H** to fix legs **N** onto the unit by screwdriver **O**.

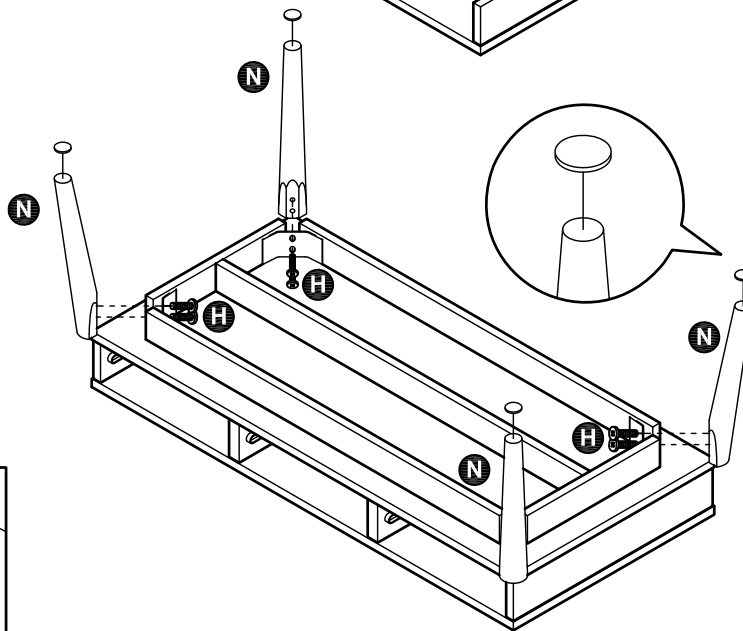

Step 4


Fitting the drawer

a: Use screws **G** to fix drawer side **8** and **9** onto drawer back **10**.

Insert dowels **F** into drawer side **8** and **9**.

Slide drawer bottom **11** into the unit.

a:

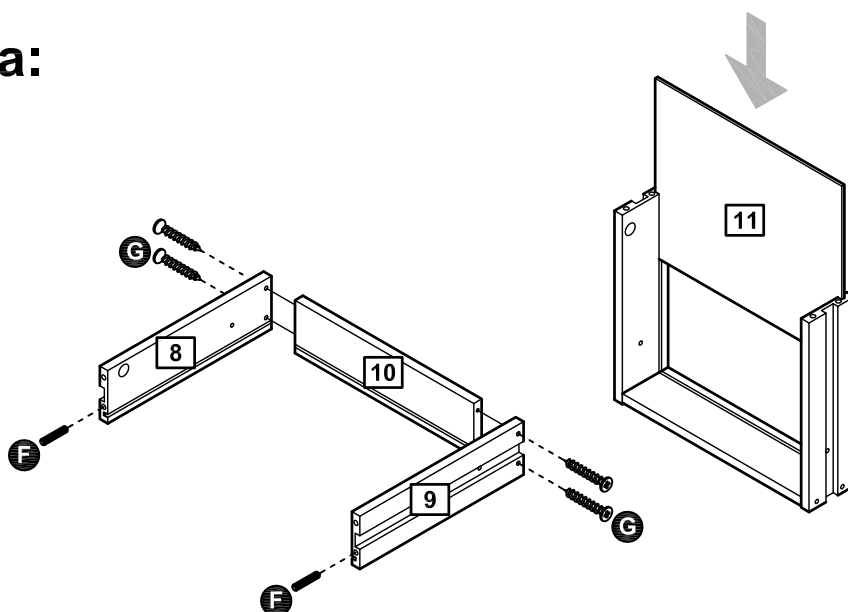

Assembly Instructions

Step 4 - continued


b: Screw locking pins **A** into drawer front **5**, **6** and **7**. Insert locking pins as far as shown.

Use screws **J** to fix handle **I** onto the drawer front **5**, **6** and **7**.

Attach drawer front **5**, **6** and **7** onto the unit.

Insert locking nuts **E** into the unit, then use a screwdriver to turn locking nuts **E** clockwise to lock.

b:

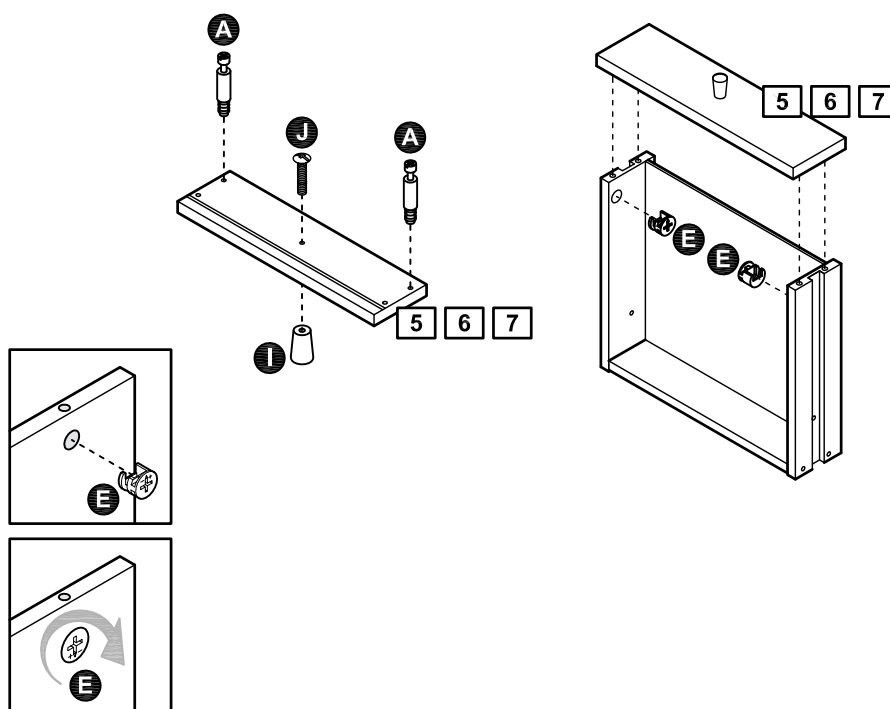


Step 5

Finish the unit

Slide the drawers into the unit.

Insert pins **M** into drawer side.

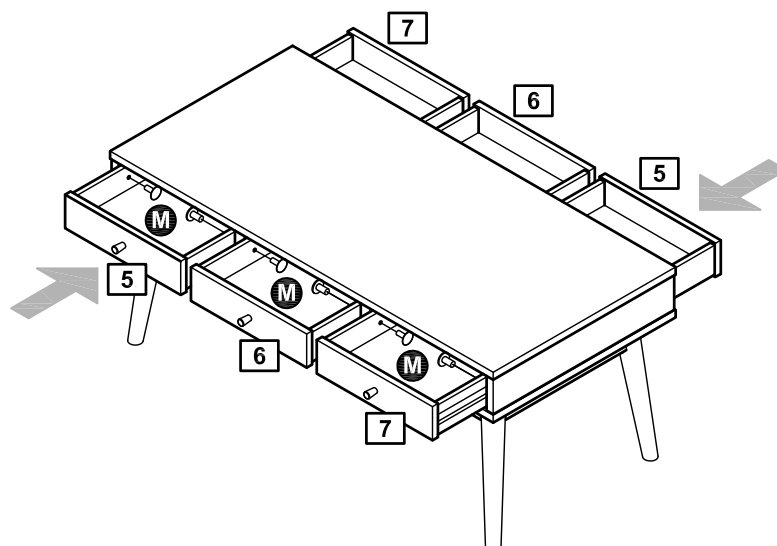

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**