

Sit N' Sleep Bed

Assembly Instructions - Please keep for future reference

758/5418

758/5401



Dimensions

Width - 200cm

Depth - 99/143cm

Height - 170.5cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Because of the size of this unit, it is recommended to assemble it in the room intended for use.
- Do not discard any of the packaging until you have checked that you have all the parts and the pack of fittings.
- Discard all extra fittings and keep fittings out of reach of children.

- Assemble this product on a flat surface.
- Assemble all parts loosely before tightening any bolts.
- At least 2 people are required to assemble this product.
- Unit weight: 38.6kgs.
- Retain Assembly Instructions for future reference.



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Warnings

• READ CAREFULLY - RETAIN FOR FUTURE REFERENCE

- Regularly check and ensure that all bolts and fittings are tightened properly.
- Always use the ladder for entering and leaving the upper bunk.
- The recommended mattress size is L1900 x W910 mm.
- Ensure thickness of mattress does not exceed 220 mm.
- Refrain from using the bunk bed if any structural part is broken or missing.

• Please advise your children to only enter and leave the upper bunk by using the ladder.

• Please prohibit more than one person on the upper bunk.

• Please prohibit children from jumping on the upper and lower beds.

• **WARNING:** Do not allow children under 6 years of age to use the upper bunk due to risk of injury and falls.

• **STRANGULATION HAZARD** - Never attach or hang items such as ropes, strings, cords,

harnesses and belts to any part of the bunk bed.

• **WARNING:** Children can become trapped between the bed and the wall. To avoid risk of serious injury the distance between the top safety barrier and the wall shall not exceed 75 mm or shall be more than 230 mm.

• **THIS BED COMPLIES WITH EN747-1:2012 / EN747-2:2012**

Care and maintenance

• Please clean the unit surface using either damp (not wet) cloth and a mild domestic soap solution or by using an appropriate polish.

• Do not use any abrasive materials when cleaning.

• From time to time check that there are no loose bolts on this unit.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Parts

Please check you have all the parts listed below



Sticker "1"

- 1** Front right-hand endpost
(Ø5 x 170.5cm)



Sticker "2"

- 2** Back right-hand end post
(Ø5 x 170.5cm)




Sticker "3"

- 3** Back left-hand end post
(Ø5 x 170.5cm)




Sticker "4"


- 4** Front left-hand end post
(Ø5 x 170.5cm)




- 5** Upper side safety rail x 2
(91 x 36 x 4cm)




- 6** Lower side rail x 2
(91 x 4 x 2cm)




- 7** Middle side rail x 2
(89 x 2 x 2cm)

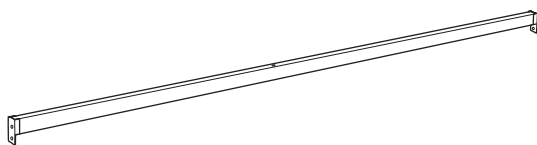


- 8** Lower rail
(190 x 6.5 x 2.5cm)

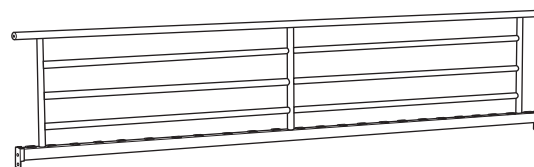

- 9** Upper back safety rail
(190 x 41.5 x 2.5cm)

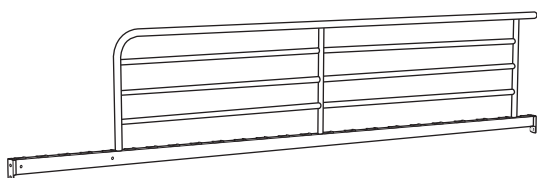


- 10** Upper front safety rail
(190 x 41.5 x 2.5cm)

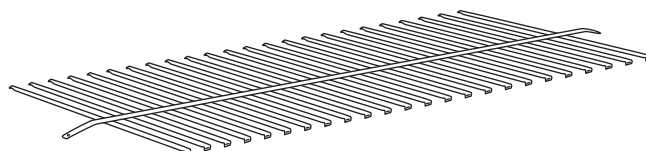


- 11** Slats (with webbing attached) x 24
(94 x 2.5 x 2.6cm)

Components - Parts (cont.)

Please check you have all the parts listed below

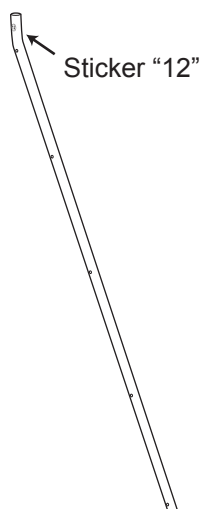


12 Left ladder side rail
(Ø2.5 x 141cm)

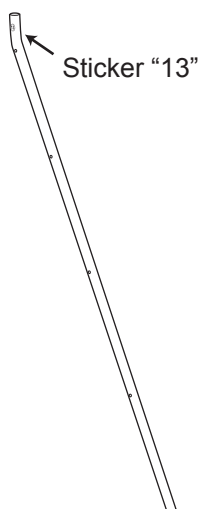


13 Right ladder side rail
(Ø2.5 x 141cm)



14 Ladder step x 4
(Ø2.5 x 29 cm)




15 Ladder brace
(45.5 x 1.5 x Ø1cm)




16 Shelf side frame x 2
(52 x 33 x 1.6cm)




17 Shelf brace x 4
(Ø1.3 x 72cm)



18 Small shelf panel
(72 x 24 x 1.2cm)



19 Big shelf panel
(72 x 33 x 1.2cm)

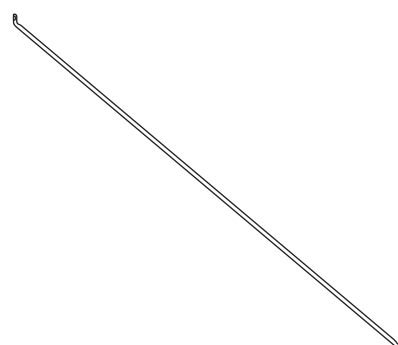


















20 Back brace x 2
(135.5 x 2 x Ø1.3cm)

Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A  M6 x 80mm Bolt x 11	B  M6 x 50mm Bolt x 8	C  M6 x 35mm Bolt x 2
D  M6 x 27mm Bolt x 12	E  M6 x 20mm Bolt x 11	F  M8 x 60mm Bolt x 12
G  Big screw x 8	H  Small screw x 2	I  M8 Curved washer x 12
J  M6 Curved washer x 19	K  Plastic washer x 8	L  Wall strap x 1
M  M6 Lock nut x 6	N  Spring washer x 8	O  Plastic cap x 8
P  Spanner x 1	Q  Allen key x 1	

Tools required



Crosshead screwdriver

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1

Assembling end panels

Lay all parts flat on a soft surface on the floor to avoid damaging any of the parts.



Note:

Identify and correctly position end posts **1**, **2**, **3** and **4** by looking for the sticker label pasted on the posts.



Note:

Determine your preferred shelf position. Then attach the middle side rails **7** either on the left or right.

a: Attach the lower side rail **6** to end posts **1** and **2** then secure using washers **J** and bolts **A**.







Note: Do not fully tighten bolts at this stage.

b: Attach the upper side safety rail **5** into position and secure using bolts **E**.



Note: Fully tighten all bolts using allen key **Q**.

Repeat above steps to assemble the left-hand end panel as shown in the diagram.

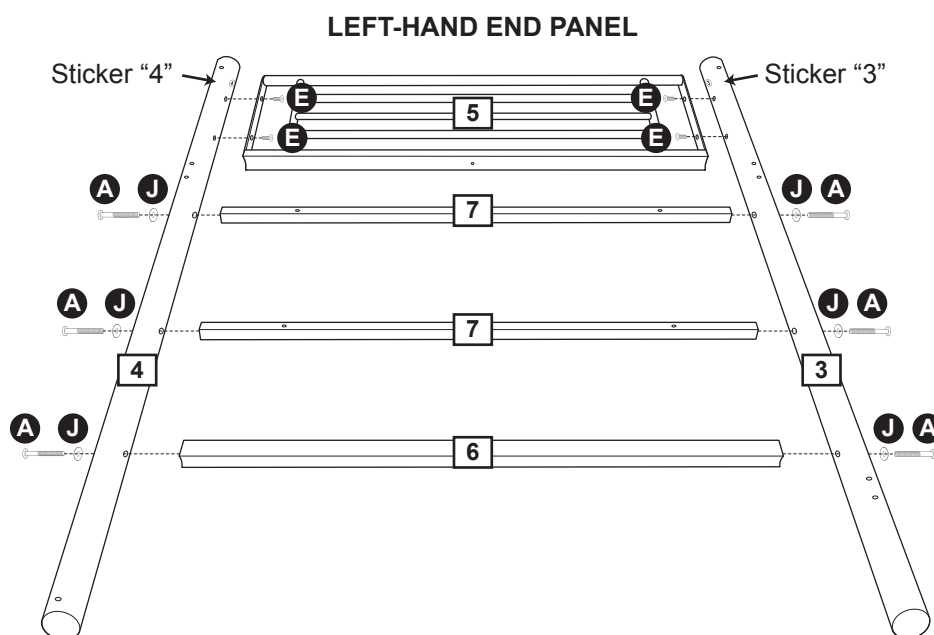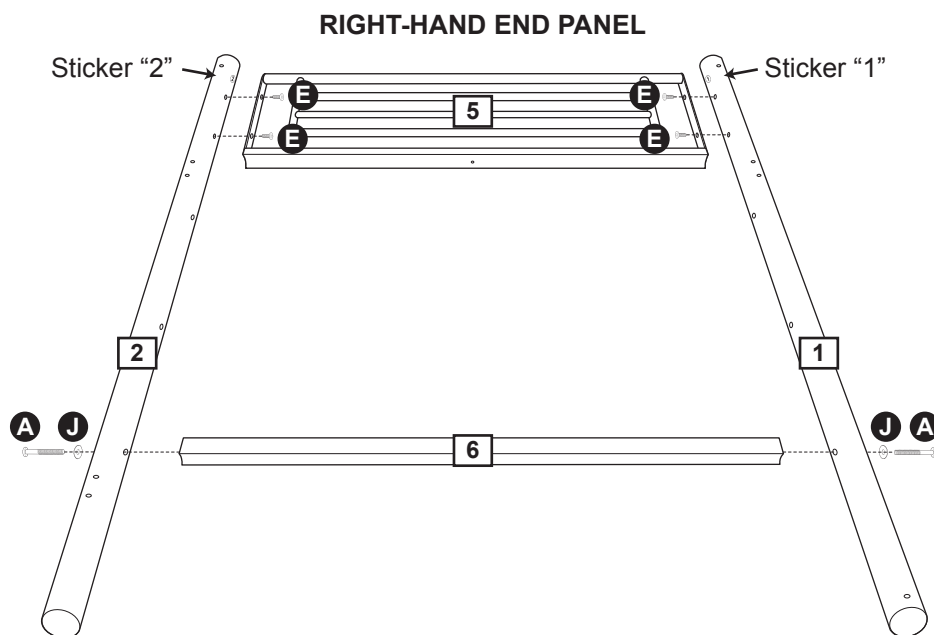

Assembly Instructions

Step 2

Attaching rails



Note: Determine your preferred bunk bed entry position. Then attach the front safety rail **10** with the entry space positioned either on the left or right.

a: Identify the correct rails for assembly and with the help of an assistant attach the lower tubes of upper back safety rail **9**, upper front safety rail **10** and lower rail **8** to end posts using bolts **F**, washers **I** and nuts **M**.



Note: Do not fix bolts on lower holes of back safety rail **9** at this stage.

Locate hole on centre of lower rail **8** and make sure to position it up.



Do not fully tighten bolts at this stage.

b: Attach the top tubes of upper back safety rail **9** and upper front safety rail **10** to end posts using bolts **A** and washers **J**.




Note: Do not fully tighten bolts at this stage.


c: Insert plastic caps **O** into holes on the right end posts **1** & **2** and fix by pushing firmly as shown.

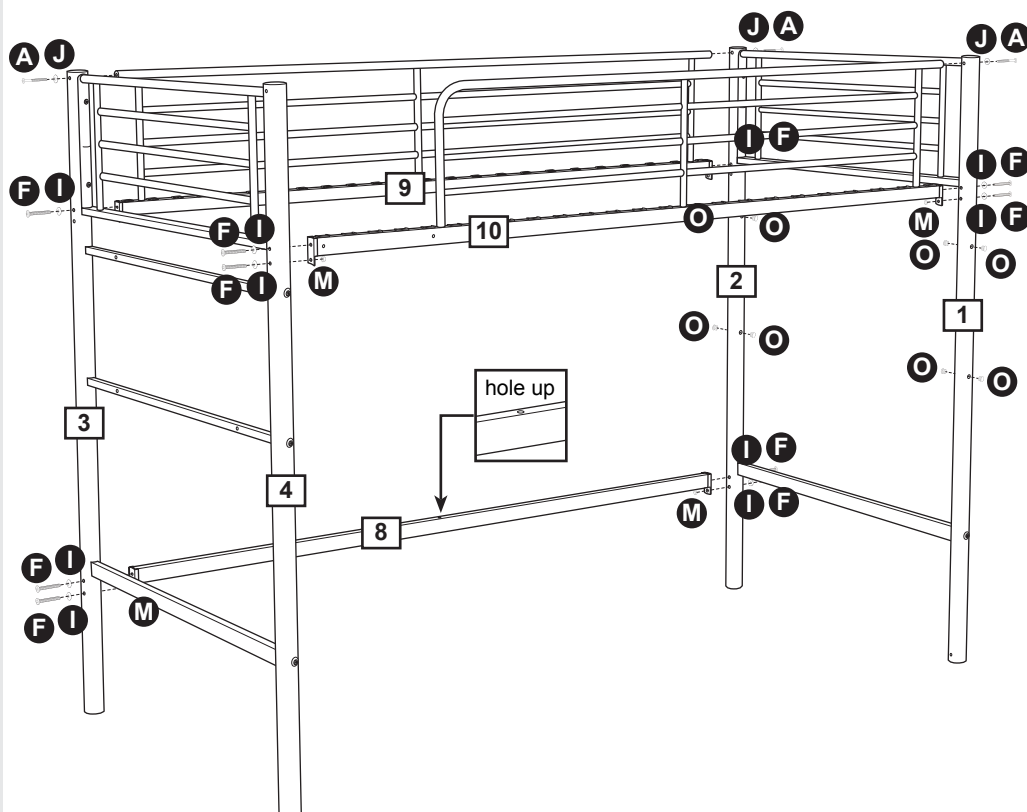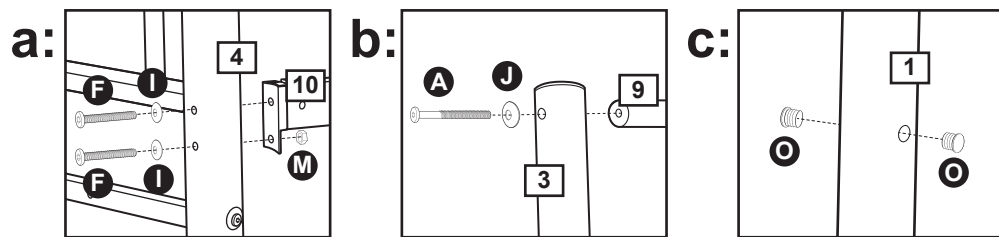

Option for right upper bunk entry

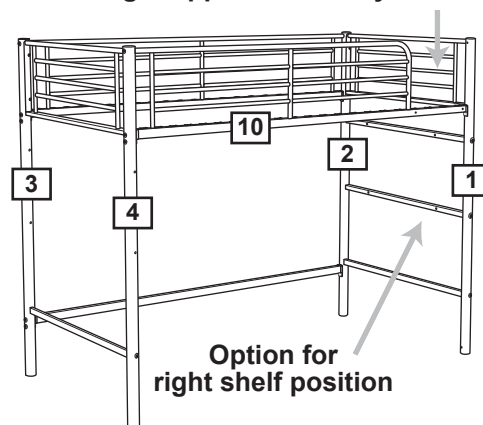

Option for left upper bunk entry

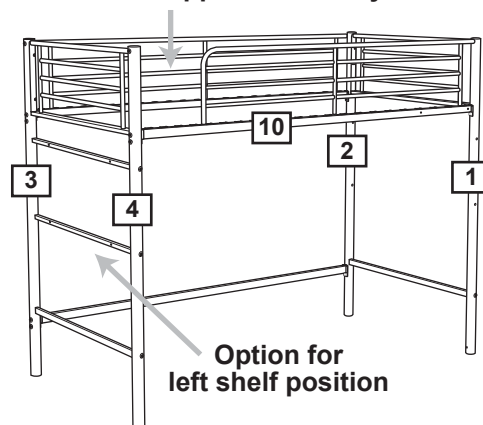

Option for right shelf position

Option for left shelf position

Assembly Instructions

Step 3




Attaching back braces

a: Position the back braces **20** as shown and attach it to upper back safety rail **9** using bolts **F**, washers **I** and nuts **M**.

b: Attach the back braces **20** to lower rail **8** using bolt **E** as shown.



Note: After all bolts in step 2 and 3 are positioned, fully tighten all bolts and nuts using allen key **Q** and spanner **P**.

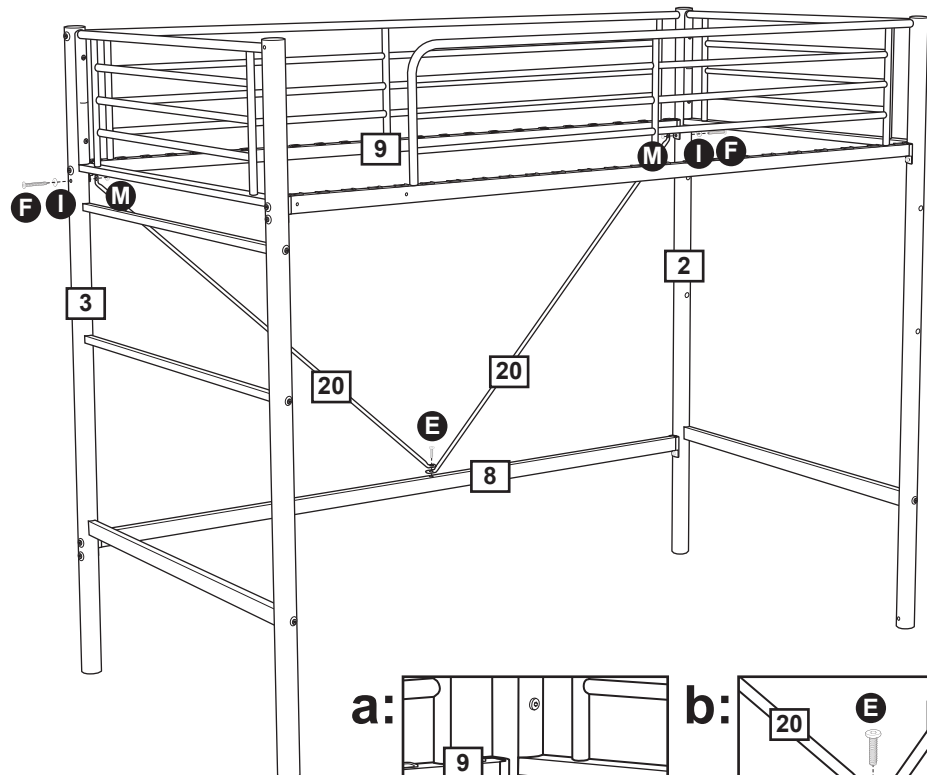

Step 4

Assembling shelf

a: Attach the shelf braces **17** to shelf side frames **16** using bolts **D** as shown.







Note: Do not fully tighten bolts at this stage.

b: Position the shelf panels **18** and **19** as shown and attach it to shelf braces **17** using screws **G**. Tighten screws using a crosshead screwdriver.



Note: After all bolts and screws are positioned, fully tighten all bolts using allen key **Q**.

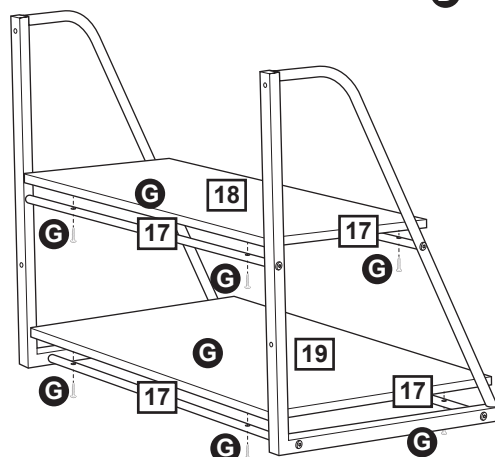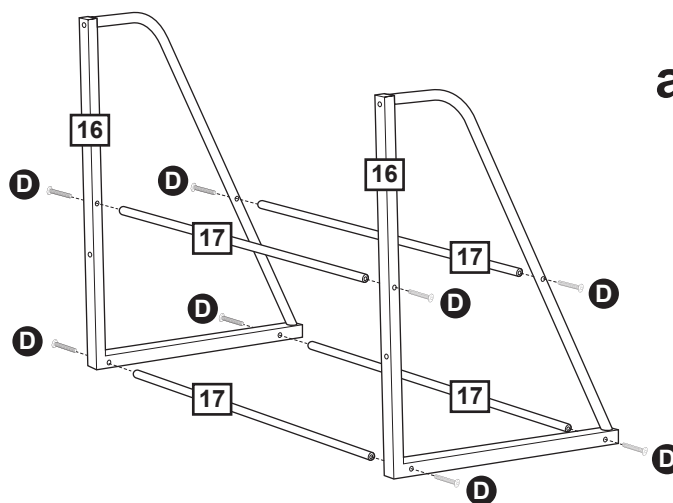


Assembly Instructions

Step 5

Attaching shelf

Position the shelf on the bed as shown and attach the side frames **16** to middle right side rails **7** using bolts **D**. Tighten bolts using allen key **Q**.



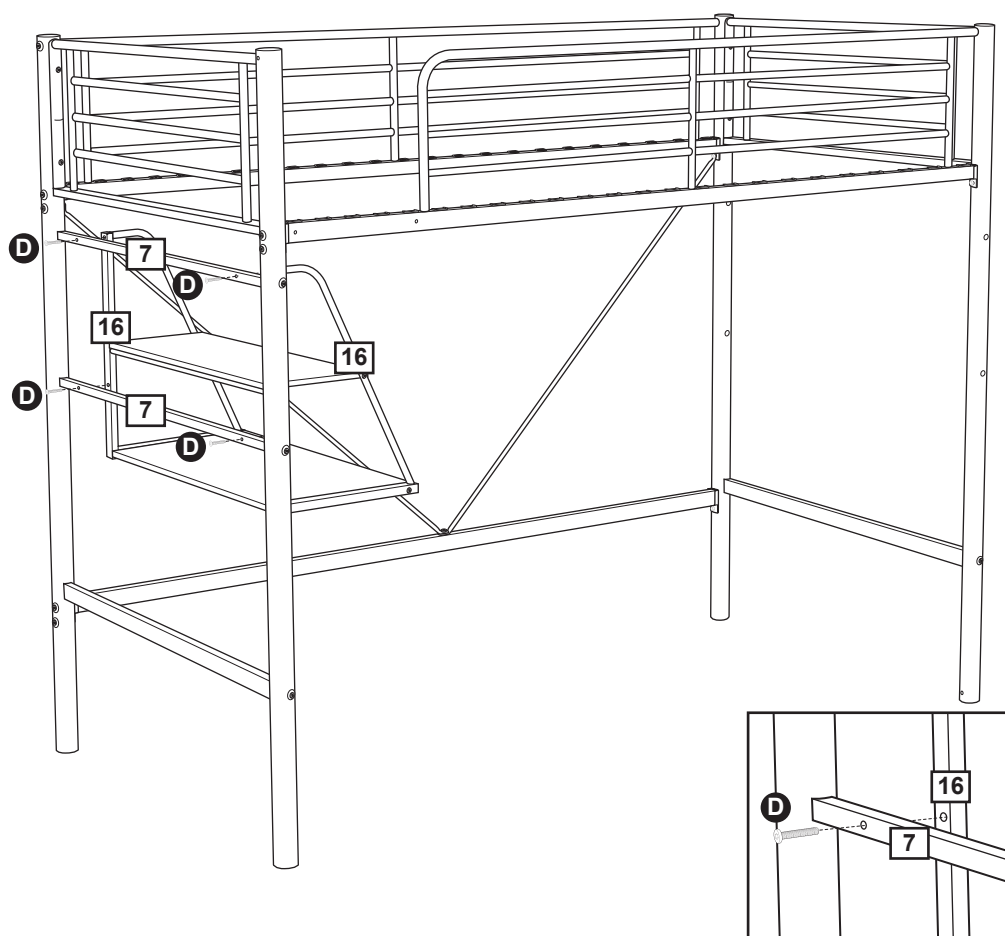


Step 6

Attaching slats

a: With the help of an assistant, line up the slats **11** onto upper rails **9** and **10**. Push firmly down to lock it into position. Check that they cannot be removed by slightly pulling upwards.

b: Extend the end of the webbing on the slats **11** and secure to bottom edge of side safety rails **5** using screws **H**. Tighten screws using a crosshead screwdriver.

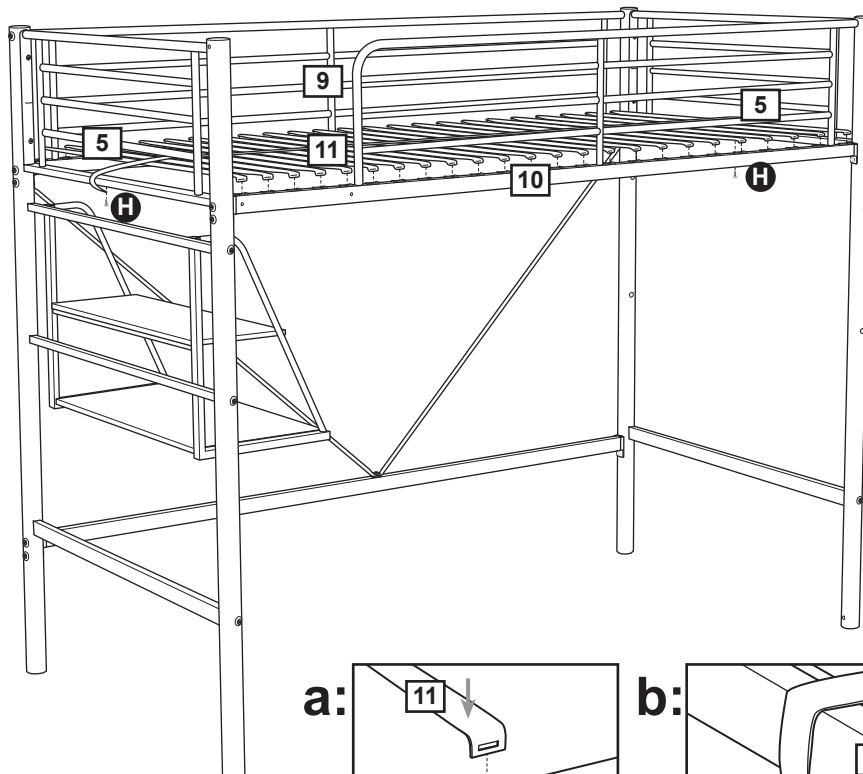

Assembly Instructions


Step 7

Assembling ladder

Referring to diagram, attach the ladder steps **14** to ladder side rails **12** and **13** using bolts **B**, spring washers **N**, curved washers **J** and plastic washers **K**. Tighten all bolts using allen key **Q**.





Note: Identify and correctly position the ladder side rails **12** and **13** by looking for the sticker labels pasted on the rails.

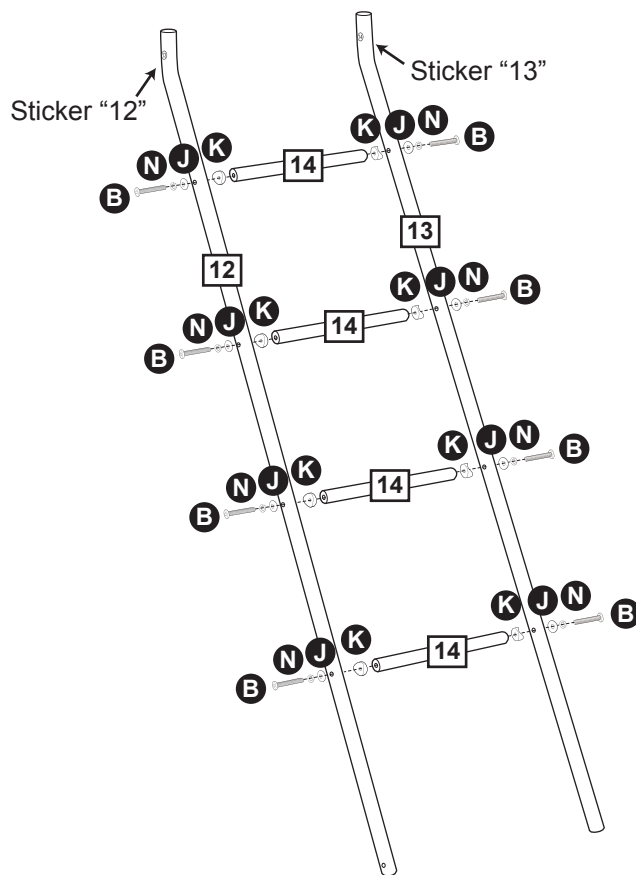

Step 8

Attaching ladder

Attach the ladder to the upper front safety rail **10** using bolts **C** as shown. Tighten bolts using allen key **Q**.

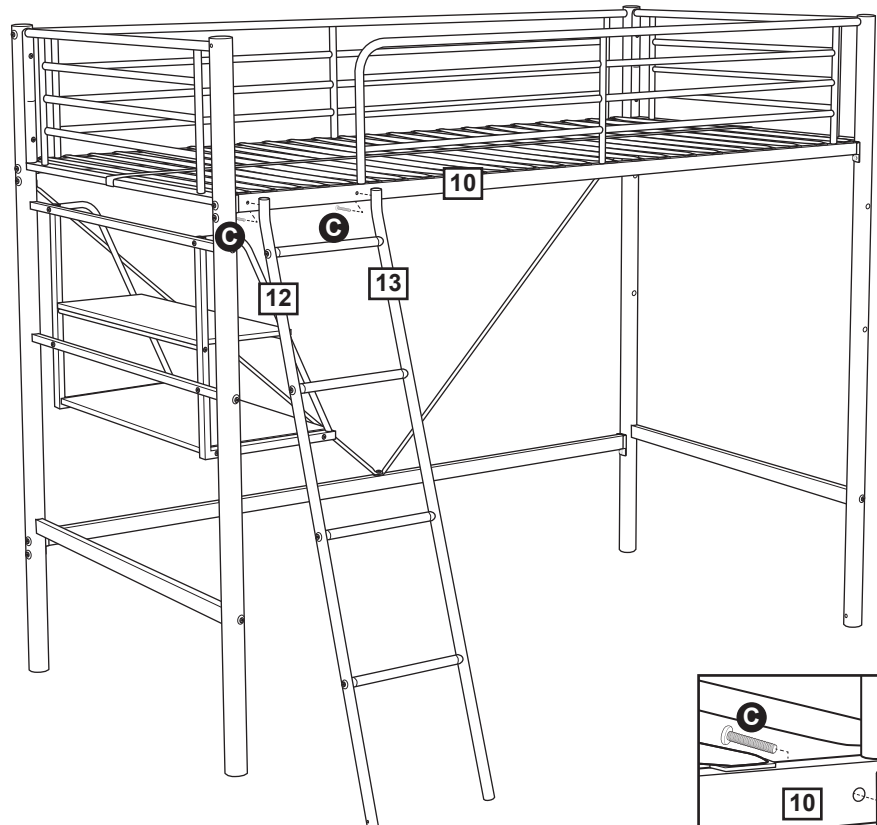


Assembly Instructions

Step 9

Securing the ladder

Attach the ladder brace **15** to ladder side rail **12** and front right-hand post **4** using bolts **E**. Tighten bolts using allen key **Q**.

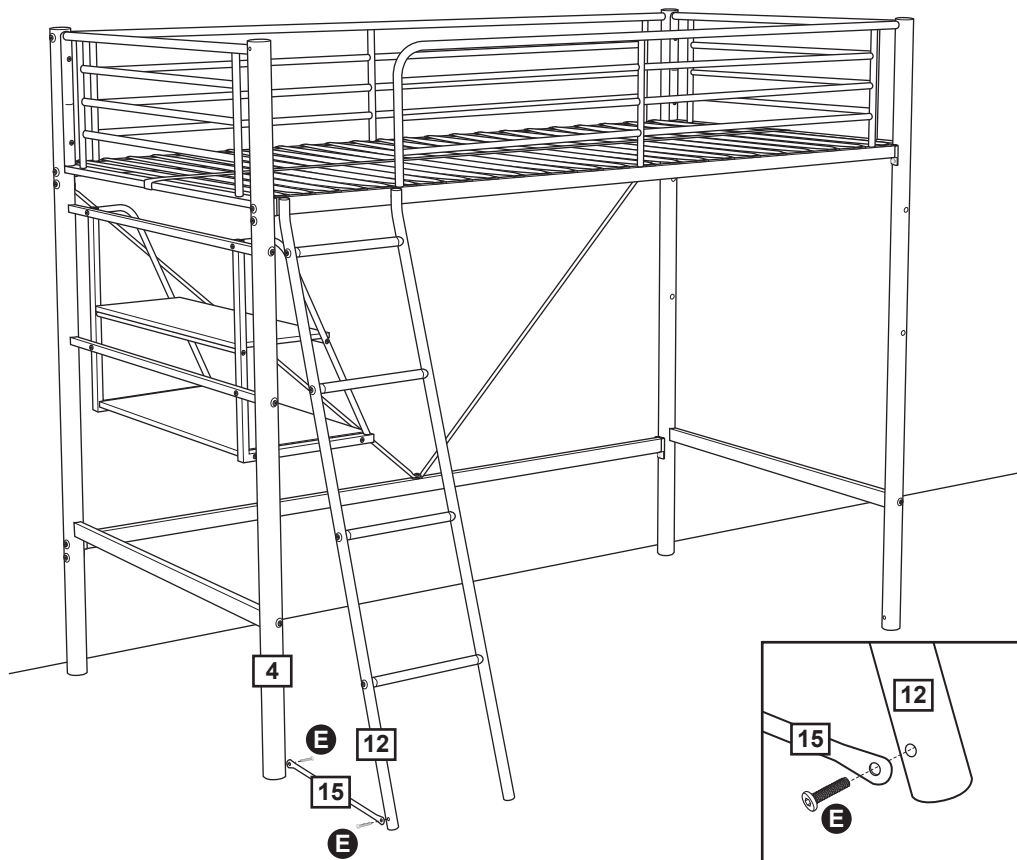

Step 10

Fixing to wall

This unit must be fixed to a wall.


Move the bunk bed into position on the wall. Position the wall strap **L** to the top post of upper back safety rail **9** to mark fixing holes on the wall. Remove the wall strap then drill holes and insert appropriate wall plugs. Reposition wall strap **L** and fix using appropriate screws.



Warning:

Before drilling, check wall for hidden pipes and cables. Consult a qualified specialist if unsure.

Assembly is complete.

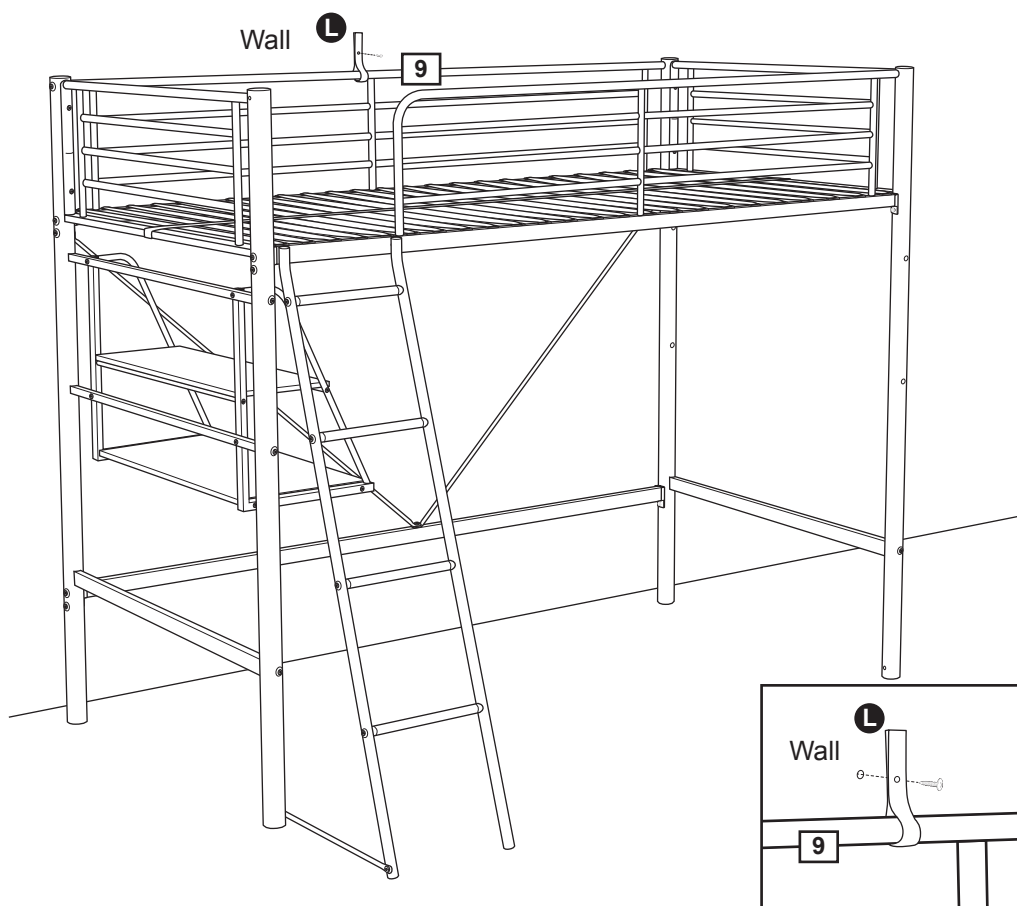

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**