
Canterbury 3 DR 3 DRW MIR ROBE

Assembly Instructions - Please keep for future reference

483/6469

498/1912

499/9760

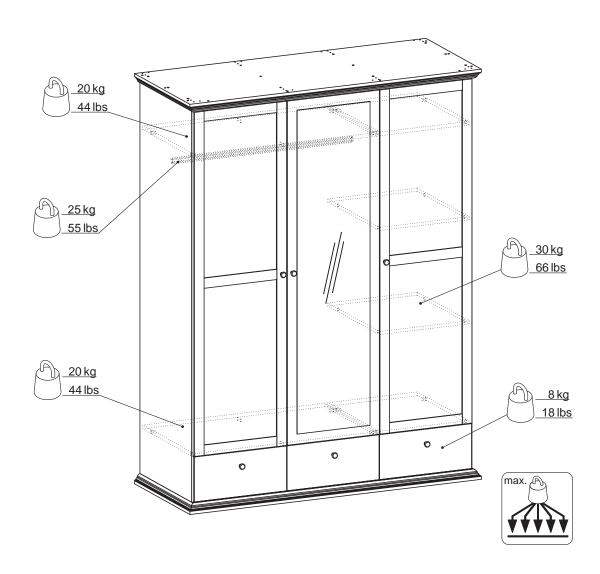

Dimensions

Width - 152.8cm

Depth - 62.7cm

Height - 202.1cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: Argos = 0345 6400800**



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to lay out the parts before starting.

- During assembly, do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drivers for inserting screws, as this could damage

the unit. Only use hand screw drivers.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste.
 Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightend properly.

Safety


 The provided tip-over restraint must be installed in order to optimize user safety.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components, call the **Customer Helpline: Argos = 0345 6400800**


Please check you have all the panels listed below

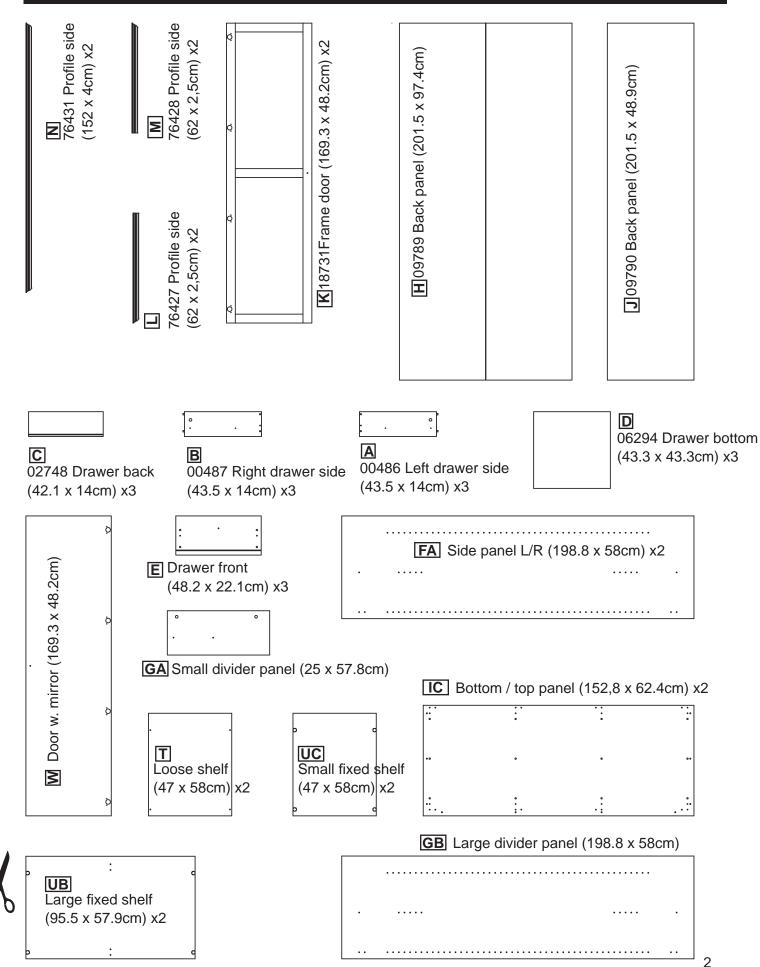


Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

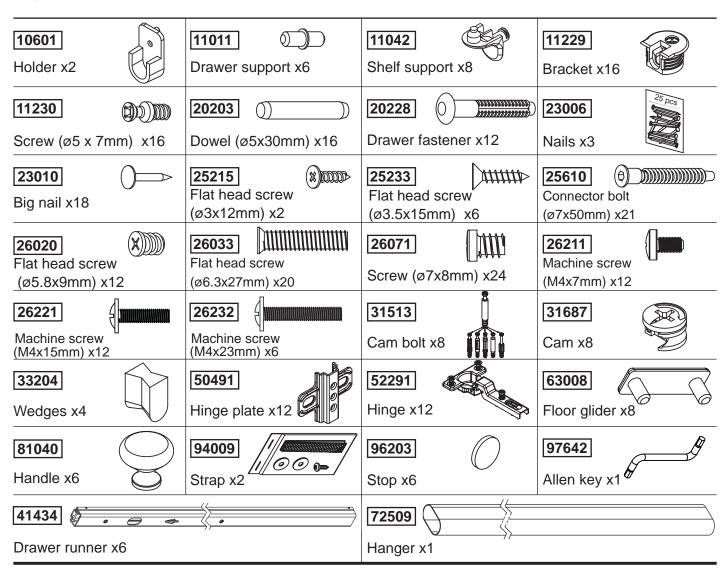

Tools required

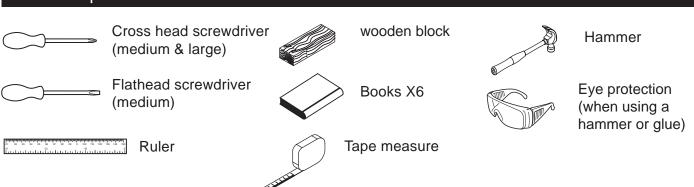

Ruler - Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170

Step 1


Insert dowles

Insert dowels 20203 into outer holes on the ends of panel **FA** + **GB**

Place cam 31687 into the holes on top of small divider panel GA.

Arrow facing the edge of the panel.


Fittings you will need for this step:

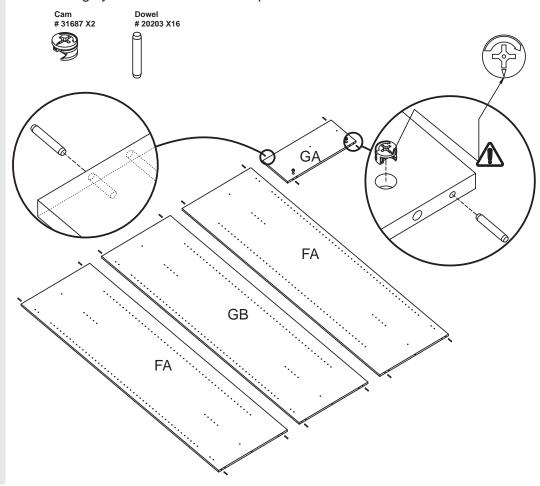

Step 2

Attaching hanger holder

Attach holder 10601 with flat head screw 25215 on side panel FA and divider panel GB.

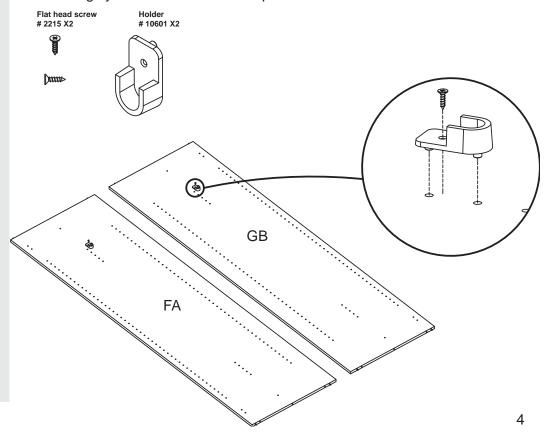


Step 3

Attaching hinge plate


Fixing each hingplate 50491 with screw 2x[26071].

Insert machine screw **26211** in center of hinge plate.

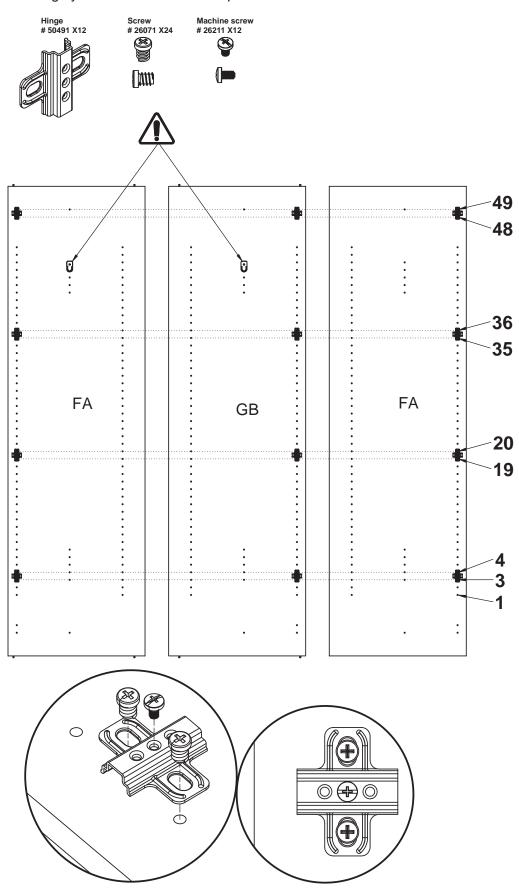

Step 4

Attach screw 11230 as shown.

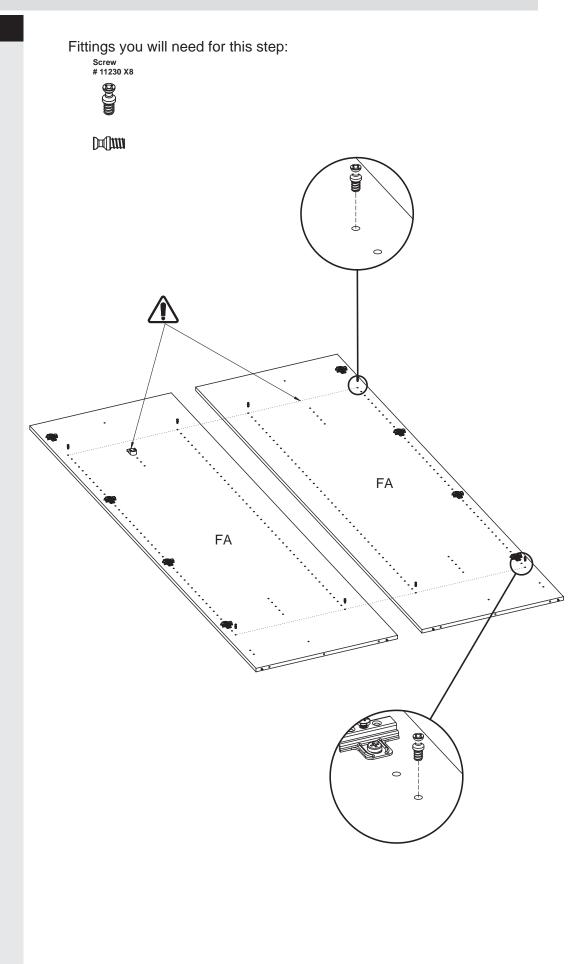

Step 5

Place drawer runners

1.

Extend drawer glide 41434 .

2.

Attach drawer glide at the front of side panel **FA**.

Place screw 26020 through the correct hole at the front of the drawer glide, into the holes on the side panel FA.

Tighten screw but do not overtighten.

3.

Open slide until 3 holes is visible at back of drawer glide.

4.

Place screw 26020 through the correct holes at the back of the drawer glide, into the holes on the panel FA.


Tighten screw but do not overtighten.

5.

Attach the flat head screw 25233 into the correct holes of the drawer glide, into the side panel FA.

Tighten screw but do not overtighten.

Repeat these **5** steps for the remaining runners.

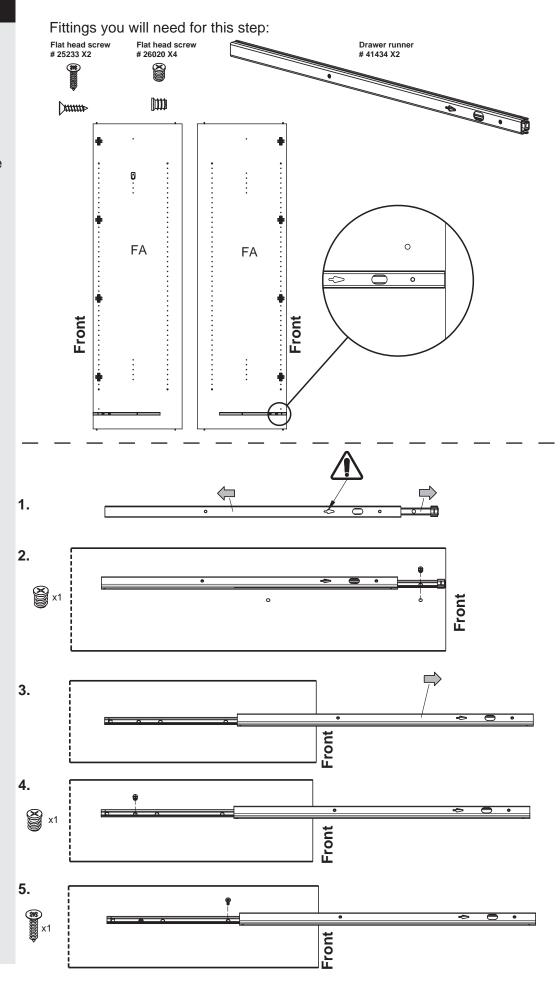


Step 6

Drawer supporter

Attach the screw 11230 on both sides of the large divider panel **GB**.





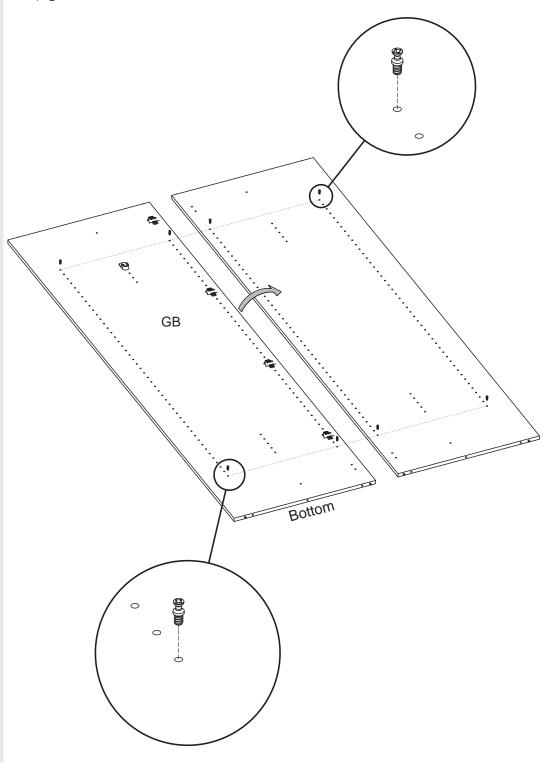

Step 7

Place drawer runners

1.

Extend drawer glide 41434.

2.

Attach drawer glide at the front of small divider panel **GA**.

Place screw 26020 through the correct hole at the front of the drawer glide, into the holes on the small divider panel GA.

Tighten screw but do not overtighten.

3.

Open slide until 3 holes is visible at back of drawer glide.

4.

Place screw 26020 through the correct holes at the back of the drawer glide, into the holes on small divider panel GA.


Tighten screw but do not overtighten.

5.

Attach the flat head screw 25233 into the correct holes of the drawer glide, into the small divider panel GA.

Tighten screw but do not overtighten.

Repeat these **5** steps for the remaining runners on the other side of small divider panel **GA** and on both sides of large divider panel **GB**.

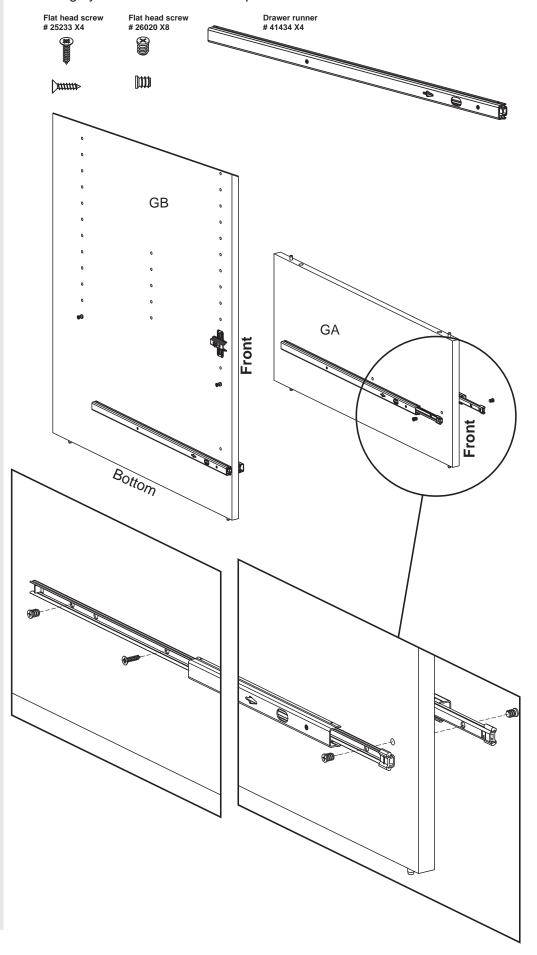


Step 8

Gathering profiles

Insert wedges 33204 into slots on the angle ends of side and front profiles L + N+M.

Use a hammer.

Fittings you will need for this step:

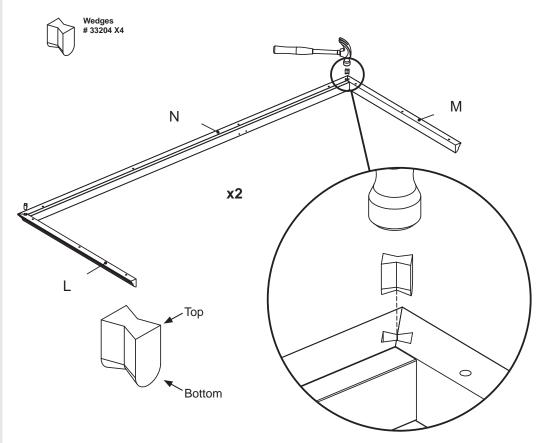


Step 9

Attaching panels

Attach the gathering profiles as shown.

Place bottom **IC** as shown, insert flat head screw **26033**.

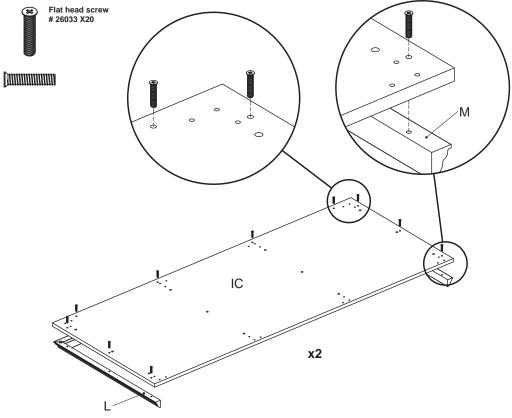


Step 10

Place brackets

Place the bracket 11229 in the fixed shelf UB and UC.

Fittings you will need for this step:

Bracket # 11229 X16

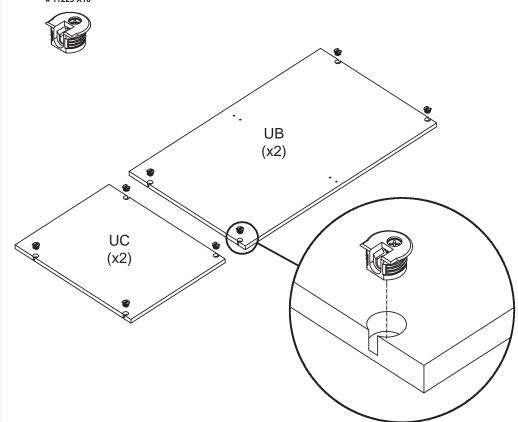


Step 11


Insert cam bolt

Insert the cam bolts

[31513] into the fixed shelf panel UB.

Cam bolts must be screwed down flush.



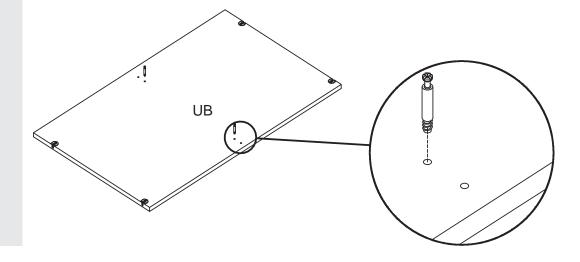

Step 12


Attaching top and bottom panel

Lay down the cabinet facing the front to the floor. Using books supplying side panels.

Attach the top and bottom panel **C** by inserting connector bolt **25610** into the holes.

Tighten the screws with the allen key **97642**.

Using books, supporting side panels and divider panel.

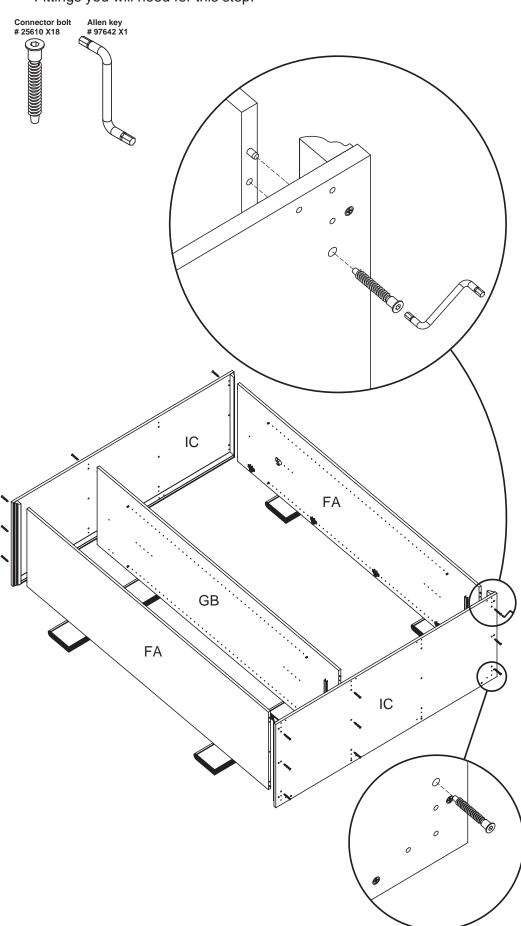


Step 13

Attaching divider panel

Attach the divider panel **GA** by inserting dowel pins and cam bolts into the holes.

Tighten the cams.

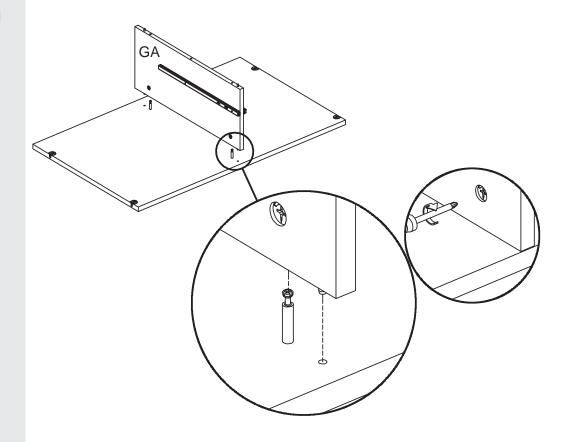


Step 14

Attaching shelf

Place shelf **UB** as picture and slide down over screw.

Then tighten.

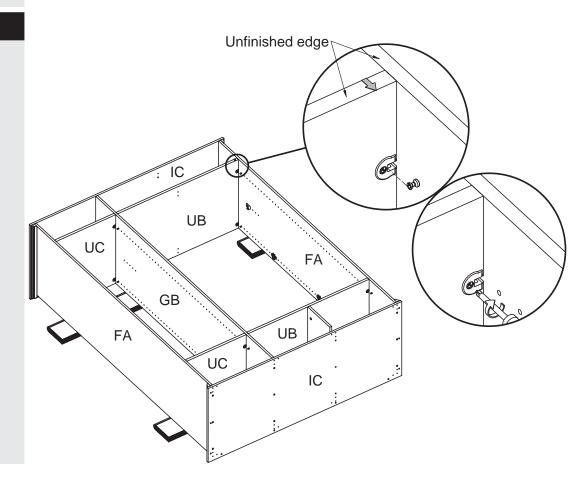


Step 15

Attaching divider panel

Attach the divider panel GA by inserting connector bolt 25610 into the holes of bottom panel IC.

Tighten the connector bolt with the allen key. Fittings you will need for this step:

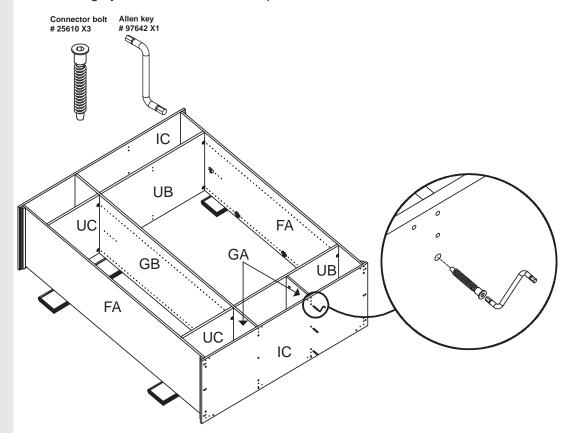


Step 16

Attaching nails

By using a hammer place the big nails 23010 in center of divider panel GB.

! See warning with gap between nail and middle panel.

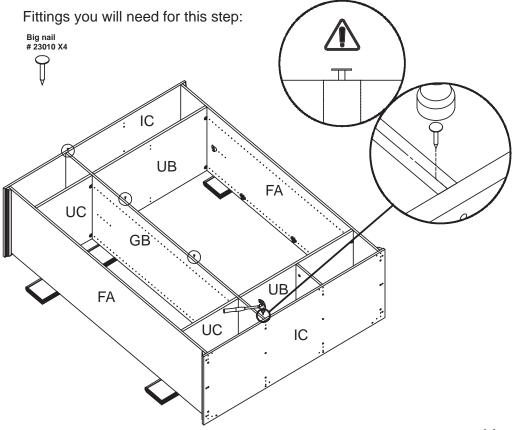

Step 17


Fixing back panel

Slide the back panels **J** and **H** as shown, so that they meet in the center of panel **GB**

Fix the back panels with nails **23006** and **23010**.

Using nails **23006** to fix back panel.


Important:
The unit **MUST** be square when the back is attached.

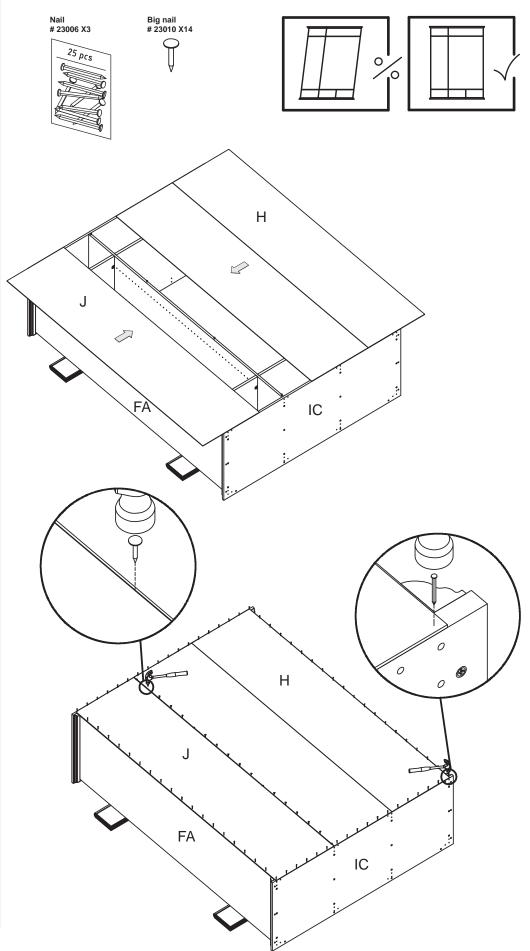

Step 18

Attaching back panels

Place the floor gliders 63008 in the holes of bottom panel IA. Use a wooden block between hammer and floor glider.

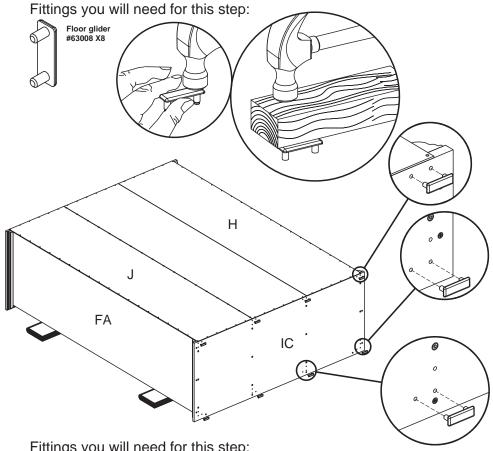


Step 19

Fixing to wall

Fix unit to wall with strap 94009.


The screw supplied together with the anti-topple bracket is to be used only for fixing the anti-topple bracket to the furniture. In addition to this you will need to choose a screw or fitting which is suitable for securing the bracket to the kind of wall you have. If you are unsure about what type of screw to use contact your local hardware store.

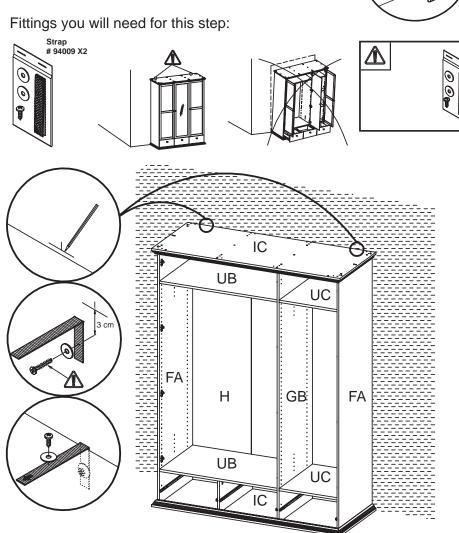

Step 20

Insert hanger

Insert hanger 72509

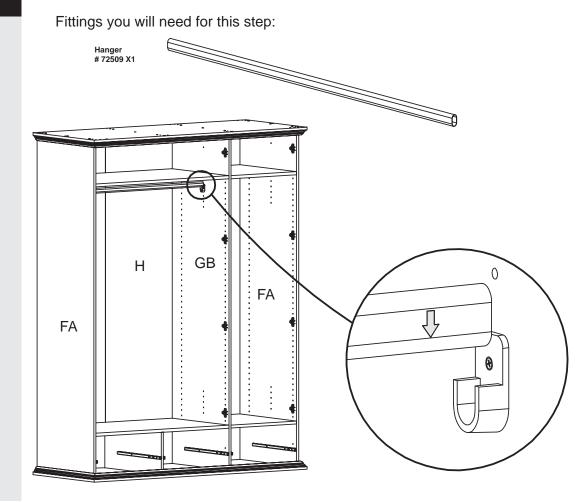


Step 21

Attach the drawer support

Press the shelf support

11042 in holes of side panels **FA**.


Press down the loose shelf panel $\boxed{\mathbf{T}}$ x2.

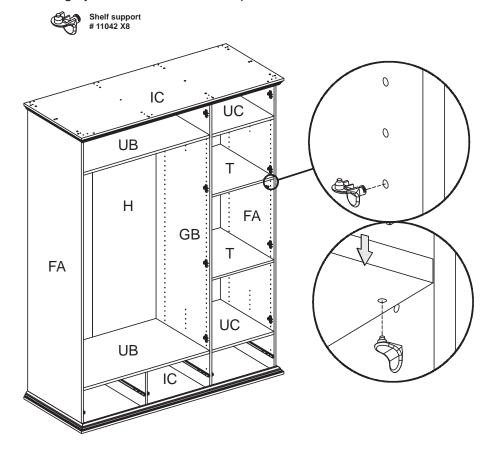

Step 22

Insert stop **96203** on one shelf **UB** and divider panel **GB** .


Fittings you will need for this step:

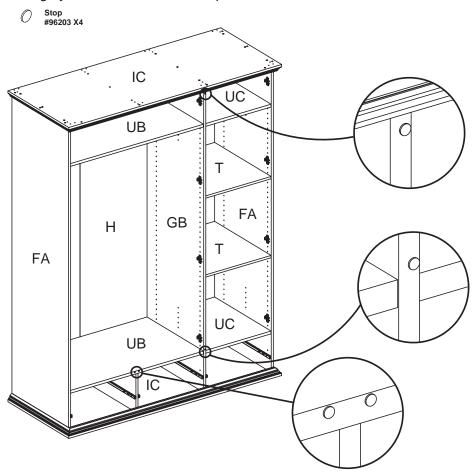

Step 23

Attach hinge

Press hinge **52291** into the large holes on door **W** and **K**. Drive the pre-attached screws into the holes on doors.

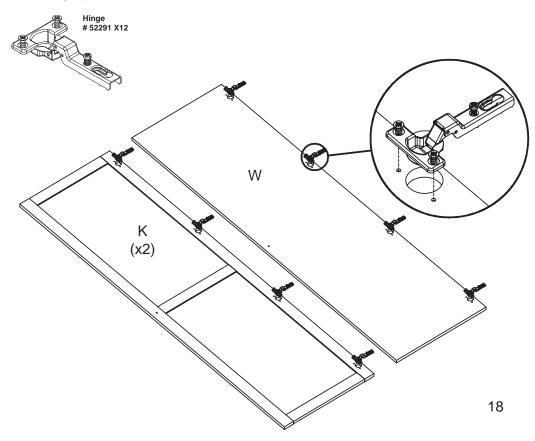


Step 24

Attach frame door

Slide the pivoting part of the two hinges over the hinge plates. Tighten the screw on the hinge plate until the door is supported by the hinges. The door can be adjusted in and out by pulling or pushing the door then retightening this screw

To adjust the door hinges up and down: Loosen the two large screws on the hinge plate to adjust the door up and down, then retighten.


To adjust the doors left or right, rotate the small screw on the hinge in or out.

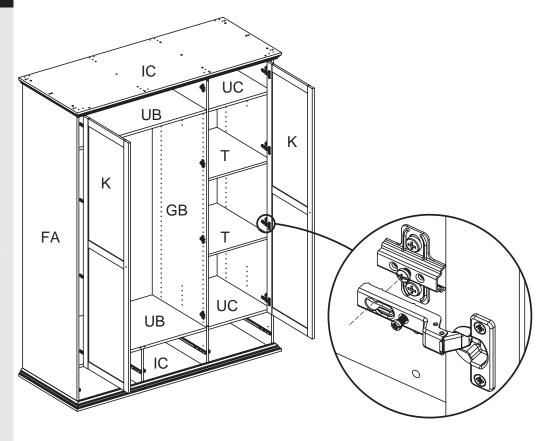

Step 25

Attach door handle

Pass screw 26232 through the door then into the handle 81040 and tighten.

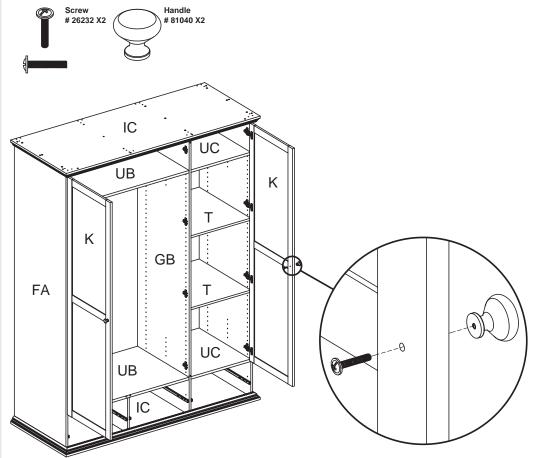


Step 26

Attach mirror door

Slide the pivoting part of the two hinges over the hinge plates. Tighten the screw on the hinge plate until the door is supported by the hinges. The door can be adjusted in and out by pulling or pushing the door then retightening this screw

To adjust the door hinges up and down: Loosen the two large screws on the hinge plate to adjust the door up and down, then retighten.

To adjust the doors left or right, rotate the small screw on the hinge in or out.

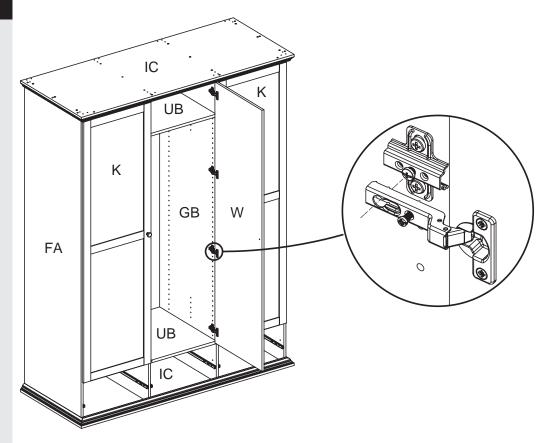


Step 27

Attach door handle

Pass machine screw

26232 through the door then into the handle

81040 and tighten.

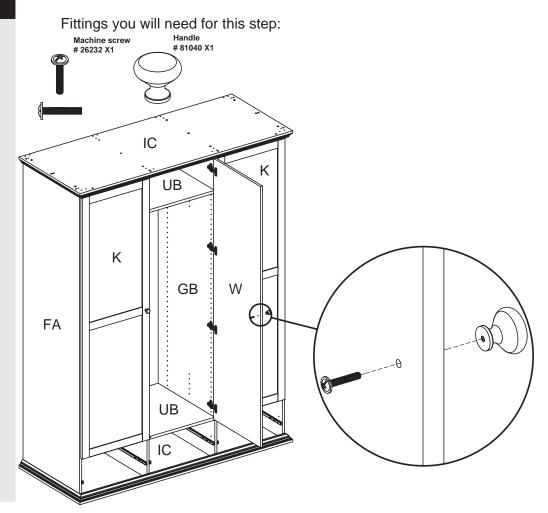

Step 28


Attaching drawers

Attach cam 31687 into the holes in left and right drawer side B + A.

Arrow facing the edge of the panel.

Screw the cam bolt
31513 in the drawer front
E.

Cam bolt must be screwed down flush.

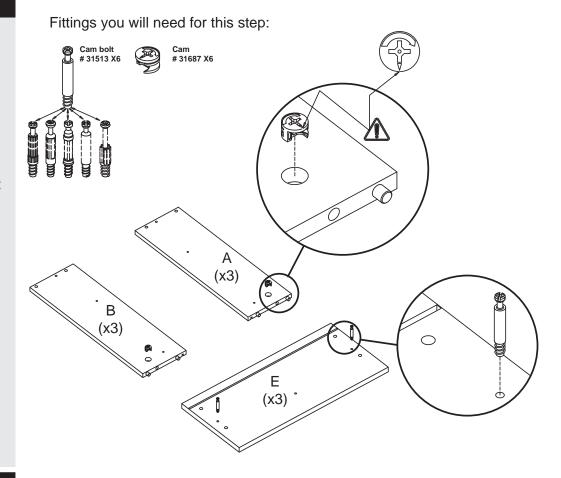


Step 29

Attaching drawer

Align holes at back of the drawer sides **B** + **A** with the holes on the drawer back **C**.

Make sure the groove is facing inside of the drawer.


Tap drawer fasteners **20228** into place with a hammer.

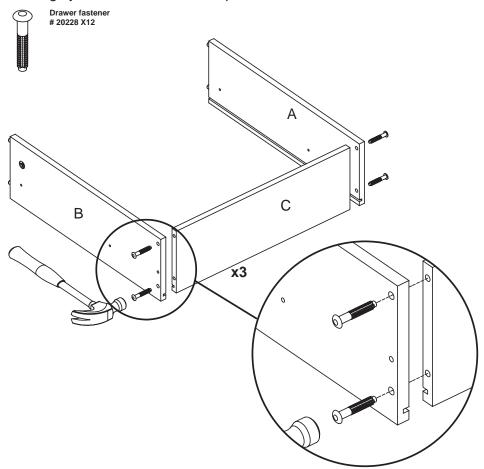

Step 30

Attaching drawer bottom

Press the drawer bottom
D smoothly in the grooves (finished side up).

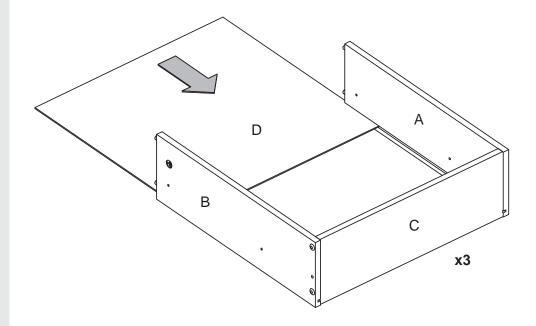


Step 31

Attaching drawer front

Attach the drawer front E by placing dowels and cam bolt in the correct holes. See the detail drawing.


Tighten the cams.

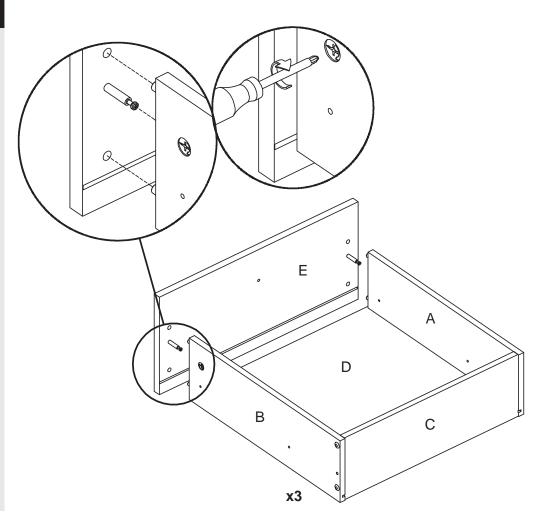

Step 32

Attaching the drawer


Attach the handle **81040** in front of the drawer front **E**. Use machine screw **26232** to tighten the handle.

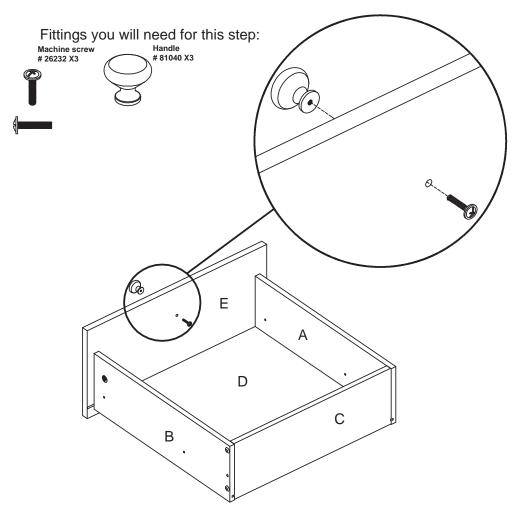

Step 33

Attaching the drawer

Attach the drawer support 11011 into holes on side panel **B** + **A**.

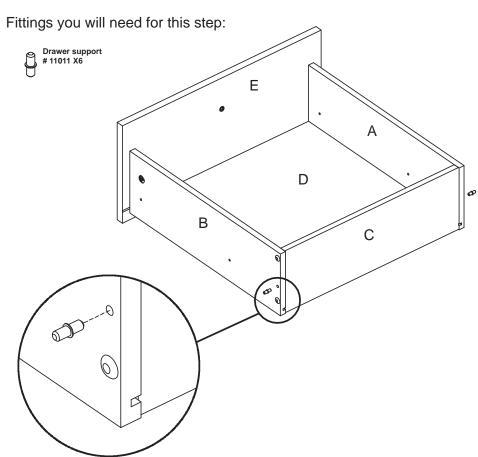


Step 34

Insert stop

Insert stop 96203 on one shelf UB.

Pulling out the runners

Pull out all the runners, before placing drawers.

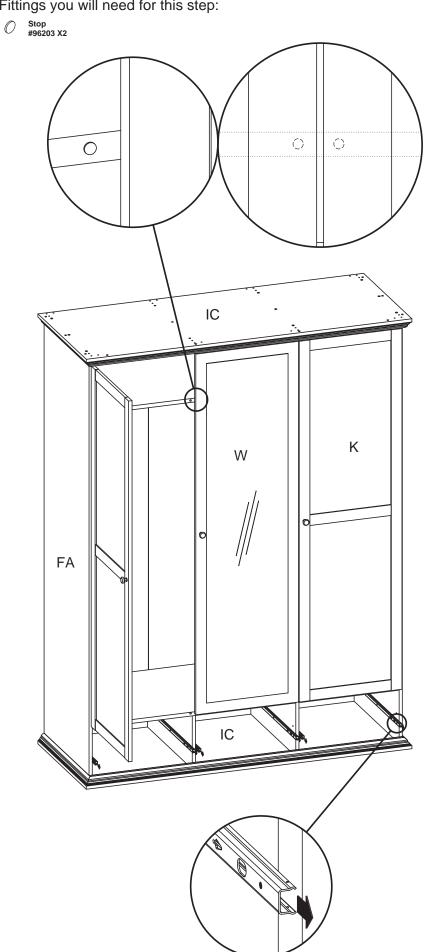

Step 35

Attaching the drawers

1.

Place the drawer between 2 rails.

See picture.

2.

Adjust front of drawer up and down. Tight up and fix drawer to the rail useing machine screw

[26221] from inside the drawer in both sides.


3.


Adjust back of drawer up and down. Tight up and fix drawer to the rail useing machine screw


[26221] from inside the drawer in both sides.


Repeat these step for each of the remaining drawers.

Fittings you will need for this step:

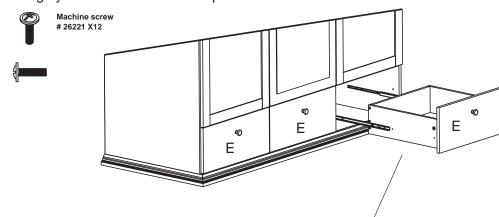

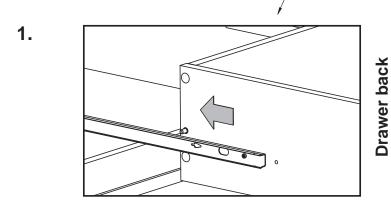

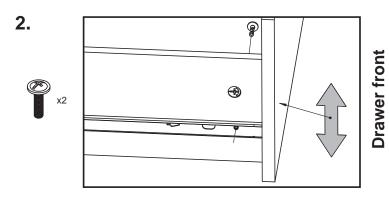

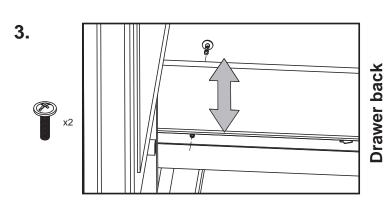

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline**:

Argos = 0345 6400800

