

Maintenance

This fitting is designed for indoor use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish.

Do not use polish or abrasive cleaner - just a soft dry cloth.


BULB REPLACEMENT

- 1. Disconnect the luminaire from the main power supply.
- 2. Allow the bulb to cool down for at least 10 minutes before replacing it.
- 3. Remove the shade or any parts if necessary.
- 4. Never touch the bulb directly with your fingers. Instead, cover it with a cloth.
- 5. Loosen and remove the old bulb from the luminaire.
- 6. Replace with a new bulb that does not exceed the indicated wattage on the fitting. (Max.5W LED G9, bulb not included)
- 7. Reattach the shade or any parts if removed.
- 8. Reconnect the luminaire to the main power supply.

Recycling electrical products

You should now recycle your waste electrical goods and in doing so help the environment. This symbol means an electrical product should not be disposed of with normal household waste. Please ensure it is taken to a suitable facility for disposal.

Visit www.recycle-more.co.uk, click on “bank locator” and enter your postcode to find your nearest recycling site.

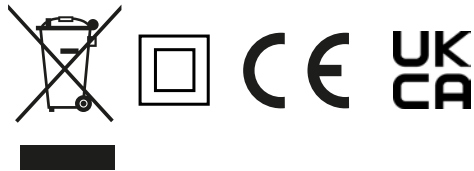


If you require any further assistance, you can contact us on 0345 640 2020 or visit habitat.co.uk/help/contact-us	Made in China Habitat, Argos Limited, London, EC1M 6HA, UK. Argos (N.I.) Ltd. Forestside Shopping Centre, Upper Galwally, Belfast, BT8 6FX, UK.
---	--



Yuno Pleat Arch Wall Light

7273483 & 7713259

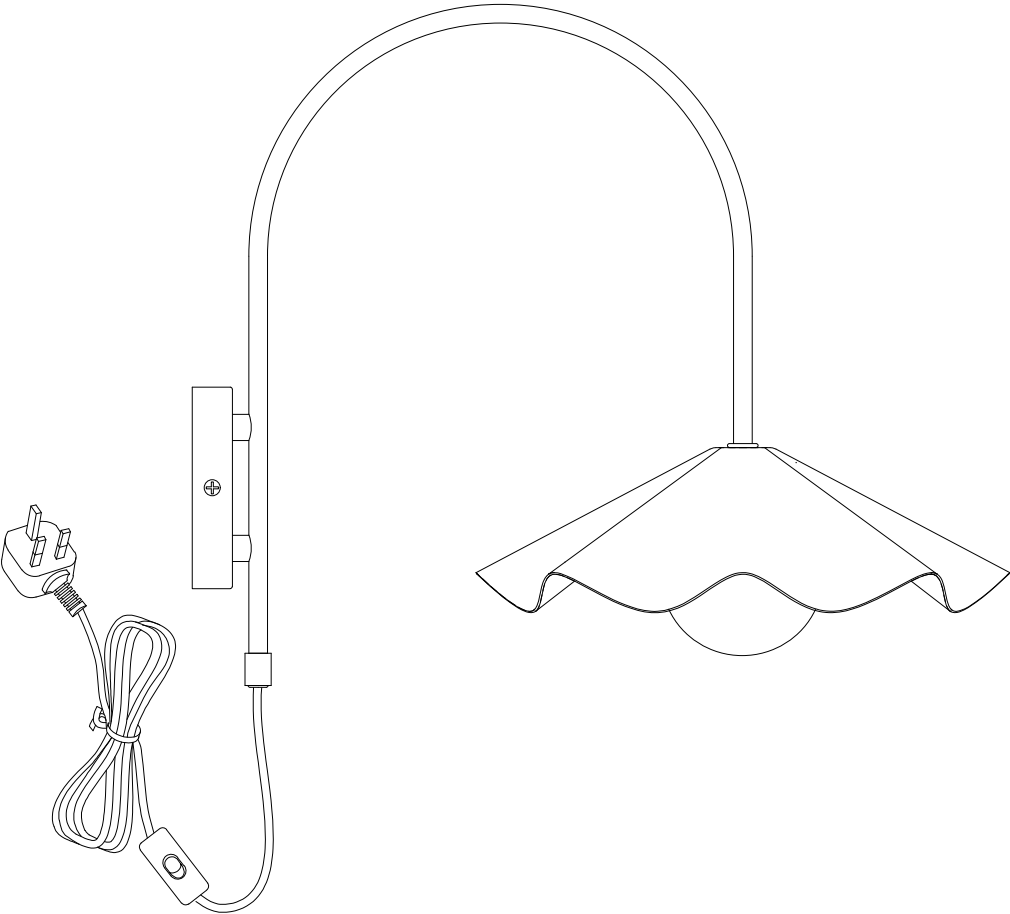

Care & Instruction Manual

For household and indoor use only


Please read and retain these instructions for future reference

Important


- To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- Read these instructions carefully and familiarize yourself with the procedure before assembling the unit.
- Ensure you have enough space to lay out all the parts before assembly.
- Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- To avoid scratching it is recommended that you assemble the unit on a soft level surface.
- When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.
- This luminaire is Class II insulated.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The luminaire is designed for indoor use only.
- Children should be supervised to ensure that they do not play with the unit.
- For compatibility between LED lamps and dimmer switches, please check the manufacturer's specification sheet or compatibility sheet for the LED lamps and the dimmer switch.

Instructions for use

1. Remove the mounting bracket from the fitting by removing the 2 screws. Using the bracket as a template, mark and drill fixing holes into the wall. Ensure the holes are drilled into a joist or other suitable mounting surface and not just into plaster.
 2. Attach mounting bracket to the wall using suitable fixings.
 3. Secure the canopy cup into position using the 2 screws removed earlier.
 4. Attach the cable safety clip to the cable and fix to the wall as shown in the diagrams using suitable fixings for your wall type.
- IMPORTANT - STRANGULATION HAZARD. Children can become entangled in loose cables. Using the provided safety cable clips as shown ensure the cable is fixed flat to the wall with no excess, loose or looped cable.**
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall, cable should be secured to the wall every 30cm with a cable clip and screw.**
5. Fit the bulb: Type and wattage as indicated on the fitting. The wattage indicated must not be exceeded.
 6. Screw in the glass shade onto the lamp holder and secure in place.

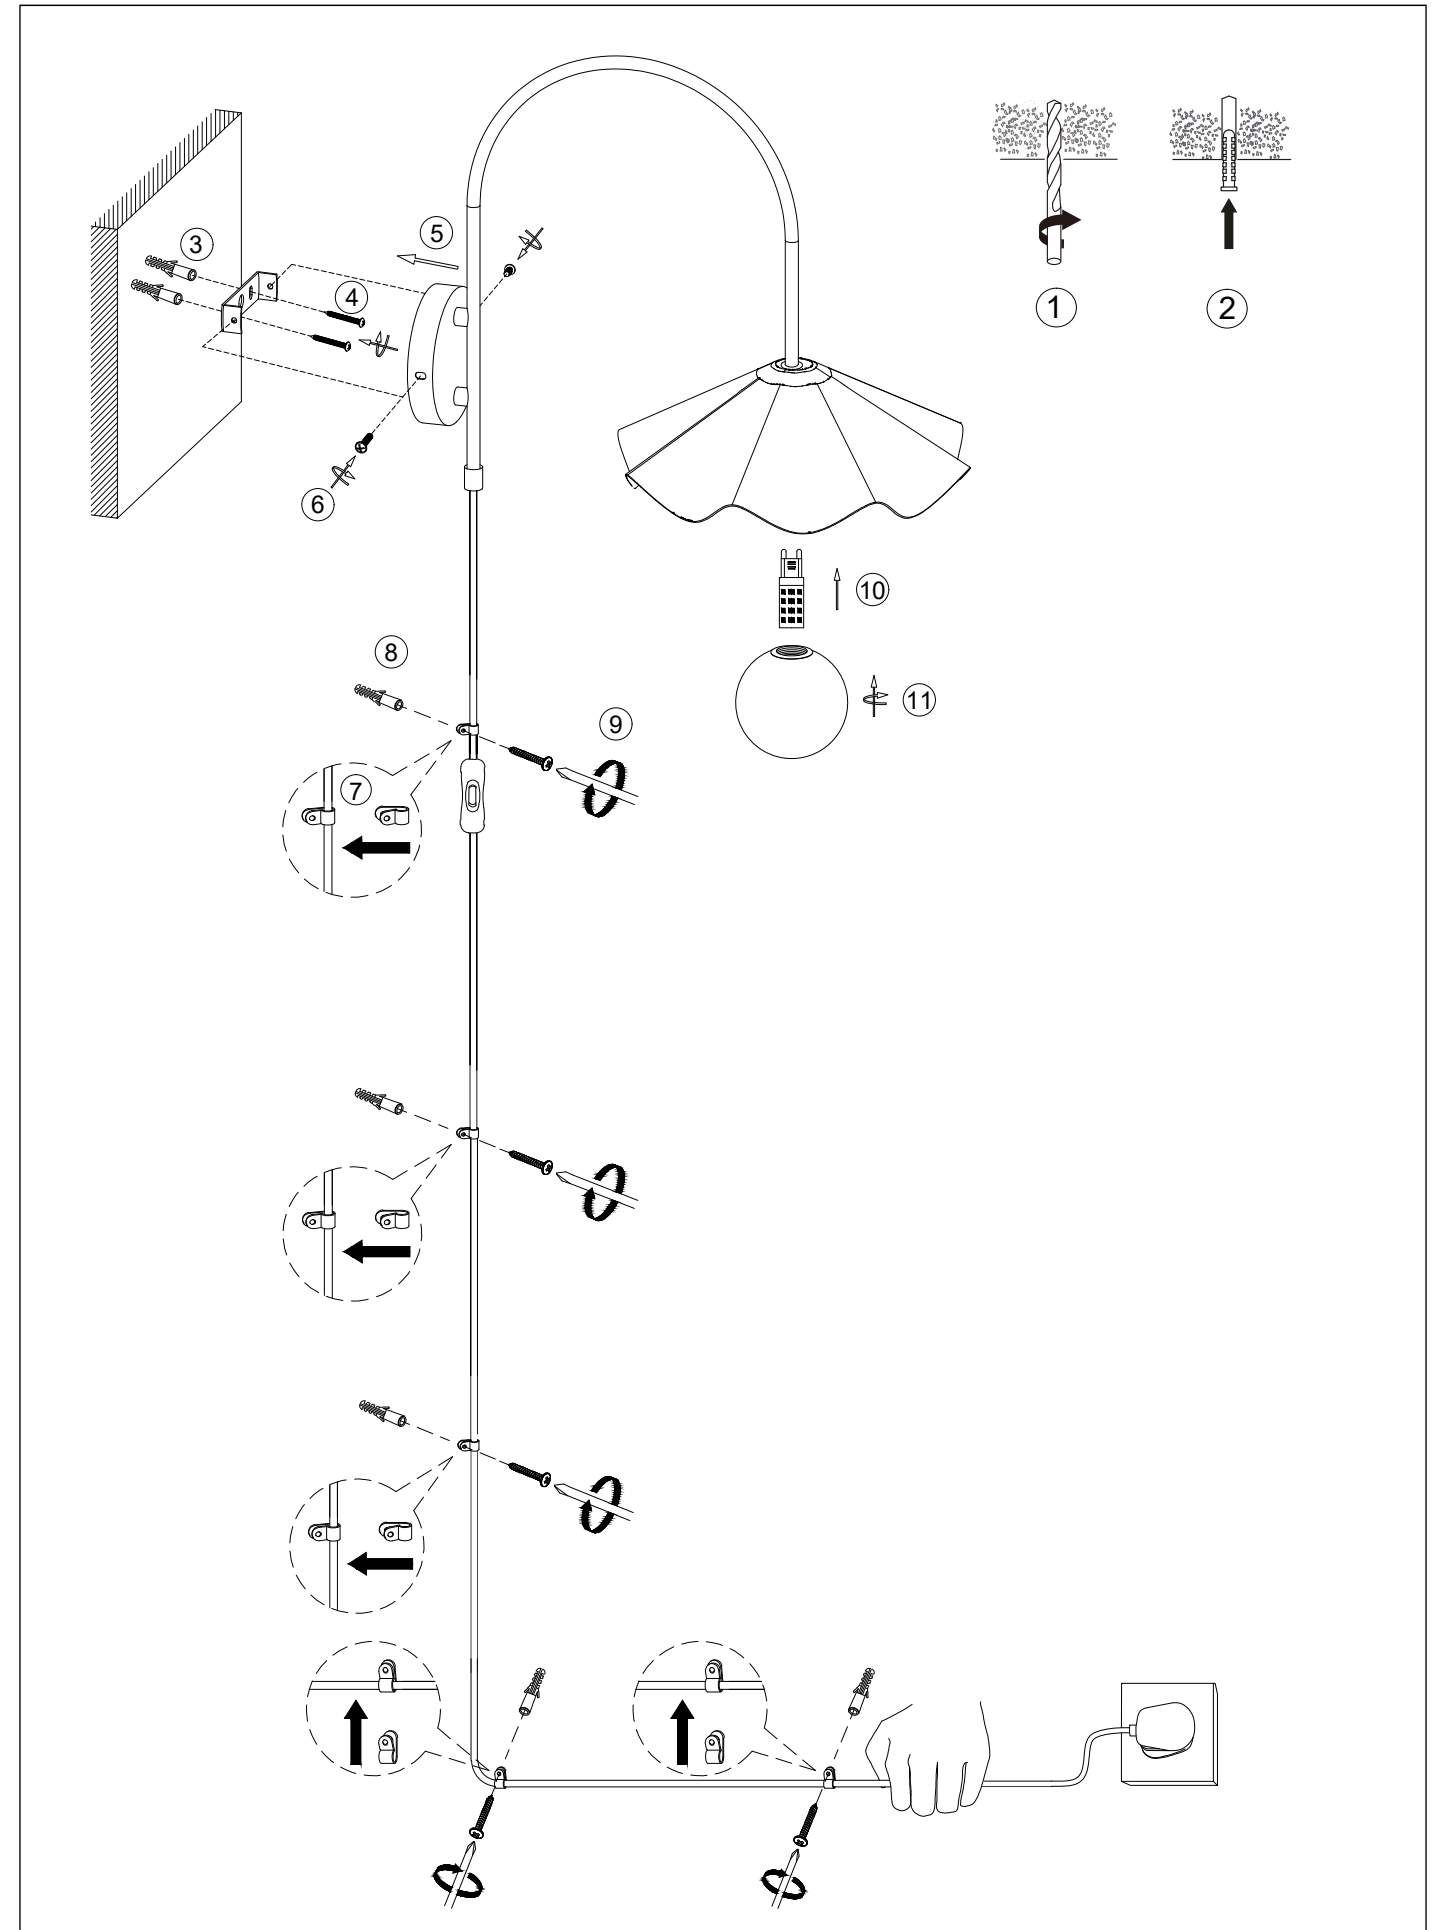

Wall Mounting & Fixings

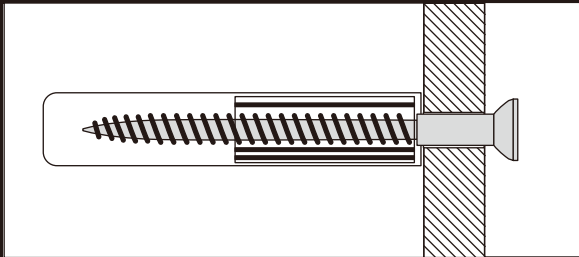

IMPORTANT:

When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


HINTS:

- 1) General Rule  Always use a larger screw and wall plug if you are not sure.
- 2) Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3) Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4) Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
- 5) Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types Of Walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plaster board.

No.1 "Standard" Wall Plug General Wall Materials

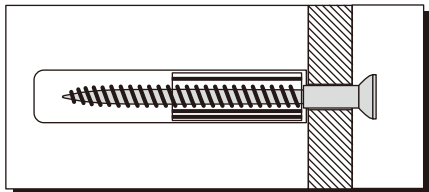


These come in various sizes and are made from plastic or sometimes wood fiber.

No.2 "General Purpose" Wall Plug Aerated / Breeze Block

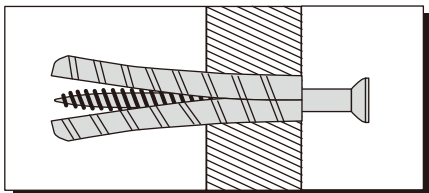


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, a General Purpose Plug can be used.

No.3 "Shield Anchor" Wall Plug Heavy Loads

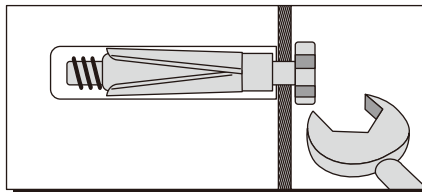


For use with heavier loads such as TV & HiFi Speakers and Satellite Dishes etc.

No.4 "Cavity Fixing" Wall Plug

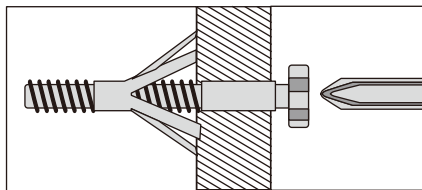


For use with plaster board partitions or hollow wooden doors.

No.5 "Cavity Fixing - Heavy Duty" Wall Plug

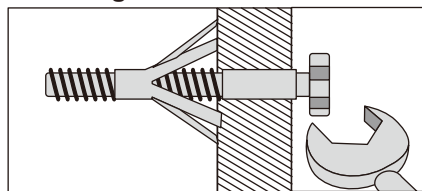

For use when fitting or supporting heavy loads such as shelving, wall cabinets, coat racks.

No.6 "Hammer Fixing" Wall Plug

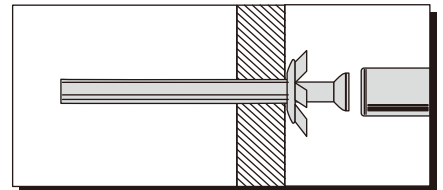

For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall.

CARE & MAINTENANCE

SAFETY

Always check the fitting and location to ensure your safety in and around the home.

FITTING

From time to time check the fitting to ensure the wall plugs or screws do not become loose.