


# Medium Storage Unit

**Assembly Instructions** - Please keep for future reference

833/2471

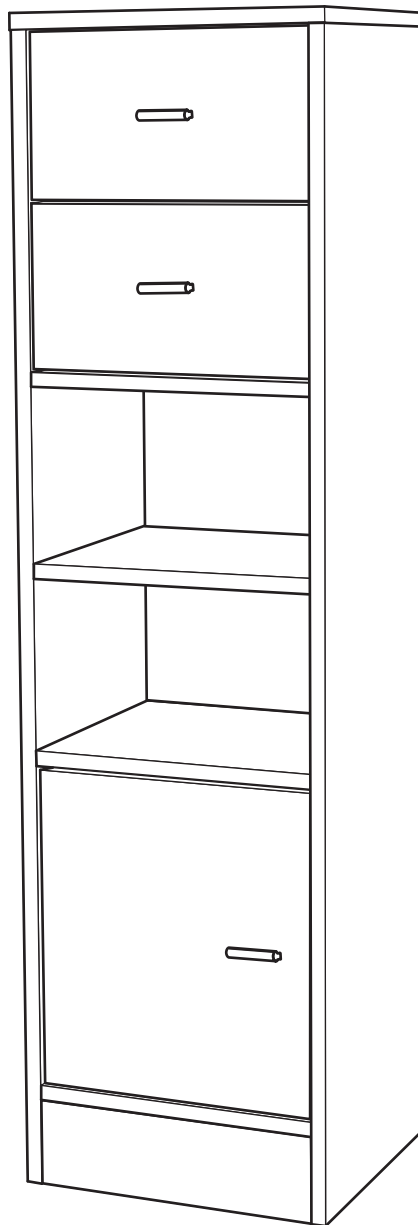

## Dimensions

Width - 32.5cm

Depth - 30.1cm

Height - 119.2cm

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit. Only use hand screwdrivers.

- Dispose of all packaging carefully and responsibly.
- **Note:** Only apply the glue once you are sure of the assembly.

**Glue safety** - Take care when using glue, please follow the advice below

**Skin contact:** Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

**Eye contact:** Rinse immediately with clean water for 15 minutes and seek medical advice.

**If swallowed:** Seek medical advice immediately.

## Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

# Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the panels listed below

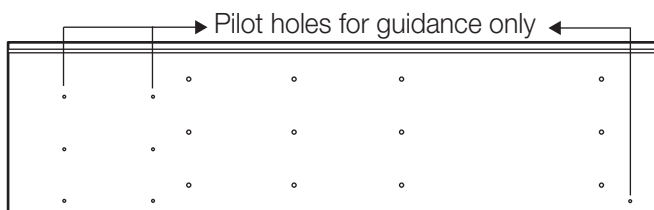


**1** Left side panel (117.6 x 29.9cm)




**9** Back panel (107.9 x 30cm)

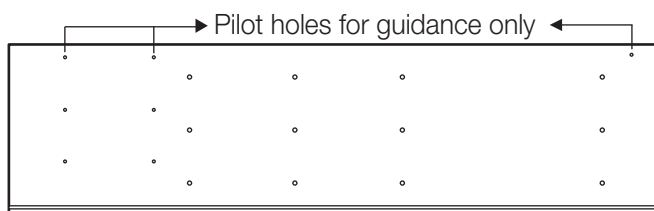


**2** Right side panel (117.6 x 29.9cm)



**10** Drawer right side panel x 2 (26.1 x 11.5cm)




**11** Drawer left side panel x 2 (26.1 x 11.5cm)



**3** Top panel (32.4 x 30cm)




**4** Middle panel x 2 (29.3 x 28.4cm)



**12** Drawer front panel x 2 (28.8 x 16.4cm)



**13** Drawer back panel x 2 (26.1 x 11.5cm)




**5** Bottom panel (29.3 x 29.8cm)



**6** Shelf (29.3 x 28.4cm)



**14** Drawer bottom panel x 2 (27 x 25.7cm)



**7** Door (28.5 x 33cm)

Pilot holes for guidance only

























**8** Front panel (29.3 x 8.8cm)




# Components - Fittings

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel x 16	<b>B</b>  50mm Screw x 12	<b>C</b>  30mm Screw x 14
<b>D</b>  12mm Screw x 1	<b>E</b>  14mm Screw x 9	<b>F</b>  15mm Screw x 2
<b>G</b>  Door stopper x 1	<b>H</b>  Handle x 3	<b>I</b>  Door hinge x 2
<b>J</b>  Hinge plug x 1	<b>K</b>  Screw cover x 12	<b>L</b>  Glue x 1
<b>M</b>  Locking pin x 8	<b>N</b>  Locking nut x 8	<b>O</b>  Plastic support x 4
<b>P</b>  Runner x 4	<b>Q</b>  (This screw is included in the runner bag.) 12mm Screw x 12	<b>R</b>  12mm Screw x 4
<b>S</b>  (This screw is included in the wall strap bag) Wall strap x 1  x 1	<b>T</b>  Wall plug x 1	<b>U</b>  Metal plate x 1

## Tools required



Phillips screwdriver  
(medium & large)




Bradawl  
(or sharp point)



Small  
hammer




Ruler/tape  
measure



Eye protection  
(when using a  
hammer or glue)

## Ruler - Use this ruler to help correctly identify the screws

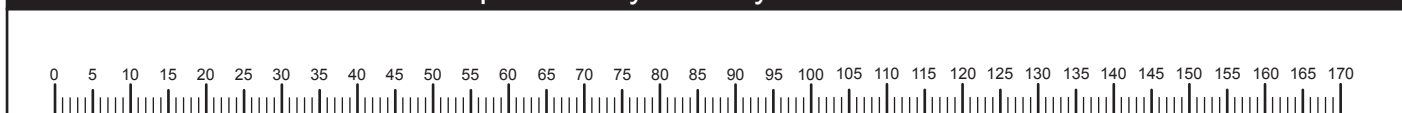

# Assembly Instructions


## Step 1

### Fitting hinges and handle to door

**a:** Use Screw **D** to fix the Metal plate **U** onto the Door **7**.


Insert the Door hinges **I** into the Door **7**.

**a:**

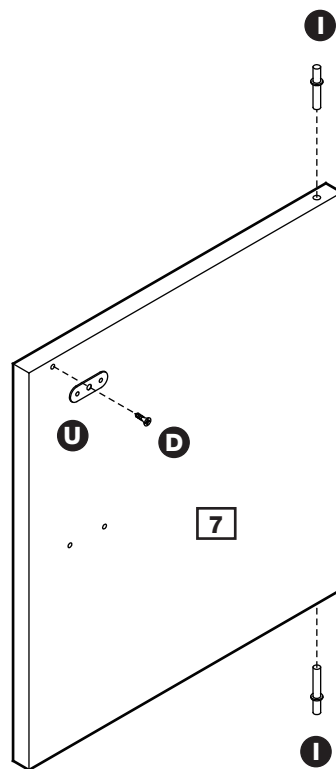

**b:** Use Screws **C** to fix the Handle **H** onto the Door **7**.

**b:**

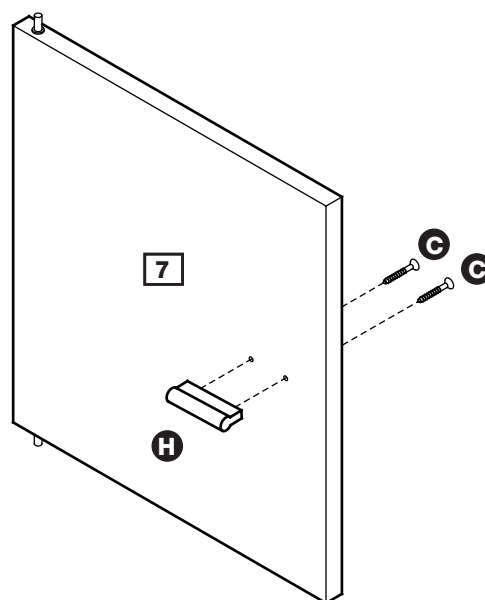

# Assembly Instructions

## Step 2

### Fitting dowels and door stopper






**Caution:** Always check the assembly method is correct before applying glue.

**a:** Use Screws **F** to fix the Door stopper **G** onto the Shelf **6**.



Place a small amount of Glue **L** into the dowel holes. Insert Wooden dowels **A** into the Shelf **6**.

**a:**

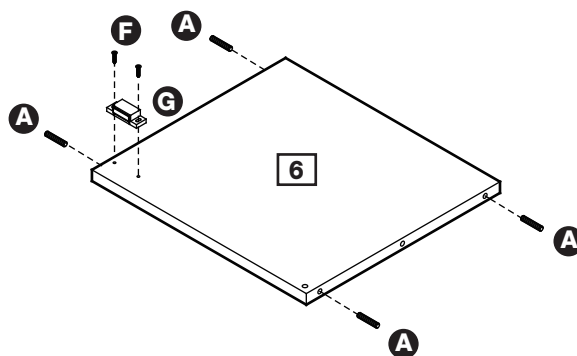

**b:**

**b:** Place a small amount of Glue **L** into the dowel holes. Insert Wooden dowels **A** into the Middle panels **4**.

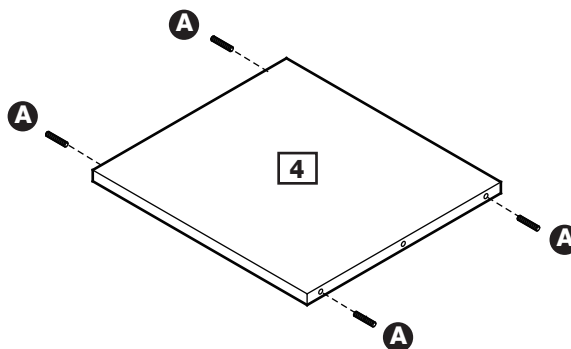

**X 2**


# Assembly Instructions

## Step 3

### Fitting the bottom panel


**a:** Place a small amount of Glue **L** into the dowel holes. Insert Wooden dowels **A** into the Bottom panel **5**.

Insert Hinge plug **J** into the Bottom panel **5**.

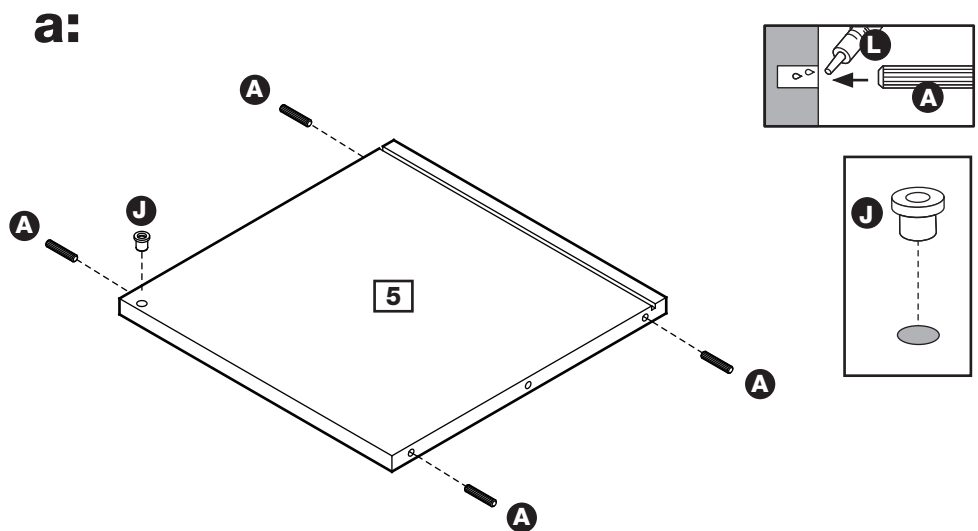


**b:** Use Screws **E** to fix the Plastic supports **O** onto the Front panel **8**.

**b:**

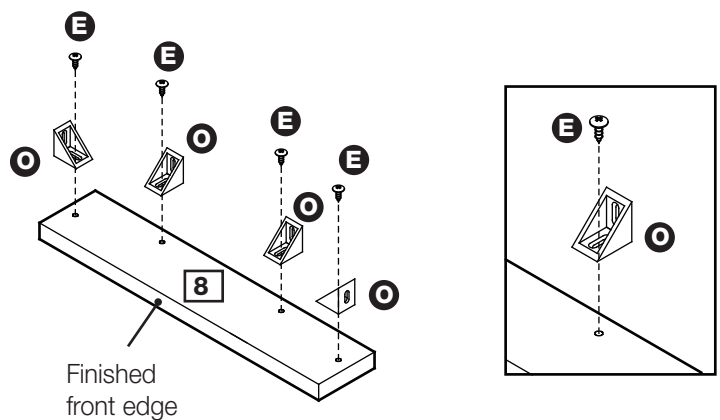

**c:** Use Screws **E** to fix the Front panel **8** onto the Bottom panel **5**.

**c:**

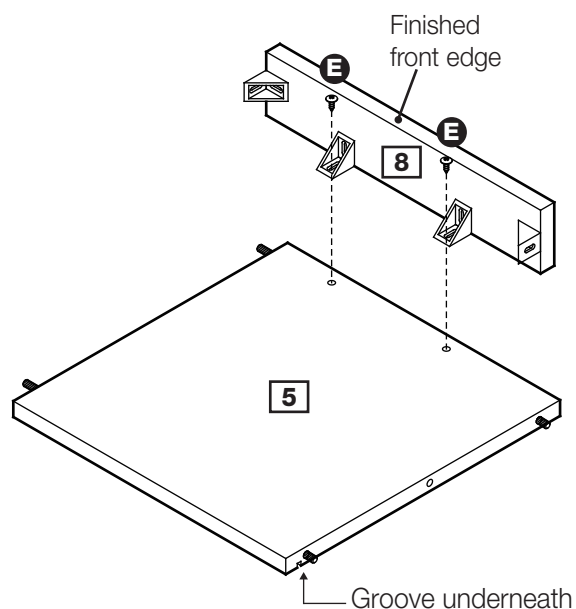

# Assembly Instructions

## Step 4

### Attaching runners


**a:** Position the Runners **P** in from front edge of the Right side panel **2**.

Slide top of the runners back.

Use Screws **Q** to fix the Runners **P** on the Right side panel **2**.

**Note:** The front part of the Runner should be approximately 1.7cm from the front edge of the panel.


**a:**

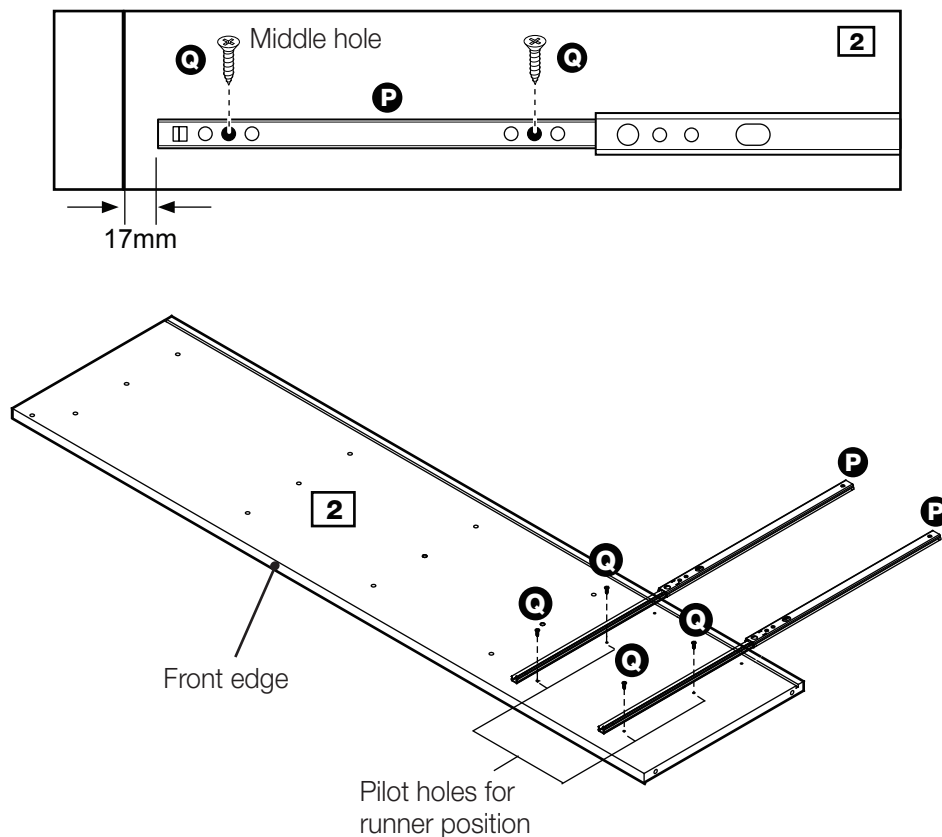

**b:**

**b:** Slide top of the Runners **P** forward.

Use Screws **Q** to fix the Runners **P** on the Right side panel **2**.

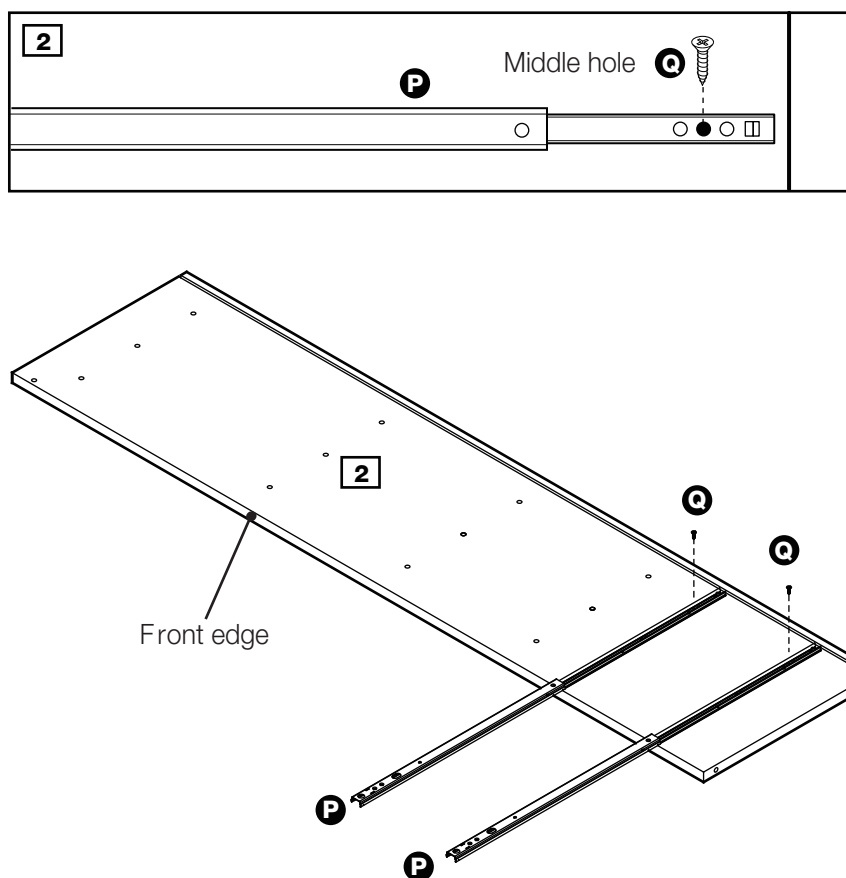

Continued on next page.



# Assembly Instructions


## Step 4 - continued

**c:** Position the Runners **P** in from front edge of the Left side panel **1**.

Slide top of the runners back.


Use Screws **Q** to fix the Runners **P** on the Left side panel **1**.

**Note:** The front part of the Runner should be approximately 1.7cm from the front edge of the panel.

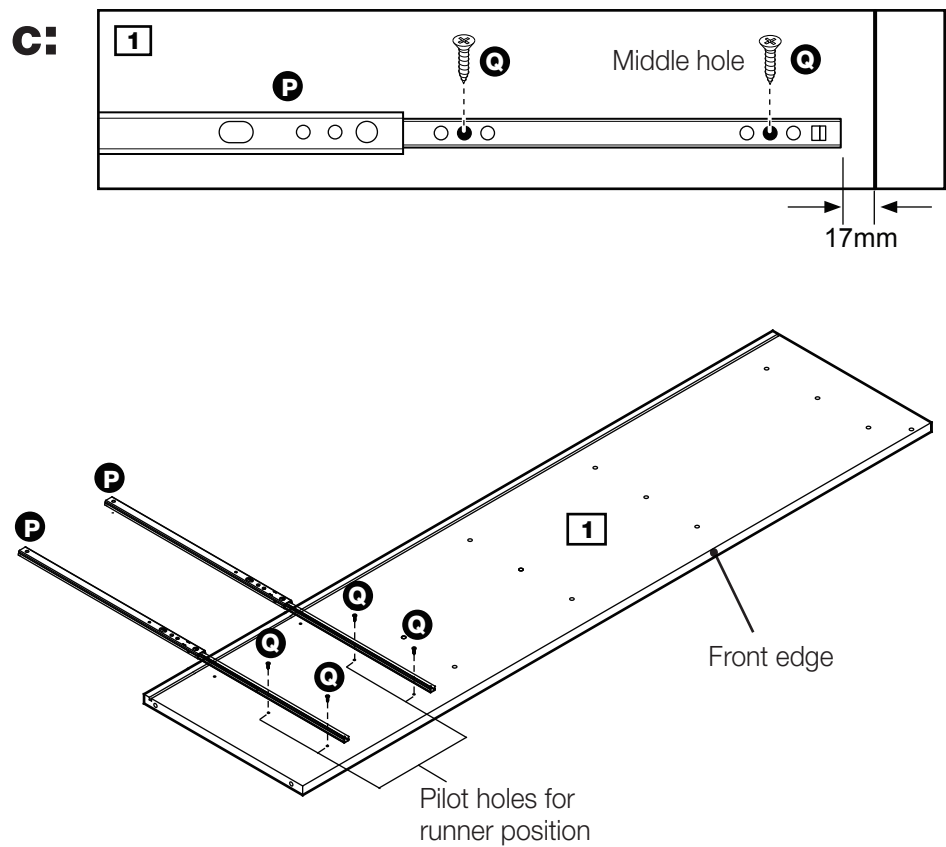

**d:** Slide top of the Runners **P** forward.

Use Screws **Q** to fix the Runners **P** on the Left side panel **1**.

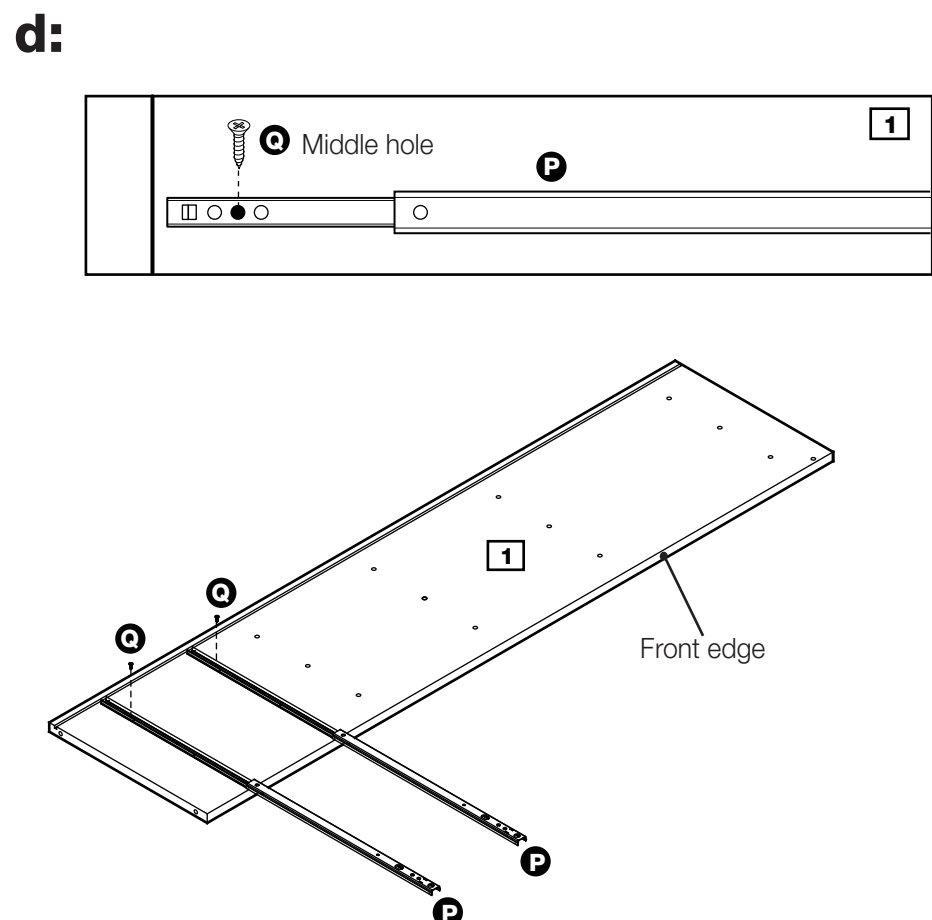

# Assembly Instructions

## Step 5


### Fitting left side panel

**a:** Place a small amount of Glue **L** into the dowel holes. Position Bottom panel **5** onto Left side panel **1** using Screws **B**.

Use Screws **E** to fix the Plastic supports **O** onto the Left side panel **1**.

Use Screw cover **K** to cover the Screw heads.


**a:**

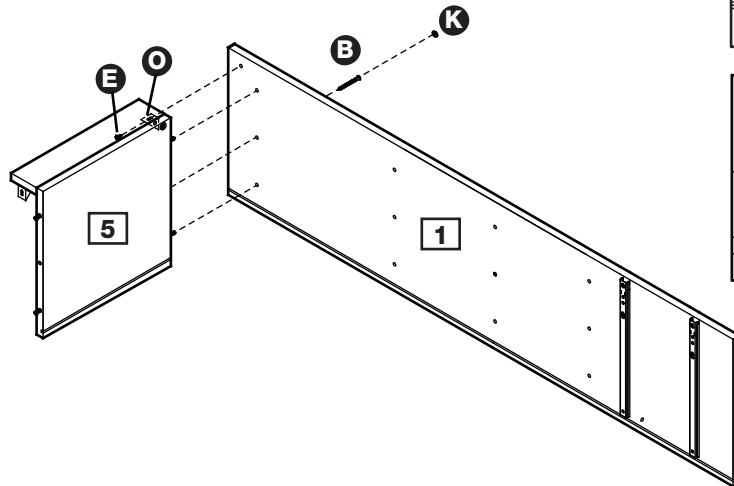

**b:**

**b:** Place a small amount of Glue **L** into the dowel holes.

Position Door **7** onto the unit, locating the hinges into plug on Bottom panel **5** and Shelf **6** and corresponding holes.

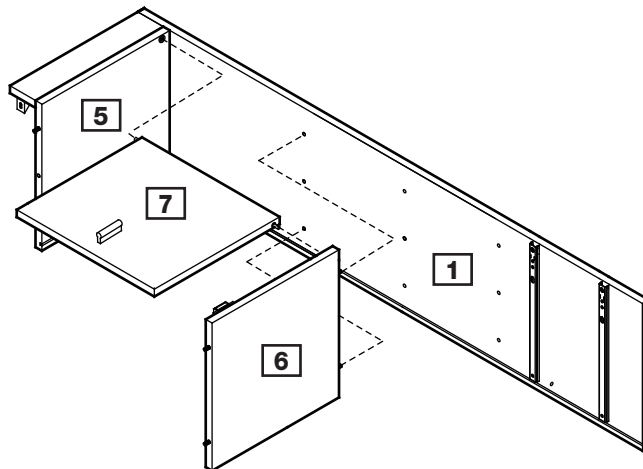


**c:**

**c:** Place a small amount of Glue **L** into the dowel holes.

Position Middle panels **4** & Shelf **6** onto Left side panel **1** using Screws **B**.

Use Screw covers **K** to cover the Screw heads.

Continued on next page.

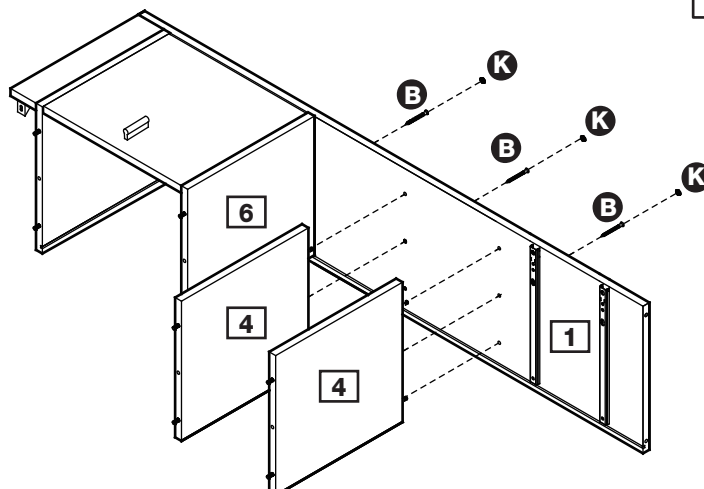



# Assembly Instructions

## Step 6

### Fitting the back panel

**Note:** It would be useful to ask someone to help you at this stage.

Place a small amount of Glue **L** into the groove. Carefully slide the Back panel **9** onto the unit.

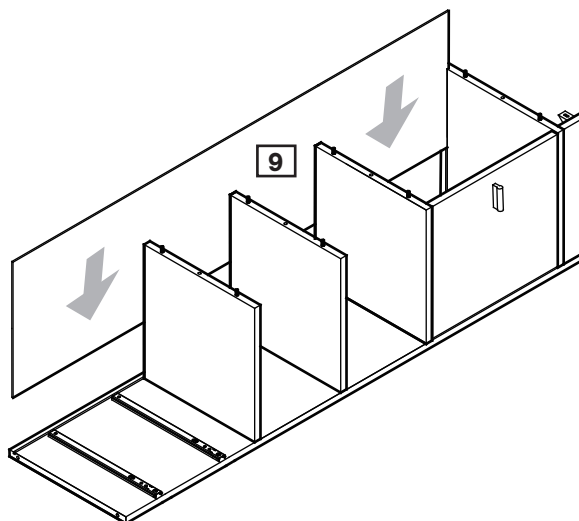





## Step 7

### Fitting the right side panel

Place a small amount of Glue **L** into the dowel holes and groove. Use Screws **B** to fix the Right side panel **2** onto the unit.

Use Screws **E** to fix the Plastic Support **O** onto the Right side panel **2**.

Use Screw covers **K** to cover the Screw heads.

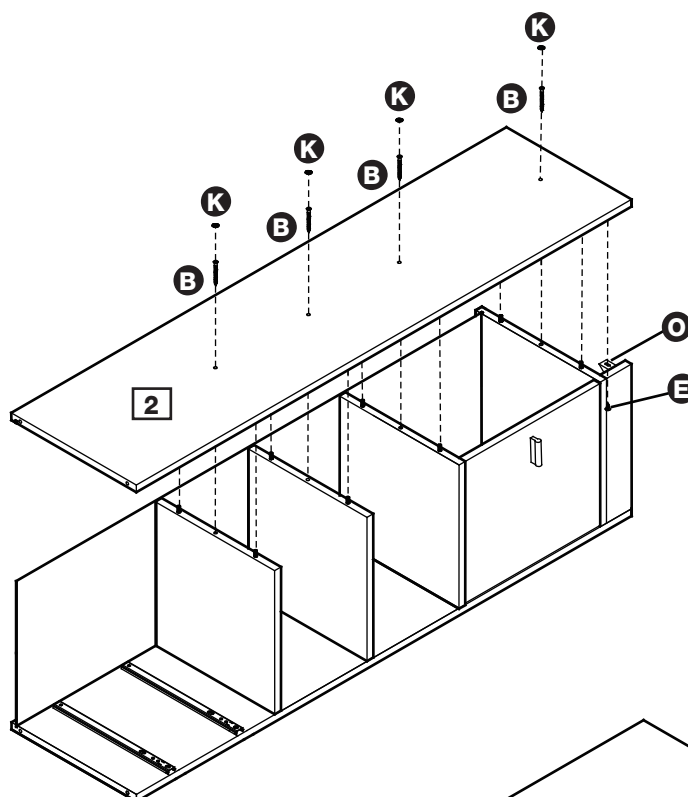



## Step 8

### Fitting the top panel

Place a small amount of Glue **L** into the groove.

Use Screws **B** to fix the Top panel **3** onto the unit.

Use Screw covers **K** to cover the screw heads.

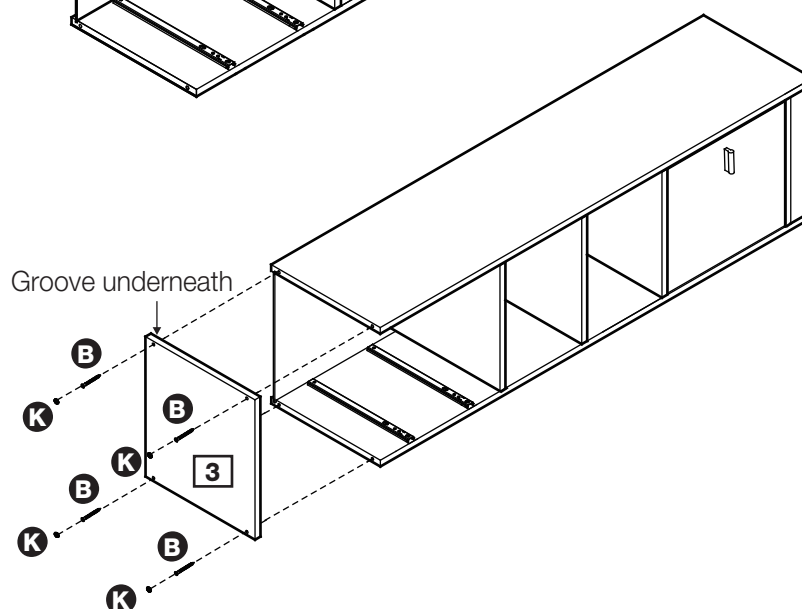


# Assembly Instructions

## Step 9

### Drawer assembly

**a:** Fix Drawer right and left side panels **10** & **11** to Drawer back panel **13** using Screws **C**.



**a:**

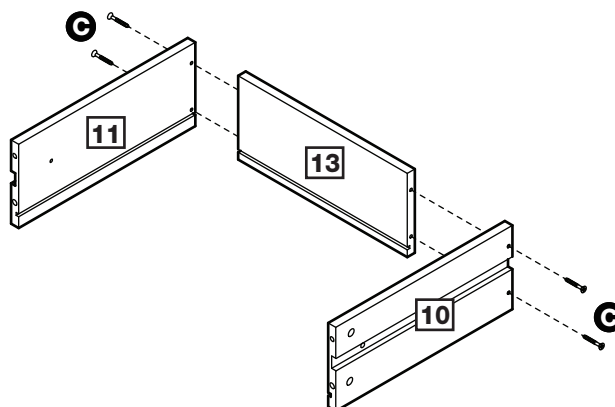

**b:** Place a small amount of Glue **L** into the grooves.

Carefully slide the Drawer bottom panel **14** into the unit.

**b:**


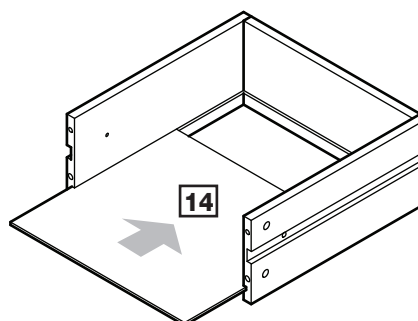


**c:** Screw Locking pins **M** into the Drawer front panel **12**.

**Note:** Insert Locking pins as far as shown.

**Do not over tighten.**

**c:**





**d:** Place a small of Glue **L** into the groove.

Position the Drawer front panel **12** onto the drawer sides.

Ensure the panels fit together without any gaps.

Fix the Handle **H** onto the Drawer front panel **12** using Screws **C**.

**d:**

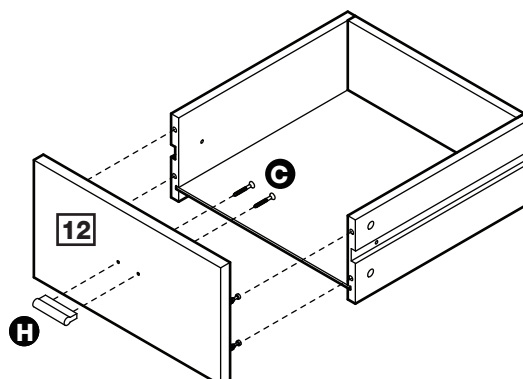

Continued on next page.

# Assembly Instructions



## Step 9 - continued

**e:** Insert 4 Locking nuts **N** into the holes in the drawer sides (they will only insert one way).

Use a screwdriver to turn Locking nuts **N** clockwise to lock.

**Repeat with remaining drawer.**

**e:**

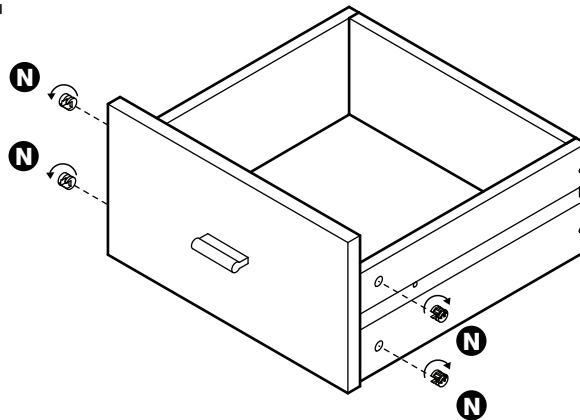



## Step 10

### Inserting drawers

**a:** Slide the assembled drawers fully onto the runners so the runners butt up against the back of the drawer front.

**b:** From inside drawer, fix through drawer sides into the runners using Screws **R**.

**a:**

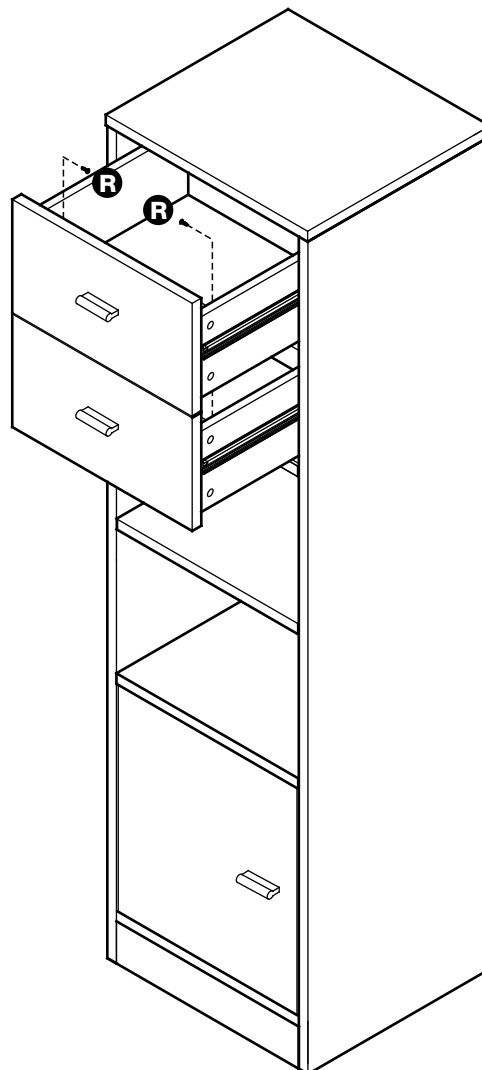

# Assembly Instructions

## Step 11

### Fixing to wall

It is recommended that the unit is fixed to a wall.

Use Screw **E** to fix the Wall strap **S** onto the back of top panel.

With help, move unit into position.



**Warning:**  
The unit is heavy.  
**Lift with care.**

Mark fixing hole on wall and remove unit.


Drill a hole and insert Wall plug **T**.





**Warning:**  
Before drilling,  
check wall for  
hidden pipes and  
cables.

Reposition unit and fix Wall strap using Screw **S**.

**Note:** Before use allow the Glue to dry for 24 hours and make sure the unit is secure.

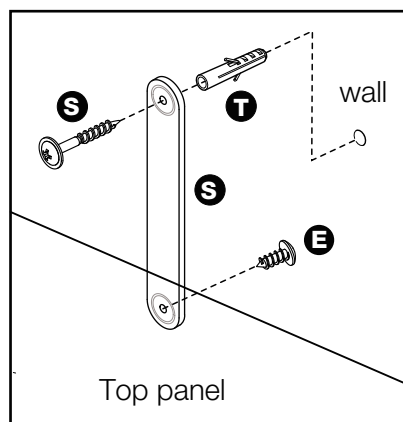

**Note:** Wall plugs supplied are for solid wall only.  
The correct type of fixing must be used for your wall, seek professional advice if in doubt

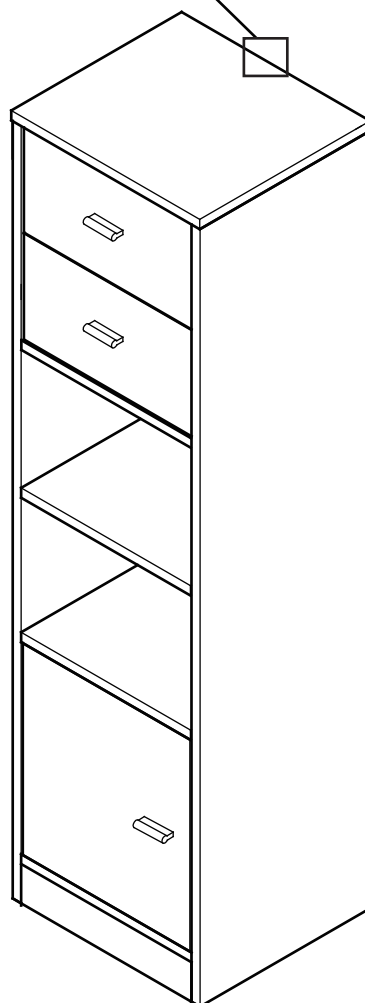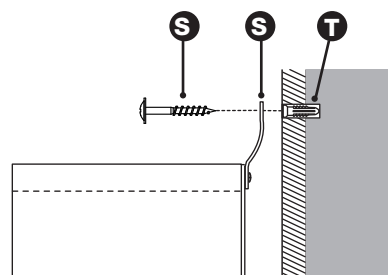

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

# A Guide to - Wall Mounting & Fixings

## Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



**Important:** When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:** Always use a larger screw and wall plug if you are not sure.
- 2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

## Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

### No.1 "General Purpose" wall plug

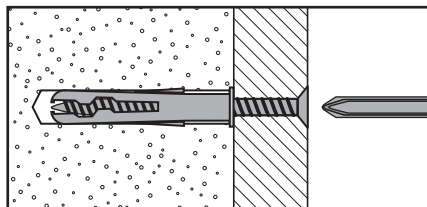


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

### No.2 "Plasterboard" wall plug

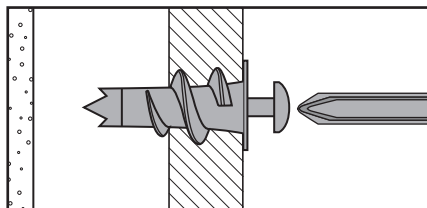


For use when attaching light loads on to plasterboard partitions.

### No.3 "Cavity Fixing" wall plug

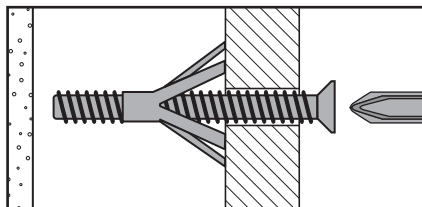


For use with plasterboard partitions or hollow wooden doors.

### No.4 "Cavity Fixing-Heavy Duty" wall plug

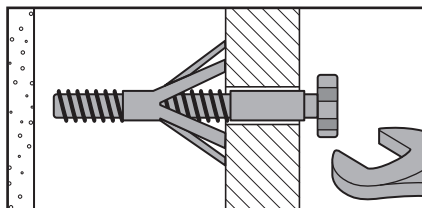


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

### No.5 "Hammer Fixing" wall plug

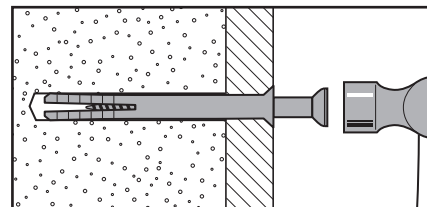

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

### No.6 "Shield Anchor" wall plug Heavy loads

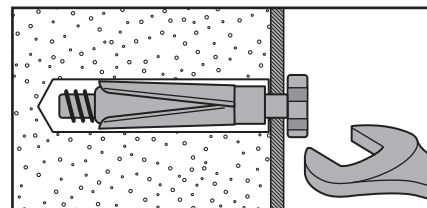

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



## Care & Maintenance

**Safety:** Always check the fitting and location to ensure your safety in and around the home.

**Fitting:** From time to time check the fitting to ensure the wall plugs or screws do not become loose.